
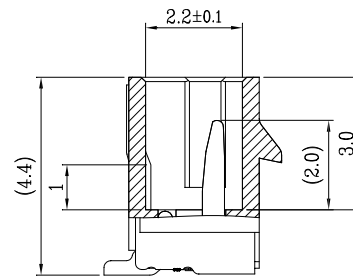


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer LCP、PA6T、UL94V-0
PIN Brass Tin-plated
Solder tad Phosphoric bronze Tin-plated

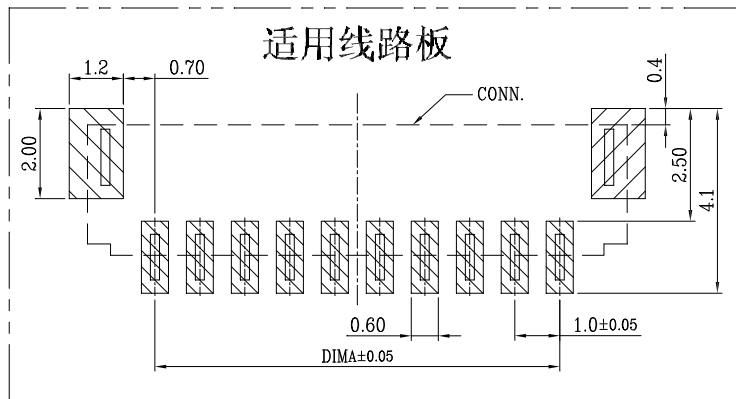

SECTION A-A

编号	尺寸 (mm)		
	A	B	C
HC-G1.0-2PLT	1.00	2.50	4.00
HC-G1.0-3PLT	2.00	3.50	5.00
HC-G1.0-4PLT	3.00	4.50	6.00
HC-G1.0-5PLT	4.00	5.50	7.00
HC-G1.0-6PLT	5.00	6.50	8.00
HC-G1.0-7PLT	6.00	7.50	9.00
HC-G1.0-8PLT	7.00	8.50	10.00
HC-G1.0-9PLT	8.00	9.50	11.00
HC-G1.0-10PLT	9.00	10.50	12.00
HC-G1.0-11PLT	10.00	11.50	13.00
HC-G1.0-12PLT	11.00	12.50	14.00

GENERAL TOLERANCE		制 图	钱岳生	料 号	HC-G1.0-NPLT	版本	A
X.±0.25	X.*±2°	DRAWING	2017、06、01	PART NO.	立 贴 WAFER SMT TYPE	REV.	
.X±0.20	.X*±1°	审 核	张 名	品 名		买 次	1/1
.XX±0.15	.XX*±0.5°	CHECK	2017、06、03	客 户 料 号	客户料号		
.XXX±0.10	.XXX*±0.5°	核 准	张 名	CUSTOMER NO.			
		APPROVAL	2017、06、05	深圳市华灿天禄电子有限公司			
		单 位	MM				
		UNITS		SCALE			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HCTL](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#)
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#)
[FCN-367T-T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-41-018-10-001000](#)