
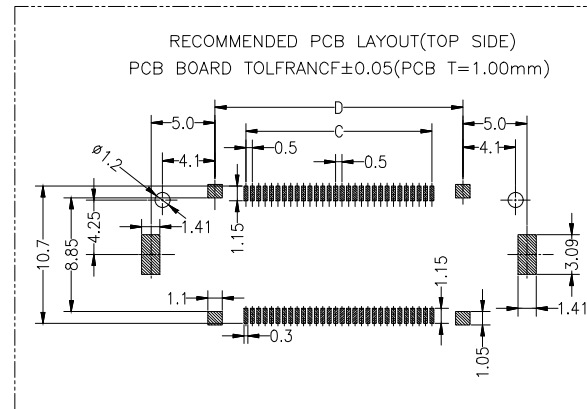
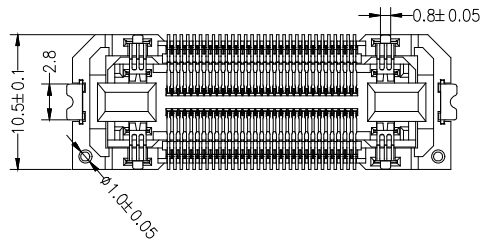



Ass'y High(H)	Plastic High	
	Male (H1)	Female (H2)
8.00	6.90	6.00
10.00	8.90	6.00

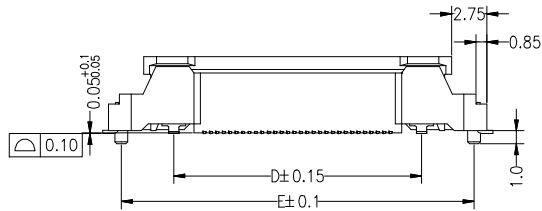

**SPECIFICATIONS  
PERFORMANCE**

Current Rating (信号端子): 0.5A  
 Current Rating (电源端子): 5A  
 Contact Resistance: 80mΩMax  
 Insulation Resistance: 500MΩMin  
 Withstand Volt: 200V AC/minute  
 Oprating Temperature: -40°C to +105°C

**Material**

Contact: Phosphor Bronze, 3u"MIN Gold Plated In Contact Area,  
 Gold Flash Plated In Solder Area,  
 50u"~240u" Nickel Underplated Over all.  
 Ground: Brass, 80u" Min Matte Tin Plated Over  
 50u" Min Nickel Underplated Over all.  
 Housing: LCP Black, UL94V0  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

PIN	A	B	C	D	E
30 Pin	22.00	8.30	7.00	11.80	20.00
50 Pin	27.00	13.30	12.00	16.80	25.00
60 Pin	29.50	15.70	14.50	19.30	27.50
80 Pin	34.50	20.70	19.50	24.30	32.50
100 Pin	39.50	25.70	24.50	29.30	37.50
120 Pin	44.50	30.70	29.50	34.30	42.50

**Ordering Information**

HC-PBB23L - NDS - 0.5V - \*\* - 01

No. of Pins	Nature DS-Female	PITCH	Contact Plating
30~120Pin	(05)	0.5V±0.5mm	G2:3u" Gold
30~30Pin			S0:1u" Gold/Tin
5~50Pin			S1:3u" Gold/Tin
			S2:5u" Gold/Tin
			S3:10u" Gold/Tin
			S4:15u" Gold/Tin
			S5:30u" Gold/Tin

			GENEAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	BTB 0.5 高频大电流 浮动式 HG.0 贴片母座	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	HC-PBB23L-NDS-0.5V-XX-01	单位 UNITS	mm
1	初版发行		X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX ±0.10	投影 Projection				
			Angle ±3.0°					

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [HCTL](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [MIS-048-01-F-D-DP-K](#)  
[832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [MDF7-40DP-2.54DSA\(55\)](#)  
[55323-1519](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [75140-7012](#) [87471-650](#) [1744382-4](#) [063209](#) [10124054-515LF](#) [68685-603](#)  
[8-1616154-3](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FX23-40P-0.5SV15B](#) [FCN-214J100-G/0](#) [354184](#) [P50-028-DDS-TG](#) [53309-2471](#)  
[54546-2071](#) [1586617-1](#) [504248-1210](#) [504248-2010](#) [1-1437355-2](#) [9159005551906](#) [NDS100-004-BF](#) [93696-730LF](#) [91922-31141LF](#) [505274-](#)  
[3440](#) [501493-2410](#) [504208-3410](#) [505006-0811](#) [505274-2040](#) [202436-1600](#) [202477-0414](#) [71660-7580](#) [73420-5192](#) [360-10-107-00-001000](#)