

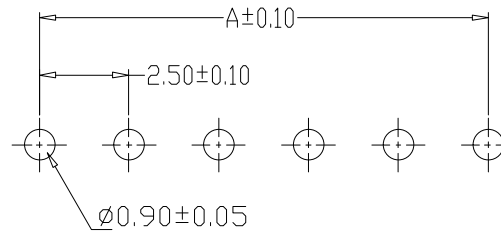


### SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0  
PIN Brass Tin-plated

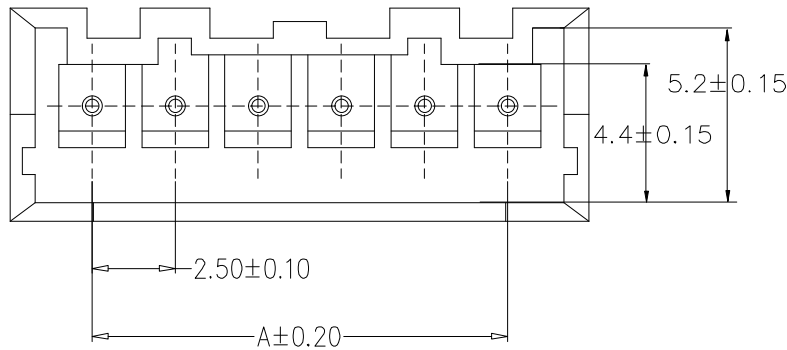

编号	尺寸 (mm)	
	A	B
HC-XA-2A	2.50	7.50
HC-XA-3A	5.00	10.00
HC-XA-4A	7.50	12.50
HC-XA-5A	10.00	15.00
HC-XA-6A	12.50	17.50
HC-XA-7A	15.00	20.00
HC-XA-8A	17.50	22.50
HC-XA-9A	20.00	25.00
HC-XA-10A	22.50	27.50
HC-XA-11A	25.00	30.00
HC-XA-12A	27.50	32.50
HC-XA-13A	30.00	35.00
HC-XA-14A	32.50	37.50
HC-XA-15A	35.00	40.00
HC-XA-20A	47.50	52.50

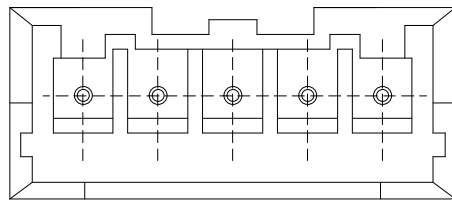

2~5A

### PCB LAYOUT

GENERAL TOLERANCE		制图 DRAWING 2015、07、01	料号 PART NO.	HC-XA-NA	版本 REV.	A
X.±0.25	X.'±2'		品名 TITLE	XA-A	页次 SHEET	1/1
.X±0.20	.X'±1'		核准 CHECK	客户料号 CUTL NO.		
.XX±0.15	.XX'±0.5'		核准 APPROVAL			
.XXX±0.10	.XXX'±0.5'	单位 UNITS	MM	比例 SCALE	1:1	深圳市华灿天禄电子有限公司

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HCTL](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)  
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)  
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)  
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)  
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)  
[001000](#)