
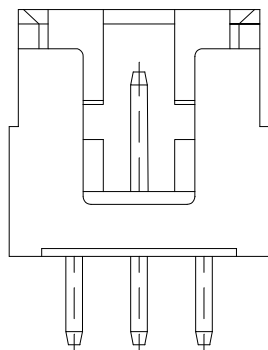
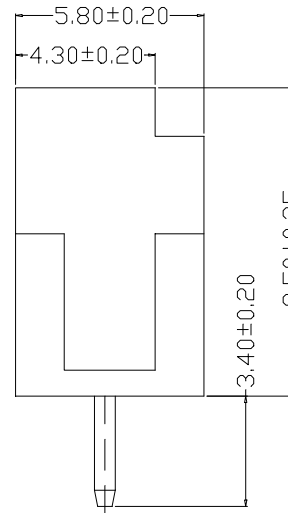
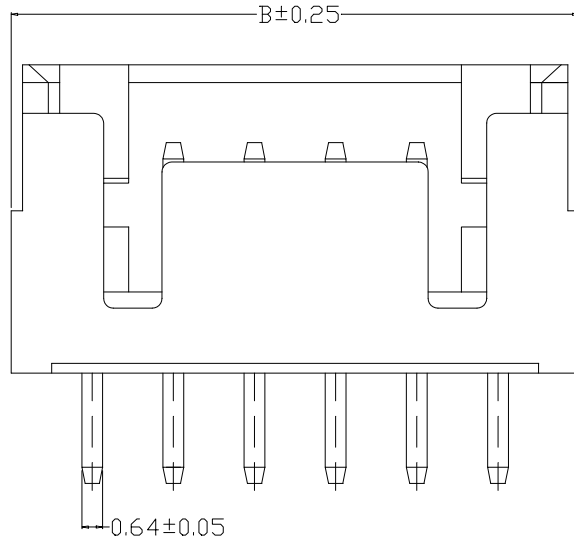



版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

SPECIFICATIONS


- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 30mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer PA66, Beige UL94V-0
PIN Brass Tin-plated

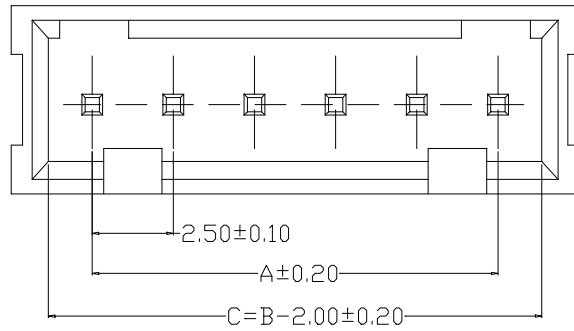

3A

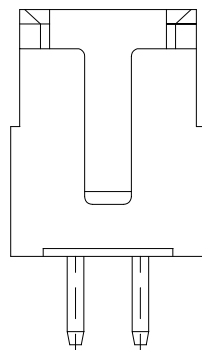

2A

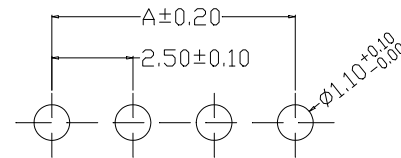

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
HC-XHD-2P-G1	2.50	7.50
HC-XHD-3P-G1	5.00	10.00
HC-XHD-4P-G1	7.50	12.50
HC-XHD-5P-G1	10.00	15.00
HC-XHD-6P-G1	12.50	17.50
HC-XHD-7P-G1	15.00	20.00
HC-XHD-8P-G1	17.50	22.50
HC-XHD-9P-G1	20.00	25.00
HC-XHD-10P-G1	22.50	27.50
HC-XHD-11P-G1	25.00	30.00
HC-XHD-12P-G1	27.50	32.50
	47.50	52.50

GENERAL TOLERANCE		制图 DRAWING	料号 PART NO.	HC-XHD-NP-G1	版本 REV.	A
X.X±0.25	X.*±2°	审核 CHECK	品名 TITLE	XHD2.5直针 WAFER DIP TYPE	页次 SHEET	1/1
X.XX±0.20			客户料号 CUSTM. NO.			
X.XXX±0.10		核准 APPROVAL				
		单位 UNITS				
		MM	比例 SCALE	1:1	深圳市华灿天禄电子有限公司	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HCTL](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#)
[622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-015LF](#)
[66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#)
[80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#)
[803-43-024-10-001000](#)