




Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

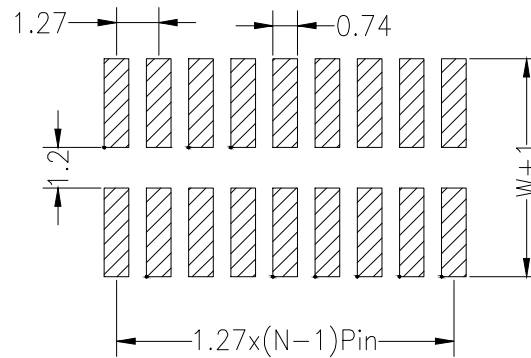

SPECIFICATIONS  
Rated Current:1.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

| Dimension antitheses list |      |      |      |      |
|---------------------------|------|------|------|------|
| ITEM                      | PA   | PB   | W    | L    |
| Standard                  | 4.00 | 1.50 | 5.30 | 7.20 |
| Alternate                 |      |      |      |      |

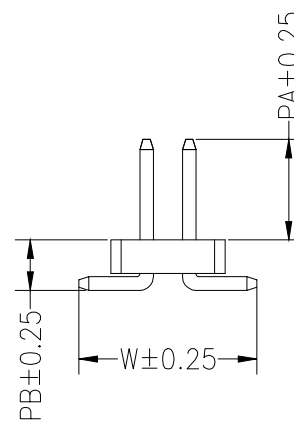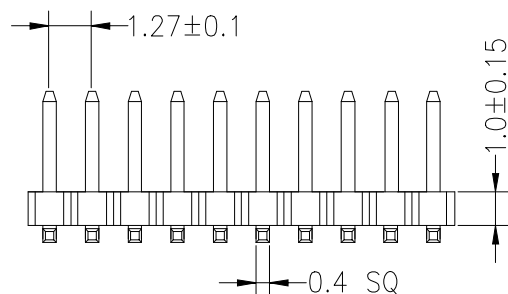

**Ordering Information**

PZ 127 - \* - N - S - \* - \*\*

|  |                       |                              |                  |  |
|--|-----------------------|------------------------------|------------------|--|
| No.of Rows<br>1=Single Row<br>2=Dual Row | No.of Pins<br>2-40Pin | Type<br>2=排针<br>3=弯针<br>4=插针 | Length<br>(产品型高) | Contact Plating<br>G0:Gold Flash<br>G1:1u" Gold<br>G2:3u" Gold<br>G3:5u" Gold<br>G4:10u" Gold<br>G5:15u" Gold<br>G6:30u" Gold<br>S0:Gold Flash/Tin<br>S1:Tin |
|--|-----------------------|------------------------------|------------------|--|

|            |                           |                    | GENEAL TOLERANCE |       | 制 图<br>DRAWING    |  | 深圳市华灿天禄电子有限公司<br>ShenzhenhuacantianluELECTRONICS CO.,LTD |                     |              |     |
|------------|---------------------------|--------------------|------------------|-------|-------------------|--|--|---------------------|--------------|-----|
|            |                           |                    | DIM              | TOL   | 审 核<br>CHECK      |  | 产 品 名 称<br>TITLE   | 1.27双排 排针 贴片(塑高1.0) | 版 本<br>REV.  | A   |
|            |                           |                    | X.X              | ±0.30 | 批 准<br>APPROVAL   |  | 产 品 料 号<br>PART NO.                                      | PZ127-2-N-S-1.0-XX  | 单 位<br>UNITS | mm  |
|            |                           |                    | X.XX             | ±0.20 | 比 例<br>SCALE      |  | 材 料<br>MATERIAL  |                     | 页 次<br>SHEET | 1/1 |
|            |                           |                    | X.XXX            | ±0.10 | 投 影<br>Projection |  |  |                     |              |     |
| 序 号<br>No. | 变 更 内 容<br>MODIFY CONTENT | 日 期<br>MODIFY DATE | Angle            | ±3.0° |                   |  |  |                     |              |     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HCTL](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)