
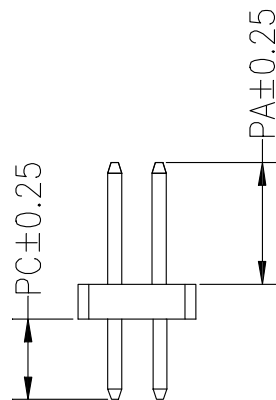
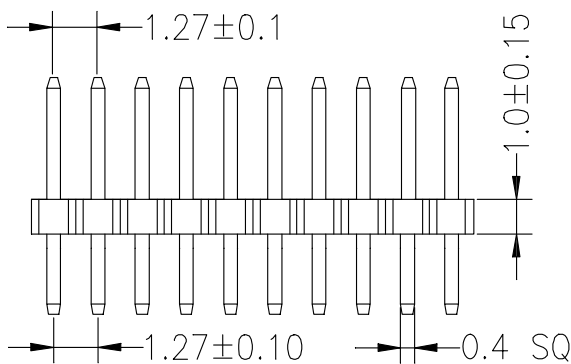


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

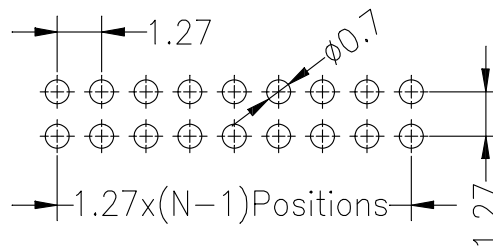

SPECIFICATIONS  
Rated Current:1.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

| Dimension antitheses list |      |      |      |
|---------------------------|------|------|------|
| ITEM                      | PA   | PC   | L    |
| Standard                  | 3.80 | 2.40 | 7.20 |
| Alternate                 |      |      |      |

**Ordering Information**

PZ 127 - \* - N - Z - \* - \*\*

|   |                        |                              |                 |  |
|---|------------------------|------------------------------|-----------------|--|
| No. of Rows<br>1=Single Row<br>2=Dual Row | No. of Pins<br>2-40Pin | Type<br>2-直插<br>3-贴片<br>5-插接 | Length<br>产品总长度 | Contact Plating<br>G0:Gold Flash<br>G1:1u" Gold<br>G2:3u" Gold<br>G3:5u" Gold<br>G4:10u" Gold<br>G5:15u" Gold<br>G6:30u" Gold<br>S0:Gold Flash/Tin<br>S1:Tin |
|---|------------------------|------------------------------|-----------------|--|

|           |                        |                   | GENERAL TOLERANCE |       | 制图<br>DRAWING    |  | 深圳市华灿天禄电子有限公司<br>ShenzhenhuacantianluELECTRONICS CO.,LTD |                    |             |     |
|-----------|------------------------|-------------------|-------------------|-------|------------------|--|--|--------------------|-------------|-----|
|           |                        |                   | DIM               | TOL   | 审核<br>CHECK      |  |  |                    |             |     |
|           |                        |                   | X.X               | ±0.30 | 批准<br>APPROVAL   |  | 产品名称<br>TITLE  | 1.27双排 排针 直针       | 版本<br>REV.  | A   |
|           |                        |                   | X.XX              | ±0.20 | 比例<br>SCALE      |  | 产品料号<br>PART NO.   | PZ127-2-N-Z-7.2-XX | 单位<br>UNITS | mm  |
| 序号<br>No. | 变更内容<br>MODIFY CONTENT | 日期<br>MODIFY DATE | X.XXX             | ±0.10 | 投影<br>Projection |  | 材料<br>MATERIAL   |                    | 页次<br>SHEET | 1/1 |
|           |                        |                   | Angle             | ±3.0° |                  |  |  |                    |             |     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HCTL](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)