

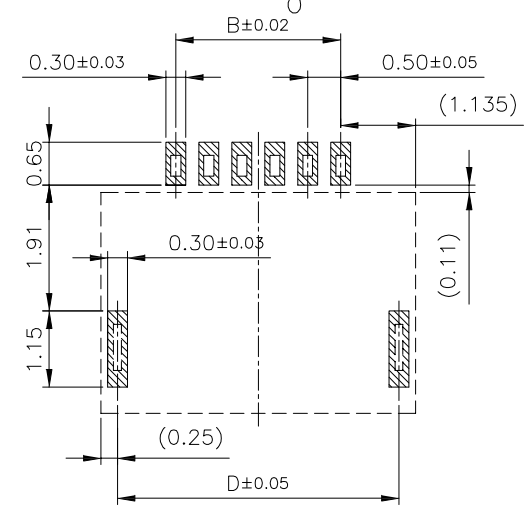
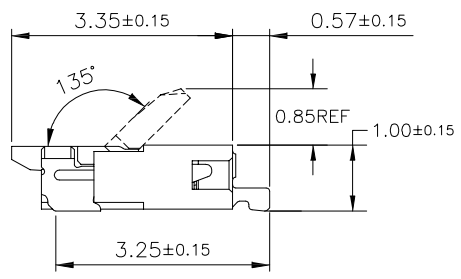
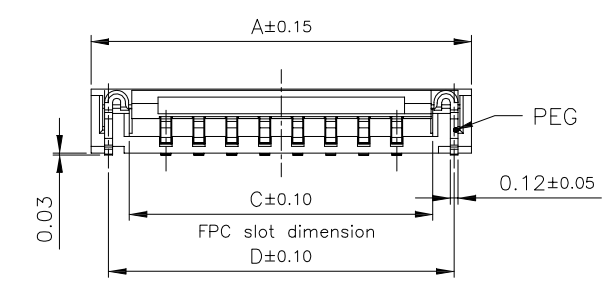
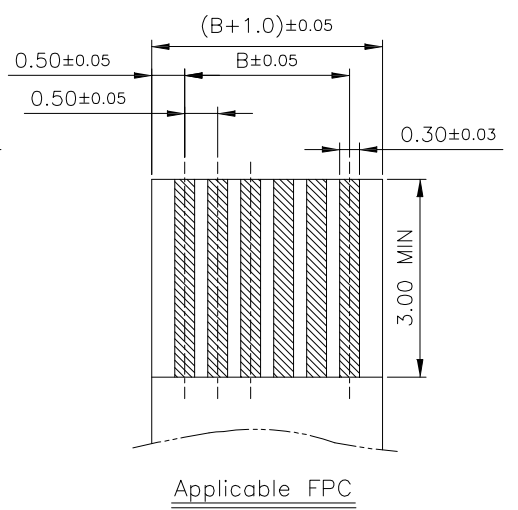


| 修改 | | 标记 | 修改摘要 | 签名 | 日期 |
|-----|----|------|----------------------|-----------|------------|
| REV | NO | MARK | REVISION DESCRIPTION | SIGNATURE | DATE |
| | | | NEW DWG | | 2016-03-12 |


- NOTES:
- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC, UL 94V-0,COLOR:WHITE;
COVER: HIGHT-TEMP PLASTIC, UL 94V-0,COLOR:BLACK;
CONTACT: COPPER ALLOY;
PEG: COPPER ALLOY;
 - PLATING:
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL.
PEG: TIN PLATED ON NICKEL OVERALL.
 - RATING:
CURRENT RATING: 0.4A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -55°C~+85°C;

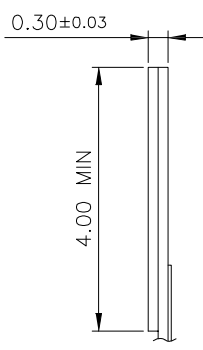

| PIN NO. | DIM. A | DIM. B | DIM. C | DIM. D | PIN NO. | DIM. A | DIM. B | DIM. C | DIM. D |
|---------|--------|--------|--------|--------|---------|------------|-----------|-----------|------------|
| 04 | 3.77 | 1.50 | 2.60 | 3.27 | 23 | 13.27 | 11.50 | 12.10 | 12.77 |
| 05 | 4.27 | 2.00 | 3.10 | 3.77 | 24 | 13.77 | 11.50 | 12.60 | 13.27 |
| 06 | 4.77 | 2.50 | 3.60 | 4.27 | 25 | 14.27 | 12.00 | 13.10 | 13.77 |
| 07 | 5.27 | 3.00 | 4.10 | 4.77 | 26 | 14.77 | 12.50 | 13.60 | 14.27 |
| 08 | 5.77 | 3.50 | 4.60 | 5.27 | 27 | 15.27 | 13.00 | 14.10 | 14.77 |
| 09 | 6.27 | 4.00 | 5.10 | 5.77 | 28 | 15.77 | 13.50 | 14.60 | 15.27 |
| 10 | 6.77 | 4.50 | 5.60 | 6.27 | 29 | 16.27 | 14.00 | 15.10 | 15.77 |
| 11 | 7.27 | 5.00 | 6.10 | 6.77 | 30 | 16.77 | 14.50 | 15.60 | 16.27 |
| 12 | 7.77 | 5.50 | 6.60 | 7.27 | 31 | 17.27 | 15.00 | 16.10 | 16.77 |
| 13 | 8.27 | 6.00 | 7.10 | 7.77 | 32 | 17.77 | 15.50 | 16.60 | 17.27 |
| 14 | 8.77 | 6.50 | 7.60 | 8.27 | 33 | 18.27 | 16.00 | 17.10 | 17.77 |
| 15 | 9.27 | 7.00 | 8.10 | 8.77 | 34 | 18.77 | 16.50 | 17.60 | 18.27 |
| 16 | 9.77 | 7.50 | 8.60 | 9.27 | 35 | 19.27 | 17.00 | 18.10 | 18.77 |
| 17 | 10.27 | 8.00 | 9.10 | 9.77 | 36 | 19.77 | 17.50 | 18.60 | 19.27 |
| 18 | 10.77 | 8.50 | 9.60 | 10.27 | 37 | 20.27 | 18.00 | 19.10 | 19.77 |
| 19 | 11.27 | 9.00 | 10.10 | 10.77 | 38 | 20.77 | 18.50 | 19.60 | 20.27 |
| 20 | 11.77 | 9.50 | 10.60 | 11.27 | 39 | 21.27 | 19.00 | 20.10 | 20.77 |
| 21 | 12.27 | 10.00 | 11.10 | 11.77 | 40 | 21.77 | 19.50 | 20.60 | 21.27 |
| 22 | 12.77 | 10.50 | 11.60 | 12.27 | n | n*0.5+1.77 | (n-1)*0.5 | n*0.5+0.6 | n*0.5+1.27 |

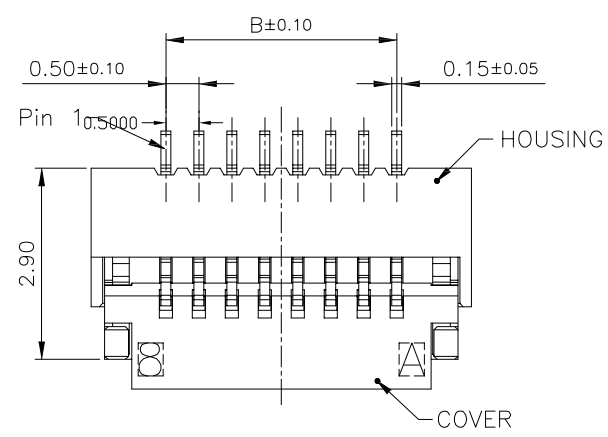

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co., LTD
电话: 0755-23304126 传真: 0755-29940187

| -TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表 | |   | | TITLE: 产品名称: FPC 0.5间距1.0高掀盖式 | | | | |
|---|-------|---|-----|----------------------------------|--------------------------------|-------|------|-------------|
| X.X | ±0.30 | X.X* | ±3° | APPD: 核准: | PART NO: 产品编号: 0.5K-QX-nPWB | | | |
| X.XX | ±0.20 | X.XX* | ±2° | CHECK: 校对: 王建业 | DATE | SCALE | UNIT | CODE NUMBER |
| X.XXX | ±0.10 | X.XXX* | ±1° | DRAW: 绘图: 黄艳兰 | 2016-03-12 | 1:1 | mm | A001 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [HDGC](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)