





CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C 全塑带灯	MJ5688-XX11-GRNLX

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	XSY	2015.01.16
A02	—	修正PCB LAYOUT	XSY	2015.07.09


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	XSY	2015.01.16
A02	—	修正PCB LAYOUT	XSY	2015.07.09

SPECIFICATION

1. VOLTAGE RATING: 150 VAC RMS.
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 40 mΩ MAX
4. INSULATION RESISTANCE: 500MΩ MIN.
5. WITHSTAND VOLTAGE: AC1000V RMS 60s.
6. OPERATING TEMPERATURE: -40°C~+80°C

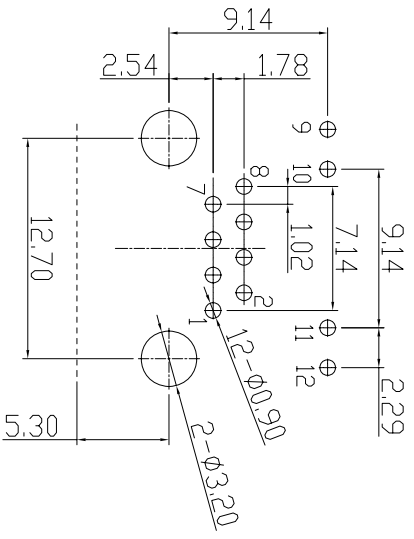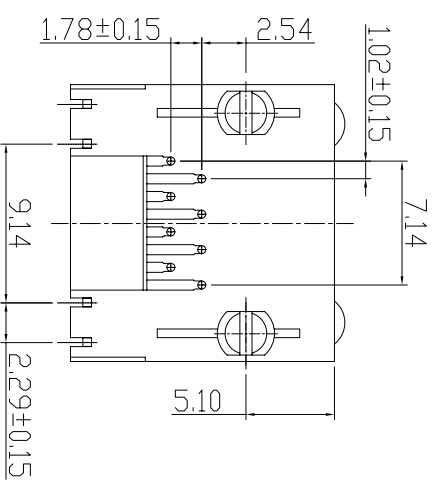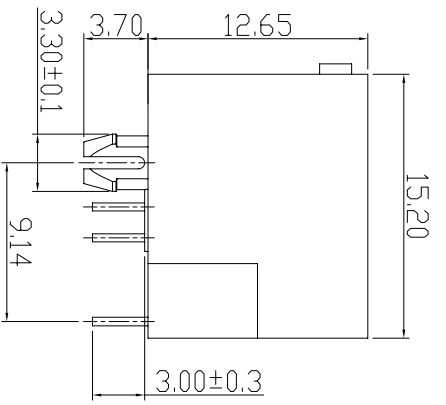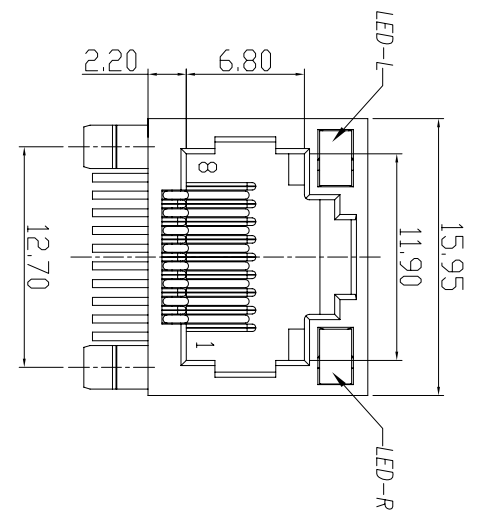

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm



MJ5688-XX11-GRNLX

X	LED-L	LED-R
1	Green	Yellow
2	Yellow	Green

Table 3

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

Table 2


X	Housing Color	Housing Material
B	Black	PBT UL94V-0
U	Blue	
Y	Yellow	PA9T UL94V-0
1	Black	
2	Blue	
3	Yellow	

Table 1

d	LED-R	1	SEE TABLE 3	Tin PLATING	
c	LED-L	1	SEE TABLE 3	Tin PLATING	
b	TERMINAL	8	PHOSPHOR BRONZE φ0.46mm	SEE TABLE 2	
a	HOUSING	1	SEE TABLE 1	SEE TABLE 1	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

d	LED-R	1	SEE TABLE 3	Tin PLATING	
c	LED-L	1	SEE TABLE 3	Tin PLATING	
b	TERMINAL	8	PHOSPHOR BRONZE φ0.46mm	SEE TABLE 2	
a	HOUSING	1	SEE TABLE 1	SEE TABLE 1	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	DECIMALS:	ANGLES:
	X : ±0.5	X : ±2°
	XX : ±0.3	XX : ±1°
	XXX : ±0.2	


东莞市合陵电子有限公司
 DongGuan Heling Electronic Co.,LTD
 Connector

SCALE: 1/1	UNIT: mm	DWG. NO:
SIZE: A3	PAGE: 1 OF 1	WI-061-064
APPROVED BY	CHECKED BY	PREPARED BY
DICK	XSY	XSY
CUSTOMER COPY		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [Heling](#) manufacturer:

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#)
[GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [A-2014-0-4](#)
[GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2N](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#)
[155302-001](#) [AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102288](#) [AX102651](#)
[AX102660](#) [AX104024](#) [203475](#) [J0012D21NL](#) [J0026D01ENL](#) [PC4D0018P](#) [KIT38082NI](#) [8949-B88/6](#) [2-6609208-5](#) [303066VFL](#) [303068V](#)
[303088LFLSA](#) [303088SBL](#) [30-8603](#)