


## Specification Sheet

Part Number: 156-04601

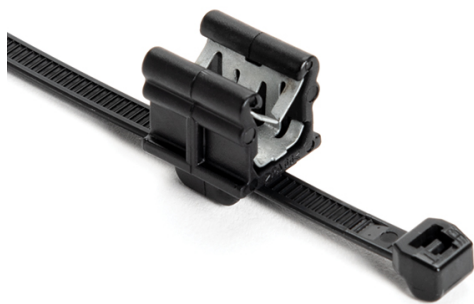

Outside Serrated Cable Tie & Edge Clip, 6.0" Long, EC19, 3-6 mm Panel, 50lb, PA66HS, Black, 500/pkg

**Article Number** 156-04601

**Type** T50SOSEC19

**Color** Black (BK)

**Features & Benefits**

- Edge Clip applies easily to plastic and metal sheets without the need for a mounting hole.
- Edge Clip provides low insertion force and high extraction force ideal for assembly environments.
- Two piece assembly allows the mount to slide along the strap ensuring proper orientation.
- Cable tie is outside serrated to reduce bundle chafing.

**Quantity Per** bag

<b>Product Description</b>	HellermannTyton's Two Piece Edge Clip with Cable Tie Assemblies are designed specifically to route bundles by securing them to the edge of a plastic or metal sheet without the need for a mounting hole. The clip is easy to secure and the extraction force is high due to the integrated metal clamp that holds the edge clip in place.
<b>Short Description</b>	Outside Serrated Cable Tie & Edge Clip, 6.0" Long, EC19, 3-6 mm Panel, 50lb, PA66HS, Black, 500/pkg
<b>Global Part Name</b>	T50SOSEC19-PA66HS/PA66HIRHS-BK
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	225
<b>Length L (Imperial)</b>	6.0
<b>Length L (Metric)</b>	150.0
<b>Fixation Method</b>	EdgeClip, top, assembled, 2 piece
<b>Identification Plate Position</b>	none
<b>Variant</b>	Outside Serrated
<b>Width W (Imperial)</b>	0.18
<b>Width W (Metric)</b>	4.6
<b>Bundle Diameter Min (Imperial)</b>	0.20
<b>Bundle Diameter Min (Metric)</b>	1.0

<b>Bundle Diameter Max (Imperial)</b>	1.4
<b>Bundle Diameter Max (Metric)</b>	35.0
<b>Thickness T (Imperial)</b>	0.05
<b>Height H (Imperial)</b>	0.05
<b>Height H (Metric)</b>	1.3
<b>Panel Thickness Min(Imperial)</b>	0.12
<b>Panel Thickness Max(Imperial)</b>	0.24
<b>Panel Thickness Min (Metric)</b>	3.0
<b>Panel Thickness Max (Metric)</b>	6.0
<b>Material</b>	Polyamide 6.6 heat stabilized (PA66HS) Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
<b>Material Shortcut</b>	PA66HS PA66HIRHS
<b>Material Cable Tie</b>	Polyamide 6.6 heat stabilized (PA66HS)
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature (Metric)</b>	-40°F to +221°F (-40°C to +105°C)
<b>Reach Complaint(Article 33)</b>	Yes

<b>ROHS Complaint</b>	Yes
<b>Package Quantity(Imperial)</b>	500
<b>Package Quantity (Metric)</b>	500
<b>Customs Number</b>	3926909988
<b>Content Unit(BMEcat)</b>	pcs.
<b>Weight (Metric)</b>	1.9
<b>Weight (Imperial)</b>	0.075

© 2020 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Ties](#) category:*

*Click to view products by [Hellermann](#) manufacturer:*

Other Similar products are found below :

[20093-0](#) [SJ-3463](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#) [SJ-3571-1"x50yd-Black](#) [20113-0](#)  
[T56137](#) [3-350087-0](#) [CTB75X75BKA-C](#) [3722](#) [561-B110120](#) [561-EZAB580T](#) [561-EZS375B40](#) [561-N3510](#) [561-TA250125](#) [08350-0](#) [08443-0](#)  
[08600-0](#) [10035-0](#) [10036-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [561-EZ250](#) [561-EZ500](#) [561-EZ625](#) [561-EZ750](#) [561-TA00600](#) [SJ3519FR](#)  
[BLACK 1X50](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#) [SJ3572-2"x50yd-Black](#) [157-00039](#) [3719](#) [SJ-3401 BLACK 1"](#) [08445-0](#)  
[08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10056-0](#) [10620-0](#) [10345-0](#) [10344-0](#) [08416-0](#) [08384-0](#) [08401-0](#)