



### Heat Shrinkable Cable Repair Sleeves

#### RMS

RMS wrap-around sleeves are easy to install.

#### Features and Benefits

- Fast, moisture proof and permanent repair of cable jackets
- Only 6 sizes for a wide range of cable diameters: from 10 mm up to 160 mm
- Available in 4 standard lengths, custom lengths available on request
- Each RMS kit is ready for use and comes with instruction sheet, abrasive strip and cleaning sachet
- Weather resistant and halogen free
- TCP (thermo-chromatic paint) spots indicate the sleeve has been sufficiently heated



Application video: RMS




RMS wrap-around sleeves for rapid and secure cable repair on site.

<b>MATERIAL</b>	Polyolefin, Chemically cross-linked (PO-X)
<b>Shrink Ratio</b>	up to 4.5:1
<b>Operating Temperature</b>	-40 °C to +120 °C
<b>Minimum Shrink Temperature</b>	+110 °C
<b>Softening Point Adhesive</b>	+105 °C
<b>Longitudinal change after shrinkage</b>	-10 % max.
<b>Dielectric Strength</b>	30 kV/mm
<b>Flammability</b>	not flame retarded



RMS: Repair sleeve, steel closure, abrasive strip, cleaning sachet, instruction sheet.

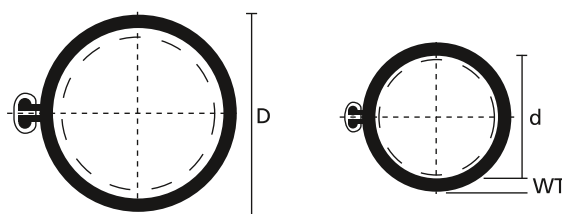

Cable Repair Sleeve RMS with adhesive

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Suitable for Cable Ø from/to	Length (L)	Colour	Article-No.
<b>RMS 43-10</b>	43	10.0	2.30	15 - 35	250.0	Black (BK)	450-20000
	43	10.0	2.30	15 - 35	500.0	Black (BK)	450-20001
	43	10.0	2.30	15 - 35	750.0	Black (BK)	450-20004
	43	10.0	2.30	15 - 35	1,000.0	Black (BK)	450-20002
<b>RMS 52-15</b>	52	15.0	2.30	20 - 45	250.0	Black (BK)	450-20010
	52	15.0	2.30	20 - 45	500.0	Black (BK)	450-20011
	52	15.0	2.30	20 - 45	750.0	Black (BK)	450-20014
	52	15.0	2.30	20 - 45	1,000.0	Black (BK)	450-20012
<b>RMS 76-22</b>	76	22.0	2.50	28 - 65	500.0	Black (BK)	450-20021
	76	22.0	2.50	28 - 65	750.0	Black (BK)	450-20024
	76	22.0	2.50	28 - 65	1,000.0	Black (BK)	450-20022
<b>RMS 100-30</b>	100	30.0	2.54	35 - 85	500.0	Black (BK)	450-20030
	100	30.0	2.54	35 - 85	1,000.0	Black (BK)	450-20031
<b>RMS 139-38</b>	139	38.0	2.77	45 - 120	1,000.0	Black (BK)	450-20041
<b>RMS 185-55</b>	185	55.0	2.74	65 - 160	1,000.0	Black (BK)	450-20050

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hellermann](#) manufacturer:*

Other Similar products are found below :

[111-03250](#) [RSB2](#) [T18RPOCKETPAC](#) [380-03003](#) [406064A](#) [TSR1I-21](#) [TSR1I-29](#) [TSR1I-33](#) [TSR1I-36](#) [1122-4JW8](#) [1126-4JW8](#) [RSB6](#)  
[MS3109-12AU](#) [Q30LR-PA66-BK-C1](#) [Q18I-PA66-BK-C1](#) [CTQM5-PA66-BK-C1](#) [LKCSF1.NB3P](#) [HWCLIP16 BLACK](#) [T50IDH0C2](#)  
[LOK01B.NB3P](#) [AS45](#) [T120R.RN3P](#) [184-10168](#) [MK7.9A](#) [181-50840](#) [TWT2](#) [MCTPP120R](#) [MBT14SFC](#) [E4500](#) [TSRI-JB2](#) [309-65110](#) [309-](#)  
[65129](#) [309-65214](#) [309-65298](#) [309-65300](#) [309-65117](#) [309-65118](#) [309-65164](#) [NGM20-RED](#) [NGM32-DGY](#) [GSS3](#) [321-50012](#) [H75X25](#)  
[BLACK 500](#) [HIS-3-9/3-PEX-CL](#) [HIS-3 12/4 CLR](#) [HISA-18/6-PEX-CL](#) [HGDC2-5BW/1](#) [HELADUCT FLEX30 SK](#) [T50RS5.NB3P](#) [T30LR](#)