


Specification Sheet

Part Number: T30RSF9M4

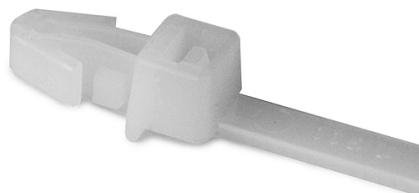

1-Piece Cable Tie/Arrowhead Mount, 6.3"L, 30lb, 0.04"–0.09" Panel Thickness, PA66, Natural, 1000/pkg

Article Number 126-00704

Type T30RSF(U)

Color Natural (NA)

Features & Benefits

- All-in-one bundling and fastening solution reduces costs and assembly time.
- The arrowhead design of these ties offers a low insertion force and a high extraction force.
- High-spec materials and superior design deliver versatility, performance and value.

Quantity Per bag

Product Description One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. The arrowhead design of this push mount inserts easily and locks securely in place. HellermannTyton's one-piece mounting ties combine high-specification materials with superior design to deliver dependable performance in a range of applications.

Short Description 1-Piece Cable Tie/Arrowhead Mount, 6.3"L, 30lb, 0.04"–0.09" Panel Thickness, PA66, Natural, 1000/pkg

Global Part Name T30RSF(U)-PA66-NA

Minimum Tensile Strength (Imperial) 30.0

Minimum Tensile Strength (Metric) 135

Length L (Imperial) 6.3

Length L (Metric) 160.02

Fixation Method Arrowhead

Identification Plate Position none

Releasable Closure No

Tie Closure plastic pawl

Variant Inside Serrated

Width W (Imperial) 0.14

Width W (Metric) 3.6

Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.6
Bundle Diameter Max (Imperial)	1.3
Bundle Diameter Max (Metric)	31.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.2
Height H (Imperial)	.20
Height H (Metric)	5.70
Panel Thickness Min(Imperial)	0.035
Panel Thickness Max(Imperial)	0.094
Panel Thickness Min (Metric)	0.9
Panel Thickness Max (Metric)	2.4
Mounting Hole Diameter D (Imperial)	0.19 - 0.22
Mounting Hole Diameter D (Metric)	4.7 - 5.6 mm
Mounting Hole Diameter D Min (Imperial)	0.19
Mounting Hole Diameter D Max (Imperial)	0.22
Mounting Hole Diameter D Max (Metric)	5.6

Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL 94 V2
Operating Temperature (Metric)	-40°F to +185°F (-40°C to +85°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Certification/Specification WEB	UL-ZODZ2.E64139
UL Recognized (US)	Yes
UL Recognized (US and Canada)	Yes
Package Quantity(Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3926909988
Content Unit(BMEcat)	pcs.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Identification](#) category:

Click to view products by [Hellermann](#) manufacturer:

Other Similar products are found below :

[CU6337-000](#) [CU6342-000](#) [FCA-410-12](#) [11631010](#) [1-1768037-1](#) [1-1768037-2](#) [1-1768050-0](#) [PXLK-VI](#) [Q62184-1](#) [A64304-000](#) [QMT221](#)
[HK032WE1NF038B](#) [1330-0519-10](#) [1395199-1](#) [1395200-1](#) [1395202-1](#) [DMVF050WE-300S6](#) [D-SCE-1K-2.4-50-4-CS7834](#) [1538738-1](#)
[E90935-000](#) [EC1238-000](#) [EC1465-000](#) [EC1855-000](#) [EC1859-000](#) [EC1863-000](#) [EC5415-000](#) [EC7277-000](#) [EC7352-000](#) [EC7603-000](#)
[EC7707-000](#) [EC7735-000](#) [EC7768-000](#) [EC7828-000](#) [EC7854-000](#) [EC7952-000](#) [EC8128-000](#) [1768037-8](#) [1768041-7](#) [NC-127191-10-9](#)
[HS048WE2NF038B](#) [C03232-000](#) [HTCM-SCE-14-4H-9](#) [HTMS-3/16-9](#) [HT-SCE-1/4-2.0-4](#) [HT-SCE-3/16-2.0-4](#) [HTTMS-1/2-1.50-9](#) [HTTMS-](#)
[CM-1/2-4H-9](#) [HX-SCE-19.0-50-9](#) [HX-SCE-6.4-50-4](#) [C25254-000](#)