

Screw Fixing Mounts

Cable Tie Mounts with curved design


Designed specifically for holding heavier cable bundles these mounting bases can be used in many industries from agriculture to truck manufacture. They offer a very secure fixing and can be used with a wide variety of heavy duty cable ties up to 8.3 mm width.

Features and benefits

- Curved design for additional cable support
- Simple to install with a screw or bolt
- Excellent security, particularly in areas of high vibration
- Mounts are available in various sizes and materials



Cable Tie Mounts KR6G5, KR8G5 and CTM.

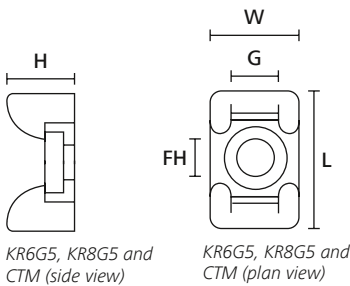

KR6G5, KR8G5 and CTM (side view)

KR6G5, KR8G5 and CTM (plan view)



The KR-E/TFE mounts can ideally be combined with the E/TFE-cable ties on page 51.



Can support quality assurance in the production of food stuffs, for example HACCP.

| TYPE | Width (W) | Length (L) | Height (H) | Hole Ø (FH) | Strap Width max. (G) | Material | Colour | Pack Cont. | Article-No. |
|-----------|-----------|------------|------------|-------------|----------------------|----------|--------------|------------|-------------|
| CTM0 | 9.4 | 14.7 | 6.9 | 3.8 | 5.0 | PA66 | Black (BK) | 100 pcs. | 151-30300 |
| | 9.4 | 14.7 | 6.9 | 3.8 | 5.0 | PA66 | White (WH) | 100 pcs. | 151-30303 |
| CTM1 | 9.4 | 14.7 | 6.9 | 4.8 | 5.0 | PA66 | Black (BK) | 100 pcs. | 151-30400 |
| | 9.4 | 14.7 | 6.9 | 4.8 | 5.0 | PA66 | White (WH) | 100 pcs. | 151-30404 |
| KR6G5 | 11.8 | 17.8 | 8.8 | 4.5 | 6.4 | E/TFE | Blue (BU) | 100 pcs. | 151-00653 |
| MCKR6G5 | 11.8 | 17.8 | 8.8 | 4.5 | 6.4 | PA66MP+ | Blue (BU) | 100 pcs. | 151-00950 |
| KR6G5 | 12.0 | 18.0 | 9.0 | 4.5 | 6.0 | PA66 | Natural (NA) | 100 pcs. | 151-24619 |
| | 12.0 | 18.0 | 9.0 | 4.5 | 6.0 | PA66W | Black (BK) | 100 pcs. | 151-24660 |
| MCKR8G5-5 | 14.3 | 24.8 | 12.0 | 5.2 | 8.3 | PA66MP+ | Blue (BU) | 100 pcs. | 151-01020 |
| KR8G5 | 14.3 | 24.8 | 12.1 | 6.5 | 8.3 | E/TFE | Blue (BU) | 100 pcs. | 151-00654 |
| | 14.5 | 25.0 | 12.0 | 6.5 | 8.0 | PA66 | Natural (NA) | 100 pcs. | 151-24819 |
| | 14.5 | 25.0 | 12.0 | 6.5 | 8.0 | PA66HS | Black (BK) | 100 pcs. | 151-24850 |
| CTM2 | 15.5 | 21.8 | 9.4 | 4.6 | 7.9 | PA66 | Black (BK) | 100 pcs. | 151-30500 |
| | 15.5 | 21.8 | 9.4 | 4.6 | 7.9 | PA66 | White (WH) | 100 pcs. | 151-30504 |
| CTM3 | 15.5 | 21.8 | 9.4 | 5.1 | 7.9 | PA66 | Black (BK) | 100 pcs. | 151-30600 |
| | 15.5 | 21.8 | 9.4 | 5.1 | 7.9 | PA66 | White (WH) | 100 pcs. | 151-30605 |
| CTM4 | 15.8 | 21.8 | 9.4 | 6.4 | 7.9 | PA66 | Black (BK) | 100 pcs. | 151-30700 |
| | 15.8 | 21.8 | 9.4 | 6.4 | 7.9 | PA66 | White (WH) | 100 pcs. | 151-30703 |

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.



For product specific approvals and specifications please refer to the Appendix.

Material Specification Overview

| MATERIAL | Material Shortcut | Operating Temperature | Colour** | Flammability | Material Properties* | Material Specifications |
|---|--------------------|---|--------------------------|--------------|--|-------------------------|
| Aluminium-alloy | AL | -40 °C to +180 °C | Natural (NA) | | <ul style="list-style-type: none"> Corrosion resistant Antimagnetic | RoHS |
| Chloroprene | CR | -20 °C to +80 °C | Black (BK) | | <ul style="list-style-type: none"> Weather-resistant High yield strength | RoHS |
| Ethylene Tetrafluoroethylene (Tefzel®) | E/TFE | -80 °C to +170 °C | Blue (BU) | UL 94 V0 | <ul style="list-style-type: none"> Resistance to radioactivity UV-resistant, not moisture sensitive Good chemical resistance to: acids, bases, oxidizing agents | RoHS |
| Polyacetal | POM | -40 °C to +90 °C, (+110 °C, 500 h) | Natural (NA) | UL 94 HB | <ul style="list-style-type: none"> Limited brittleness sensitivity Flexible at low temperature Not moisture sensitive Robust on impacts | RoHS |
| Polyamide 11 | PA11 | -40 °C to +85 °C, (+105 °C, 500 h) | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Bio-plastic, derived from vegetable oil Strong impact resistance at low temperature Very low moisture absorption Weather-resistant Good chemical resistant | HF RoHS |
| Polyamide 12 | PA12 | -40 °C to +85 °C, (+105 °C, 500 h) | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Good chemical resistance to: acids, bases, oxidizing agents UV-resistant | HF RoHS |
| Polyamide 4.6 | PA46 | -40 °C to +150 °C (5000 h), +195 °C (500 h) | Natural (NA), Grey (GY) | UL 94 V2 | <ul style="list-style-type: none"> Resistance to high temperatures Very moisture sensitive Low smoke sensitiv | HF LFH RoHS |
| Polyamide 6 | PA6 | -40 °C to +80 °C | Black (BK) | UL 94 V2 | <ul style="list-style-type: none"> High yield strength | RoHS |
| Polyamide 6, high impact modified | PA6HIR | -40 °C to +80 °C | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Limited brittleness sensitivity Higher flexibility at low temperature | RoHS |
| Polyamide 6.6 | PA66 | -40 °C to +85 °C, (+105 °C, 500 h) | Black (BK), Natural (NA) | UL 94 V2 | <ul style="list-style-type: none"> High yield strength | HF RoHS |
| Polyamide 6.6, glass-fibre reinforced | PA66GF13, PA66GF15 | -40 °C to +105 °C | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Good resistance to: lubricants, vehicle fuel, salt water and a lot of solvent | HF RoHS |
| Polyamide 6.6, heat and UV stabilised | PA66HSW | -40 °C to +105 °C | Black (BK) | UL 94 V2 | <ul style="list-style-type: none"> High yield strength Modified elevated max. temperature UV-resistant | HF RoHS |
| Polyamide 6.6, heat stabilised | PA66HS | -40 °C to +105 °C | Black (BK), Natural (NA) | UL 94 V2 | <ul style="list-style-type: none"> High yield strength Modified elevated max. temperature | HF RoHS |
| Polyamide 6.6, high impact modified | PA66HIR | -40 °C to +80 °C, (+105 °C, 500 h) | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Limited brittleness sensitivity Higher flexibility at low temperature | RoHS |
| Polyamide 6.6, high impact modified, heat and UV stabilised | PA66HIRHSW | -40 °C to +110 °C | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Limited brittleness sensitivity Higher flexibility at low temperature Modified elevated max. temperature High yield strength, UV-resistant | RoHS |
| Polyamide 6.6, high impact modified, heat stabilised | PA66HIRHS | -40 °C to +105 °C | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Limited brittleness sensitivity Higher flexibility at low temperature Modified elevated max. temperature | RoHS |
| Polyamide 6.6, high impact modified, ScanBlack | PA66HIR(S) | -40 °C to +80 °C, (+105 °C, 500 h) | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Limited brittleness sensitivity Higher flexibility at low temperature | RoHS |
| Polyamide 6.6, UV-resistant | PA66W | -40 °C to +85 °C, (+105 °C, 500 h) | Black (BK) | UL 94 V2 | <ul style="list-style-type: none"> High yield strength UV-resistant | HF RoHS |

| MATERIAL | Material Shortcut | Operating Temperature | Colour** | Flammability | Material Properties* | Material Specifications |
|---|-------------------|---------------------------------------|-----------------------------|---------------------|--|--|
| Polyamide 6.6, with metal particles | PA66MP | -40 °C to +85 °C, (+105 °C, 500 h) | Blue (BU) | UL 94 HB | <ul style="list-style-type: none"> High yield strength Metal and X-Ray detectable | HF RoHS |
| Polyamide 6.6, with metal particles | PA66MP+ | -40 °C to +85 °C | Blue (BU) | not flame retardant | <ul style="list-style-type: none"> High yield strength Metal and x-ray detectable | HF RoHS |
| Polyamide 6.6 V0 | PA66V0 | -40 °C to +85 °C | White (WH) | UL 94 V0 | <ul style="list-style-type: none"> High yield strength Low smoke emission | HF LFH RoHS |
| Polyester | SP | -50 °C to +150 °C | Black (BK) | halogen free | <ul style="list-style-type: none"> UV-resistant Good chemical resistance to: most acids, alkalis and oils | HF LFH RoHS |
| Polyetheretherketone | PEEK | -55 °C to +240 °C | Beige (BGE) | UL 94 V0 | <ul style="list-style-type: none"> Resistance to radioactivity Not moisture sensitive Good chemical resistance to: acids, bases, oxidizing agents | HF LFH RoHS |
| Polyethylene | PE | -40 °C to +50 °C | Black (BK), Grey (GY) | UL 94 HB | <ul style="list-style-type: none"> Low moisture absorption Good chemical resistance to: most acids, alcohol and oils | HF RoHS |
| Polyolefin | PO | -40 °C to +90 °C | Black (BK) | UL 94 V0 | <ul style="list-style-type: none"> Low smoke emissions | HF LFH RoHS |
| Polypropylene | PP | -40 °C to +115 °C | Black (BK), Natural (NA) | UL 94 HB | <ul style="list-style-type: none"> Floats in water Moderate yield strength Good chemical resistance to: organic acids | HF RoHS |
| Polypropylene, Ethylene-Propylene- Dien-Terpolymere- rubber free of Nitrosamine | PP, EPDM | -20 °C to +95 °C | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> Good resistance to high temperatures Good chemical and abrasion resistance | HF RoHS |
| Polypropylene with metal particles | PPMP | -40 °C to +115 °C | Blue (BU) | UL 94 HB | <ul style="list-style-type: none"> Metal and X-Ray detectable Heat resistant Moderate yield strength Good chemical resistance | RoHS |
| Polypropylene with metal particles | PPMP+ | -40 °C to +85 °C | Blue (BU) | not flame retardant | <ul style="list-style-type: none"> High yield strength Metal and x-ray detectable | HF RoHS |
| Polyvinylchloride | PVC | -10 °C to +70 °C | Black (BK), Natural (NA) | UL 94 V0 | <ul style="list-style-type: none"> Low moisture absorption Good chemical resistance to: acids, ethanol and oil | RoHS |
| Stainless Steel | SS304, SS316 | -80 °C to +538 °C | Natural (NA) | non-burning | <ul style="list-style-type: none"> Corrosion resistant Antimagnetic Weather resistant Outstanding chemical resistance | HF LFH RoHS |
| Thermoplastic Polyurethane | TPU | -40 °C to +85 °C | Black (BK) | UL 94 HB | <ul style="list-style-type: none"> High elastic Good chemical resistance to: acids, bases and oxidizing agents | HF RoHS |

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton is also using equivalent E/TFE raw material from other suppliers. *These details are only rough guide values. They should not be regarded as a material specification and are no substitute for a suitability test. Please see our datasheets for further details.

**More colours on request.



= Minimum Loop Tensile Strength for Cable Ties (Newton)

HF = Halogenfree

LFH = Limited Fire Hazard

RoHS = Restriction of Hazardous Substances

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Tie Mounts](#) category:

Click to view products by [HellermannTyton](#) manufacturer:

Other Similar products are found below :

[3-350087-0](#) [CTB75X75BKA-C](#) [561-EZAB580T](#) [561-EZS375B40](#) [561-TA250125](#) [08443-0](#) [10035-0](#) [561-TA00600](#) [1689174-1](#) [08445-0](#)
[10351-0](#) [561-TA250125B](#) [20015-0](#) [10350-0](#) [10029-0](#) [08484-0](#) [08446-0](#) [08318-0](#) [PAM075NY-A-C](#) [MTH1-3](#) [10044](#) [151-01802](#) [151-11319](#)
[151-11819](#) [PLWP1SB-D](#) [PLWP1M-C](#) [PLWP2SA-D](#) [PLWP2SB-D](#) [PLWP2S-C](#) [PLWP1S-D](#) [PLWP1M-D](#) [TA1S8-C](#) [ABM3H-A-L](#) [ABM3H-](#)
[AT-T0](#) [EMS-A-C0](#) [EMSK3-1-3-0](#) [10079](#) [10030](#) [151-10930](#) [151-10920](#) [3590](#) [151-28320](#) [151-28349](#) [151-28530](#) [151-10914](#) [151-10904](#) [151-](#)
[10915](#) [151-10916](#) [151-10906](#) [115-06960](#)