


## Specification Sheet

Part Number: 156-00468

Edge Clip applies easily to plastic and metal sheets without the need for a mounting hole.

Edge Clip provides low insertion force and high extraction force ideal for assembly environments.

Two-piece assembly allows the mount to slide along the strap ensuring proper orientation.

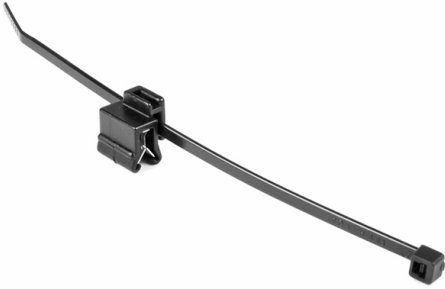

2-Piece Cable Tie & Edge Clip, 8.0" Long, EC5B, 1–3 mm Panel, 50lb, PA66UV/PA66HIRHSUV, Black, 100/pkg

**Article Number** 156-00468

**Type** T50REC5B

**Color** Black (BK)

**Quantity Per** bag

**Product Description** HellermannTyton's Two-Piece Edge Clip with Cable Tie Assemblies are designed specifically to route bundles by securing them to the edge of a plastic or metal sheet without the need for a mounting hole. The clip is easy to secure and the extraction force is high due to the integrated metal clamp that holds the edge clip in place.

**Short Description** 2-Piece Cable Tie & Edge Clip, 8.0" Long, EC5B, 1–3 mm Panel, 50lb, PA66UV/PA66HIRHSUV, Black, 100/pkg

<b>Global Part Name</b>	T50REC5B-PA66UV/PA66HIRHS-BK
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	225.0
<b>Length L (Imperial)</b>	8.0
<b>Length L (Metric)</b>	202.0
<b>Fixation Method</b>	EdgeClip, sideways, assembled, 2 piece
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Variant</b>	Inside Serrated
<b>Width W (Imperial)</b>	0.18
<b>Width W (Metric)</b>	4.6
<b>Bundle Diameter Min (Imperial)</b>	0.06
<b>Bundle Diameter Min (Metric)</b>	1.5
<b>Bundle Diameter Max (Imperial)</b>	1.97
<b>Bundle Diameter Max (Metric)</b>	50.0
<b>Thickness T (Imperial)</b>	0.05

<b>Thickness T (Metric)</b>	1.2
<b>Height H (Imperial)</b>	0.61
<b>Height H (Metric)</b>	15.5
<b>Panel Thickness Min (Imperial)</b>	0.04
<b>Panel Thickness Max (Imperial)</b>	0.12
<b>Panel Thickness Min (Metric)</b>	1.0
<b>Panel Thickness Max (Metric)</b>	3.0
<b>Material</b>	Polyamide 6.6 UV-stabilized (PA66UV) Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
<b>Material Shortcut</b>	PA66HIRHS PA66UV
<b>Material Cable Tie</b>	Polyamide 6.6 UV-stabilized (PA66UV)
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature</b>	-40°F to +221°F (-40°C to +105°C) -40°F to +257°F (-40°C to +125°C)
<b>ROHS Compliant</b>	Yes
<b>Package Quantity (Imperial)</b>	100

**Package Quantity (Metric)**

100

**Customs Number**

3926909988

© 2022 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Ties](#) category:*

*Click to view products by [HellermannTyton](#) manufacturer:*

Other Similar products are found below :

[65034-C](#) [65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ-3463](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK](#)  
[58" X 50YD](#) [SJ3571](#) [SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#)  
[06226](#) [08350-0](#) [08600-0](#) [08376-0](#) [10036-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-](#)  
[LOOP-BLACK-1](#) [SJ3572-2"x50yd-Black](#) [CF5625-000](#) [V03HK](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#)  
[65035-C](#) [770-1752](#) [SPNY-041-9](#) [SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#)