


Specification Sheet

Part Number: 156-01601

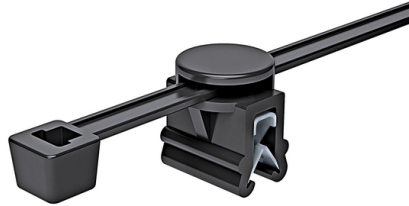

Edge Clip applies easily to plastic and metal sheets without the need for a mounting hole.

Edge Clip provides low insertion force and high extraction force ideal for assembly environments.

Cable tie is rotatable and inside serrated.

Article Number 156-01601

Type CBTO50R

Color Black (BK)

Quantity Per bag

Product Description HellermannTyton's Two-Piece Edge Clip with Cable Tie Assemblies are designed specifically to route bundles by securing them to the edge of a plastic or metal sheet without the need for a mounting hole. The clip is easy to secure and the extraction force is high due to the integrated metal clamp that holds the edge clip in place. The clips are available in 90° and 360° models for use with different types of cable tie. On the CBTO50R the bundle runs over the center of the clip and the cable tie is inside serrated.

Short Description Rotatable Cable Tie & Edge Clip, 8.0" Long, Inside Serrated, PA66HS/PA66HIRHSUV, Black, 500/bag

Global Part Name CBTO50R-PA66HS/PA66HIRHS-BK

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 225

Length L (Imperial) 8.0

Length L (Metric) 202

Fixation Method Edge Clips with tie

Identification Plate Position none

Releasable Closure No

Variant Inside Serrated

Width W (Imperial) 0.18

Width W (Metric) 4.6

Bundle Diameter Min (Imperial) 0.08

Bundle Diameter Min (Metric) 2.0

Bundle Diameter Max (Imperial) 1.9

Bundle Diameter Max (Metric) 47.0

Thickness T (Imperial) 0.05

| | |
|---------------------------------------|---|
| Thickness T (Metric) | 1.2 |
| Height H (Imperial) | 0.05 |
| Height H (Metric) | 1.2 |
| Cable Tie Width Max (Imperial) | 0.18 |
| Cable Tie Width Max (Metric) | 4.6 |
| Panel Thickness Min (Imperial) | 0.04 |
| Panel Thickness Max (Imperial) | 0.12 |
| Panel Thickness Min (Metric) | 1.0 |
| Panel Thickness Max (Metric) | 3.0 |
| Material | Polyamide 6.6 heat stabilized (PA66HS) Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) |
| Material Shortcut | PA66HIRHS PA66HS |
| Material Cable Tie | Polyamide 6.6 heat stabilized (PA66HS) |
| Flammability | UL 94 V-2 |
| Operating Temperature | -40°F to +221°F (-40°C to +105°C) |
| Reach Compliant (Article 33) | Yes |

| | |
|------------------------------------|------------|
| ROHS Compliant | Yes |
| Package Quantity (Imperial) | 500 |
| Package Quantity (Metric) | 500 |
| Customs Number | 3926909988 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [HellermannTyton](#) manufacturer:

Other Similar products are found below :

[65034-C](#) [65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#) [SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#) [06226](#) [08350-0](#) [08600-0](#) [08376-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#) [SJ3572-2"x50yd-Black](#) [CF5625-000](#) [V03HK](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#) [65035-C](#) [770-1752](#) [SPNY-041-9](#) [SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10620-0](#)