

### Metallic conduits with plastic coating and metallic overbraid

- PCSB Galvanised Steel Conduit, PVC Coating, Galvanised Steel Overbraid

Industrial environments where higher abrasion resistance or EMC screening are required.

#### Features and Benefits


- High compression, tensile and impact strength
- Very high abrasion resistance
- Very flexible
- Provides EMC screening




The HeloGuard PCSB galvanised steel conduit with a PVC coating galvanised steel overbraid offers high abrasion resistance and EMC screening.

**Stainless steel and tinned copper braiding is also available.**

<b>MATERIAL</b>	Galvanised Steel (GS), Polyvinylchloride (PVC)
<b>Operating Temperature</b>	-15 °C to +70 °C



Heloguard metallic conduit, plastic coating and metallic braid

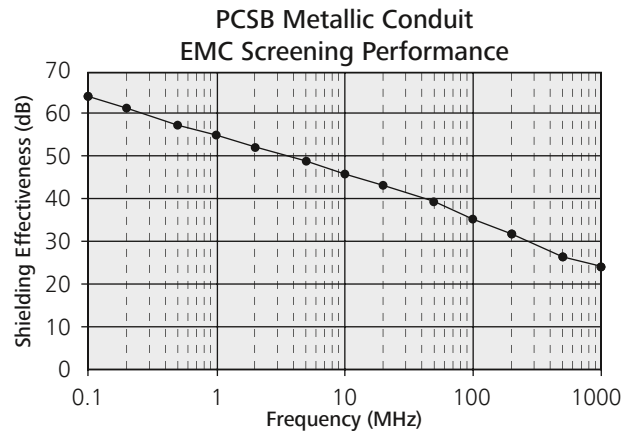

TYPE	Nominal Ø	Outside Ø (OD)	Inside Ø (ID)	Min. Bending Radius (R)	Weight (g/m)	Reel Length	Colour	Article-No.
PCSB12	12	15.2	10.2	30	252	25 m	Metal (ML)	166-33600
PCSB16	16	18.2	13.0	40	348	25 m	Metal (ML)	166-33601
PCSB20	20	22.7	16.9	45	530	25 m	Metal (ML)	166-33602
PCSB25	25	27.2	21.1	55	614	25 m	Metal (ML)	166-33603
PCSB32	32	35.2	28.1	70	832	25 m	Metal (ML)	166-33604
PCSB40	40	45.7	37.6	80	1,286	10 m	Metal (ML)	166-33605
PCSB50	50	57.7	48.4	90	1,736	10 m	Metal (ML)	166-33606

All dimensions in mm. Subject to technical changes.  
Other reel lengths available on request. Minimum Order Quantity (MOQ) may differ from package content.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Spiral Wraps, Sleeves, Tubing & Conduit](#) category:*

*Click to view products by [HellermannTyton](#) manufacturer:*

Other Similar products are found below :

[601203-000](#) [CTA-0053](#) [8426-11](#) [8429-9](#) [8445-7.5](#) [8450](#) [120-104-24](#) [120-113-16B](#) [120-116-1-1-09BE](#) [120-116-1-1-09BF](#) [120-116-1-1-09BP](#)  
[120-116-1-1-12BE](#) [120-116-1-1-12BP](#) [120-116-1-1-20BP](#) [120-116-1-1-32BE](#) [120-117-40](#) [120-123-06](#) [120-123-10](#) [120-123-14](#) [120-123-16](#)  
[120-125-12BL](#) [120-125-12R](#) [120-125-16](#) [120-125-16R](#) [120-125-16Y](#) [120-125-20R](#) [120-125-24Y](#) [120-125-28](#) [120-125-28R](#) [120-125-32](#)  
[120-125-32R](#) [120-125-40](#) [120-125-56](#) [120-126-09](#) [120-126-09BL](#) [120-126-12](#) [120-126-12BL](#) [120-126-14](#) [120-126-16](#) [120-126-16BL](#) [120-](#)  
[126-20](#) [120-126-20BL](#) [120-126-20R](#) [120-126-24](#) [120-126-28](#) [120-126-32](#) [120-126-40BL](#) [120-126-52](#) [120-126-52BL](#) [120-104-12](#)