



HelaGuard Accessories


- AFCSS Fixing Clip, Stainless Steel

The AFCSS P-clip is used to secure metallic conduits.



HelaGuard AFCSS Fixing Clip, Stainless Steel.

MATERIAL	Stainless Steel (SS316)
Operating Temperature	-100 °C to +400 °C

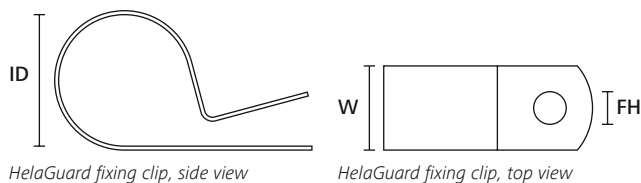

TYPE	Nominal Ø	Inside Ø (ID)	Width (W)	Hole Ø (FH)	Pack Cont.	Colour	Article-No.
AFCSS10	10	9.5	11.1	5.1	10 pcs.	Metal (ML)	166-50610
AFCSS12	12	13.0	11.1	5.1	10 pcs.	Metal (ML)	166-50611
AFCSS16	16	16.0	11.1	5.1	10 pcs.	Metal (ML)	166-50612
AFCSS20	20	20.5	11.1	5.1	10 pcs.	Metal (ML)	166-50613
AFCSS25	25	25.0	11.1	5.1	10 pcs.	Metal (ML)	166-50614
AFCSS32	32	32.0	11.1	5.1	10 pcs.	Metal (ML)	166-50615
AFCSS40	40	42.5	12.7	7.1	5 pcs.	Metal (ML)	166-50616
AFCSS50	50	53.0	12.7	7.1	5 pcs.	Metal (ML)	166-50617

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Conduit Fittings & Accessories](#) category:

Click to view products by [HellermannTyton](#) manufacturer:

Other Similar products are found below :

[790-3006](#) [790-3150](#) [RE42](#) [LT20090](#) [LTB15045](#) [LTB20045](#) [LTB3890](#) [CGE195](#) [790-3154](#) [790-3008](#) [790-3014](#) [790-3020](#) [790-3152](#) [790-3156](#) [790-3166](#) [790-3002](#) [790-3162](#) [C2016-P](#) [C2012-P](#) [561-87BG11BLK](#) [1.511.1601.50](#) [55502675](#) [2676](#) [302-TB](#) [655241-000](#) [C17](#) [262-420](#) [TMC165-BR](#) [RBDP-BLA-20D236U](#) [RBDP-BLA-30D346U](#) [SPL25/075/M](#) [CN21](#) [SRN21](#) [3405B](#) [4975](#) [VC12516](#) [RC156-0500](#) [DM0523-1/2A](#) [1035A](#) [DMS0250-1A](#) [DMS0313-1A](#) [1040A](#) [1050A](#) [R1/8A](#) [DMPC0490-1/2A](#) [DMPC0521-1/2A](#) [DMPC0552-1/2A](#) [1070A](#) [R1/2A](#) [E1-7/8B](#)