

Specification Sheet

Part Number: 166-90248

Spiral reinforced construction provides protection from crushing yet remains extremely flexible.


Lightweight, easy-to-use material reduces installation time and labor costs.

Material stands up to vibration and limited torsional movement without creation of stress points or cracks.

Smooth inside bore protects wires and eases insertion of wire bundles.

UV resistant; suitable for use in outdoor applications.

Outer surface wipes clean in wash-down environments.

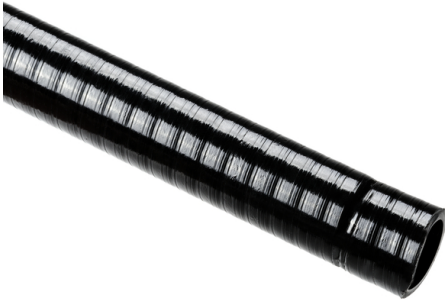

HelaGuard SR PVC Tubing, Smooth Bore, Smooth Cover, Std Wt, 0.50" Dia, Bk, 100 ft/Std. Reel

Article Number 166-90248

Type LPC0500

Color Black (BK)

Quantity Per reel

Product Description A lightweight, smooth tubing made of a spiral reinforced PVC material that provides high flexibility; well-suited for protecting wire and cable bundles in extremely tight spaces. UV resistant. Use with HelaGuard Metallic or Non Metallic Compression (PSR) Fittings for IP67 rating.

Short Description	HelaGuard SR PVC Tubing, Smooth Bore, Smooth Cover, Std Wt, 0.50" Dia, Bk, 100 ft/Std. Reel
Global Part Name	LPC0500-PVC-BK
Length L (Imperial)	100.0
Length L (Metric)	30.5
Inner Diameter D (Imperial)	0.63
Inner Diameter D (Metric)	16
Outside Diameter OD (Imperial)	0.83
Outside Diameter OD (Metric)	21.1
Nominal Diameter (Imperial)	0.5
Nominal Diameter (Metric)	20
Material	Polyvinylchloride (PVC)
Material Shortcut	PVC
Flammability	Self-extinguishing according to EN IEC 61386-1
Halogen Free	No

Operating Temperature +23°F to +158°F (-5°C to +70°C)

Reach Compliant (Article 33) Yes

ROHS Compliant Yes

Package Quantity (Imperial) 100

Package Quantity (Metric) 30.5

Customs Number 3926909988

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Spiral Wraps, Sleeves, Tubing & Conduit](#) category:

Click to view products by [HellermannTyton](#) manufacturer:

Other Similar products are found below :

[601203-000](#) [CTA-0053](#) [8426-11](#) [8429-9](#) [8445-7.5](#) [8450](#) [120-104-24](#) [120-113-16B](#) [120-116-1-1-09BE](#) [120-116-1-1-09BF](#) [120-116-1-1-09BP](#)
[120-116-1-1-12BE](#) [120-116-1-1-12BP](#) [120-116-1-1-20BP](#) [120-116-1-1-32BE](#) [120-117-40](#) [120-123-06](#) [120-123-10](#) [120-123-14](#) [120-123-16](#)
[120-125-12BL](#) [120-125-12R](#) [120-125-16](#) [120-125-16R](#) [120-125-16Y](#) [120-125-20R](#) [120-125-24Y](#) [120-125-28](#) [120-125-28R](#) [120-125-32](#)
[120-125-32R](#) [120-125-40](#) [120-125-56](#) [120-126-09](#) [120-126-09BL](#) [120-126-12](#) [120-126-12BL](#) [120-126-14](#) [120-126-16](#) [120-126-16BL](#) [120-](#)
[126-20](#) [120-126-20BL](#) [120-126-20R](#) [120-126-24](#) [120-126-28](#) [120-126-32](#) [120-126-40BL](#) [120-126-52](#) [120-126-52BL](#) [120-104-12](#)