



Heat shrinkable cable repair sleeves

RMS

RMS wrap-around sleeves are closed with a steel channel. The sleeve is adhesive lined and will effectively seal the cable after shrinkage. RMS sleeves provide fast, watertight and reliable insulation.

Features and benefits

- Fast, moisture proof and permanent repair of cable jackets
- Only 6 sizes for a wide range of cable diameters: from 15 mm up to 160 mm
- Available in 4 standard lengths and also available in custom lengths available on request
- Each RMS kit is ready for use and comes with instruction sheet, abrasive strip and cleaning sachet
- The metal closure is made of 316 stainless steel for high overall corrosion resistance
- Weather resistant and halogen free
- TCP (thermo chromatic paint) spots indicate the sleeve has been sufficiently heated



Application video: RMS

MATERIAL	Polyolefin, chemically cross linked (PO-X)
Shrink Ratio	up to 4.5:1
Operating Temperature	-40 °C to +120 °C
Min. Shrink Temperature	+110 °C
Softening Point Adhesive	+105 °C
Longitudinal change after shrinkage	-10 % max.
Dielectric Strength	30 kV/mm
Flammability	not flame retarded



HF ✓


RoHS ✓



RMS wrap-around sleeves for rapid and secure cable repair.



RMS: Repair sleeve, steel closure, abrasive strip, cleaning sachet, instruction sheet.

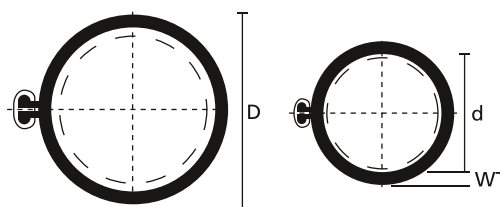

Cable Repair Sleeve RMS with adhesive

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Suitable for Cable Ø from/to	Length (L)	Colour	Article-No.
RMS 43-10	43.0	10.0	2.30	15 - 35	250.0	Black (BK)	450-20000
	43.0	10.0	2.30	15 - 35	500.0	Black (BK)	450-20001
	43.0	10.0	2.30	15 - 35	750.0	Black (BK)	450-20004
	43.0	10.0	2.30	15 - 35	1,000.0	Black (BK)	450-20002
RMS 52-15	52.0	15.0	2.30	20 - 45	250.0	Black (BK)	450-20010
	52.0	15.0	2.30	20 - 45	500.0	Black (BK)	450-20011
	52.0	15.0	2.30	20 - 45	750.0	Black (BK)	450-20014
	52.0	15.0	2.30	20 - 45	1,000.0	Black (BK)	450-20012
RMS 76-22	76.0	22.0	2.50	28 - 65	500.0	Black (BK)	450-20021
	76.0	22.0	2.50	28 - 65	750.0	Black (BK)	450-20024
	76.0	22.0	2.50	28 - 65	1,000.0	Black (BK)	450-20022
RMS 100-30	100.0	30.0	2.54	35 - 85	500.0	Black (BK)	450-20030
	100.0	30.0	2.54	35 - 85	1,000.0	Black (BK)	450-20031
RMS 139-38	139.0	38.0	2.77	45 - 120	1,000.0	Black (BK)	450-20041
RMS 185-55	185.0	55.0	2.74	65 - 160	1,000.0	Black (BK)	450-20050

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [HellermannTyton](#) manufacturer:

Other Similar products are found below :

[5685710001](#) [CR9960-000](#) [5734012004](#) [607381P039](#) [611112-000](#) [6284592002](#) [CX4711-000](#) [CZ1420-000](#) [D-306-38](#) [770-006S302](#) [770-010Y106W1](#) [770-018S103](#) [770-018S202W1](#) [770-018S205W1](#) [770-020S704W1](#) [770-020S705](#) [MFP-1/4"-Clear](#) [MFP-3/64"-Clear](#) [790-3012](#) [MHHT-4-15K2-G-104](#) [8003012003](#) [MIL-LT-1-1/2-4-SP](#) [MIL-LT-1-1/2-9-STK](#) [MIL-LT-1/2-2-STK](#) [MIL-LT-3-0-SP](#) [MIL-LT-3/32-0-SP](#) [MIL-LT-3/32-6-SP](#) [MIL-LT-3/4-4-STK](#) [MIL-LT-3/4-6-SP](#) [839602-000](#) [8423-6](#) [FP301-116-48"-Clear](#) [FP301-12-6"-Clear](#) [FP301-1/4-48"-White-Hdr](#) [FP301-18-48"-Black-Hdr](#) [FP301-1/8-6"-Black](#) [FP301-18-6"-Black-Bulk](#) [FP301-316-48"-Blue-Hdr](#) [FP301-34-48"-Green-Hdr](#) [912229N002](#) [R280637030](#) [HDCW-5515-1000](#) [HDT-0300-48A-BLACK](#) [HDT-0400-48A-Black](#) [HDT-0800-48A-RED](#) [HDT1100-48A-BLK](#) [HDT1500-48A-BLK](#) [HDT-2000-48A-Black](#) [RHW-70/20-1200/ADH-0](#) [DWP-125-0.450-4-55MM-CS879](#)