




Shrinkable markers "Continuous Tube", thermal transfer

TULT – 3:1 Military and Electronics

TULT is a UL recognized 3:1 heat shrink marker material supplied as a continuous tube and printable on both sides. TULT's polyolefin compound has good mechanical strength and resistance to organic solvents and chemicals. The surface of the tubing has been especially prepared so that print performance is excellent at all times. HellermannTyton's printer range allow users to create a high quality print. In addition it is possible to either perforate the tubing at pre-determined lengths or fully sever the markers.

Features and benefits

- Shrink ratio 3:1
- Available in black, blue, red, white and yellow
- Cable range from 39 mm to 1 mm
- Good mechanical strength and resistance to organic solvents and chemicals
- Highly flexible
- Delivery in convenient storage boxes

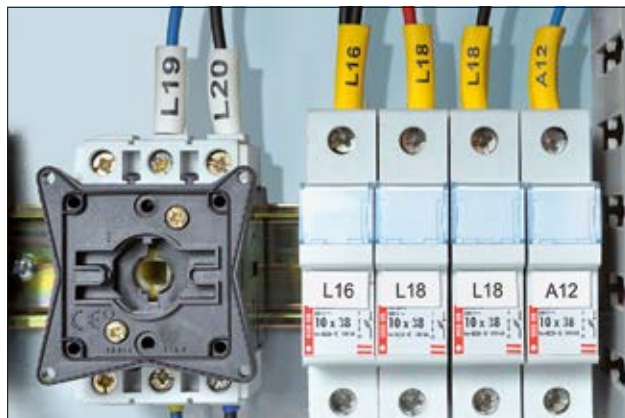

TULT – 5 colours of UL recognised printable tube to cover a wide range of diameters.

| | |
|---------------------------------|----------------------------------|
| MATERIAL | Polyolefin, cross-linked (PO-X) |
| Operating Temperature | -55 °C to +135 °C |
| Min. Shrink Temperature | +90 °C |
| Shrink Ratio | 3:1 |
| Recommended Ribbon Type | TTRC+, TTDTHOUT, TTRW, TT822OUT8 |
| Thermal Transfer Printer | TT430, TT4030, TrakMark DS |

RoHS



For size matrix please refer to page 439.

| TYPE | Supplied Ø D min. | Recov. Ø d max. | Wall (WT) | Pack Cont. | Colour | Article-No. |
|---------------|----------------------|--------------------|--------------|---------------|-------------|-------------|
| TULT3-1BK | 3.0 | 1.0 | 0.60 | 176 m | Black (BK) | 553-40352 |
| TULT3-1BU | 3.0 | 1.0 | 0.60 | 176 m | Blue (BU) | 553-40353 |
| TULT3-1RD | 3.0 | 1.0 | 0.60 | 176 m | Red (RD) | 553-40354 |
| TULT3-1WH | 3.0 | 1.0 | 0.60 | 176 m | White (WH) | 553-40351 |
| TULT3-1YE | 3.0 | 1.0 | 0.60 | 176 m | Yellow (YE) | 553-40350 |
| TULT4.8-1.6BK | 4.8 | 1.6 | 0.65 | 110 m | Black (BK) | 553-40452 |
| TULT4.8-1.6BU | 4.8 | 1.6 | 0.65 | 110 m | Blue (BU) | 553-40453 |
| TULT4.8-1.6RD | 4.8 | 1.6 | 0.65 | 110 m | Red (RD) | 553-40454 |
| TULT4.8-1.6WH | 4.8 | 1.6 | 0.65 | 110 m | White (WH) | 553-40451 |
| TULT4.8-1.6YE | 4.8 | 1.6 | 0.65 | 110 m | Yellow (YE) | 553-40450 |
| TULT6-2BK | 6.0 | 2.0 | 0.70 | 110 m | Black (BK) | 553-40652 |
| TULT6-2BU | 6.0 | 2.0 | 0.70 | 110 m | Blue (BU) | 553-40653 |
| TULT6-2RD | 6.0 | 2.0 | 0.70 | 110 m | Red (RD) | 553-40654 |
| TULT6-2WH | 6.0 | 2.0 | 0.70 | 110 m | White (WH) | 553-40651 |
| TULT6-2YE | 6.0 | 2.0 | 0.70 | 110 m | Yellow (YE) | 553-40650 |
| TULT9-3BK | 9.0 | 3.0 | 0.80 | 72 m | Black (BK) | 553-40952 |

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content. More colours on request.



For product specific approvals and specifications please refer to the Appendix.

Shrinkable markers "Continuous Tube", thermal transfer

TULT – 3:1 Military and Electronics



| TYPE | Supplied Ø D min. | Recov. Ø d max. | Wall (WT) | Pack Cont. | Colour | Article-No. |
|-------------|----------------------|--------------------|--------------|---------------|-------------|-------------|
| TULT9-3BU | 9.0 | 3.0 | 0.80 | 72 m | Blue (BU) | 553-40953 |
| TULT9-3RD | 9.0 | 3.0 | 0.80 | 72 m | Red (RD) | 553-40954 |
| TULT9-3WH | 9.0 | 3.0 | 0.80 | 72 m | White (WH) | 553-40951 |
| TULT9-3YE | 9.0 | 3.0 | 0.80 | 72 m | Yellow (YE) | 553-40950 |
| TULT12-4BK | 12.0 | 4.0 | 0.85 | 54 m | Black (BK) | 553-41252 |
| TULT12-4BU | 12.0 | 4.0 | 0.85 | 54 m | Blue (BU) | 553-41253 |
| TULT12-4RD | 12.0 | 4.0 | 0.85 | 54 m | Red (RD) | 553-41254 |
| TULT12-4WH | 12.0 | 4.0 | 0.85 | 54 m | White (WH) | 553-41251 |
| TULT12-4YE | 12.0 | 4.0 | 0.85 | 54 m | Yellow (YE) | 553-41250 |
| TULT18-6BK | 18.0 | 6.0 | 1.00 | 26 m | Black (BK) | 553-41852 |
| TULT18-6BU | 18.0 | 6.0 | 1.00 | 26 m | Blue (BU) | 553-41853 |
| TULT18-6RD | 18.0 | 6.0 | 1.00 | 26 m | Red (RD) | 553-41854 |
| TULT18-6WH | 18.0 | 6.0 | 1.00 | 26 m | White (WH) | 553-41851 |
| TULT18-6YE | 18.0 | 6.0 | 1.00 | 26 m | Yellow (YE) | 553-41850 |
| TULT24-8BK | 24.0 | 8.0 | 1.20 | 26 m | Black (BK) | 553-42452 |
| TULT24-8BU | 24.0 | 8.0 | 1.20 | 26 m | Blue (BU) | 553-42453 |
| TULT24-8RD | 24.0 | 8.0 | 1.20 | 26 m | Red (RD) | 553-42454 |
| TULT24-8WH | 24.0 | 8.0 | 1.20 | 26 m | White (WH) | 553-42451 |
| TULT24-8YE | 24.0 | 8.0 | 1.20 | 26 m | Yellow (YE) | 553-42450 |
| TULT39-13BK | 39.0 | 13.0 | 1.25 | 10 m | Black (BK) | 553-43952 |
| TULT39-13BU | 39.0 | 13.0 | 1.25 | 10 m | Blue (BU) | 553-43953 |
| TULT39-13RD | 39.0 | 13.0 | 1.25 | 10 m | Red (RD) | 553-43954 |
| TULT39-13WH | 39.0 | 13.0 | 1.25 | 10 m | White (WH) | 553-43951 |
| TULT39-13YE | 39.0 | 13.0 | 1.25 | 10 m | Yellow (YE) | 553-43950 |

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content. More colours on request.



For product specific approvals and specifications please refer to the Appendix.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Labels & Markers](#) category:

Click to view products by [HellermannTyton](#) manufacturer:

Other Similar products are found below :

[89078GBEST](#) [PCL025-4](#) [5761-2SF](#) [58400](#) [M1.040.0000.6](#) [CRS-CM5M](#) [CRS-M18M](#) [CS1836-000](#) [CS8626-000](#) [CU6337-000](#) [CU6342-000](#)
[CU6343-000](#) [CWD01-0](#) [CWD012-0](#) [CWD012-7](#) [CWD015-3](#) [CWD015-7](#) [CWD02-0](#) [CWD02-3](#) [CWD02-4](#) [CWD02-6](#) [CWD02-8](#) [CWD02-A](#)
[CWD02-D](#) [CWD02-H](#) [CWD02-K](#) [CWD02-L](#) [CWD02-M](#) [CWD02-P](#) [CWD02-Q](#) [CWD02-R](#) [CWD02-U](#) [CWD02-W](#) [CWD02-Y](#) [CWD03-+](#)
[CWD03-0](#) [CWD03-P](#) [CWD06-0](#) [CWD06-8](#) [CWD06-9](#) [CWD06-L](#) [CWD06-N](#) [CWD09-0](#) [CWD09-5](#) [CWD09-7](#) [6806810001](#) [CZ2857-000](#)
[6V1J0](#) [7-1768041-1](#) [739253-000](#)