



Industrial Ethernet

PROFInet Type A fixed installed + robust

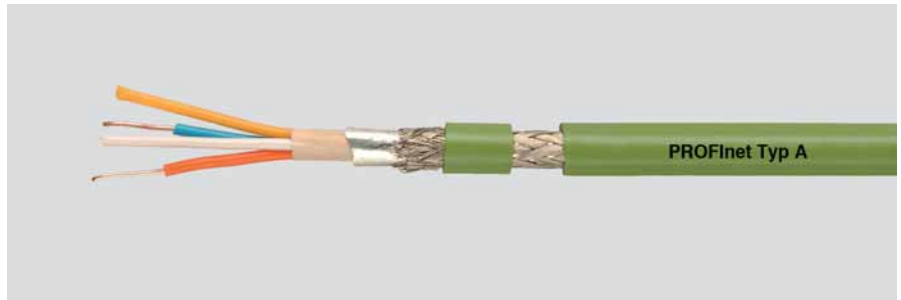

PVC + PUR



Type Cable structure

Inner conductor diameter:
Core insulation:
Core colours:
Stranding element:
Separator:
Inner sheath material:
Shielding 1:
Total shielding:
Outer sheath material:
Cable external diameter:
Outer sheath colour:

Fixed installation, indoor 2x2x0.64 mm

Copper, bare (AWG 22/1)
PE
wh, ye, bu, og
Star quad
Polyester foil over stranded bundle
PVC
Al-Foil
Cu braid, tinned
PVC
app. 6,5 mm ± 0,2 mm
Green similar to RAL 6018

Industrial Area 2x2x0.64 mm

Copper, bare (AWG 22/1)
PE
wh, ye, bu, og
Star quad
Polyester foil over stranded bundle
PVC
Al-Foil
Cu braid, tinned
PUR
app. 6,5 mm ± 0,2 mm
Green similar to RAL 6018

Electrical data

Characteristic impedance:
Conductor resistance, max.:
Insulation resistance, min.:
Loop resistance:
Mutual capacitance:
Test voltage:

100 Ohm ± 15 Ohm at 1 to 100 MHz
57,5 Ohm/km
5 GOhm x km
115 Ohm/km max.
48 nF/km nom.
2 kV

100 Ohm ± 15 Ohm at 1 to 100 MHz
62,5 Ohm/km
0,5 GOhm x km
115 Ohm/km max.
50 nF/km nom.
2 kV

Typical values

	(MHz)	10	16	62,5	100
Attenuation	(dB/100m)	5,2	6,9	15,0	19,5
Next	(db)	70,0	65,0	55,0	50,0
ACR	(db)	64,8	58,1	40,0	30,5

Technical data

Weight: app. 67 kg/km
bending radius, repeated: 65 mm
Operating temperature range min.: -40°C
Operating temperature range max.: +80°C
Caloric load, approx. value: 0,34 MJ/m
Copper weight: 32,00 kg/km

app. 64 kg/km
65 mm
-40°C
+70°C
0,91 MJ/m
32,00 kg/km

Norms

Applicable standards:

PROFInet Guideline + IEC 61158-2
Acc. to ISO/IEC 11801
Acc. to EN 50173
Category 5e
Flame-retardant acc. to IEC 60332-3
CMG 75°C or PLTC or AWM 21694 600V
CSA FT 4

PROFInet Guideline + IEC 61158-2
Acc. to ISO/IEC 11801
Acc. to EN 50173

Category 5e
Flame-retardant acc. to IEC 60332-1-2
-
-

UL Style:

CSA standard:

Application

HELUKAT® PROFInet Type A Category 5e for fixed installation in industrial networks, rugged. It guarantees excellent transmission characteristics and may be used even under the harshest conditions. The cable listed here corresponds to PROFInet Type A; this means the version with PVC sheath is designed for normal fixed installations and the version with PUR sheath is for difficult fixed installations in harsh industrial environments.

Part no.

800653, PROFInet type A (SK)

801194, PROFInet type A (SK)

Dimensions and specifications may be changed without prior notice.

Ideal accessory:

RJ45 copper connector
805401 + 805402
chapter 4, page 294



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)