


# BUS Cables

A-BUS EPDM

 **HELUKABEL®**

EPDM

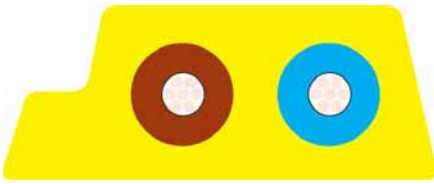

## Type Cable structure

Inner conductor:  
Core insulation:  
Core colours:  
Separator:  
Shielding 1:  
Total shielding:  
Outer sheath material:  
Outer sheath colour:

## Actuator Sensor Interface 2x1.5 mm<sup>2</sup>

Copper, tinned  
Rubber compound  
bu, bn  
-  
-  
-  
EPDM  
Yellow similar to RAL 1023

## Actuator Sensor Interface 2x1.5 mm<sup>2</sup>

Copper, tinned  
Rubber compound  
bu, bn  
-  
-  
-  
EPDM  
Black similar to RAL 9005

## Electrical data

Conductor resistance, max.:  
Insulation resistance, min.:  
Loop resistance:  
Nominal voltage:  
Test voltage:

13,7 Ohm/km  
1 GOhm x km  
27,4 Ohm/km max.  
32 V  
1 kV at 15 min.

13,7 Ohm/km  
1 GOhm x km  
27,4 Ohm/km max.  
48 V  
1 kV at 15 min.

## Technical data

Weight:  
bending radius, repeated:  
Operating temperature range min.:  
Operating temperature range max.:  
Caloric load, approx. value:  
Copper weight:

app. 70 kg/km  
30 mm  
-40°C  
+85°C  
0,975 MJ/m  
31,00 kg/km

app. 70 kg/km  
30 mm  
-40°C  
+85°C  
0,975 MJ/m  
31,00 kg/km

## Norms

Applicable standards:  
ASI standard  
Halogen-free acc. to 60754-1

ASI standard  
Halogen-free acc. to 60754-1

## Application

HELUKABEL® A-Bus EPDM Rubber for normal use in an AS-I system. Applications include wet/dry areas where the properties of a rubber jacket are desired. In addition, this material offers benefits such as low compression forces needed when contacting and the best sealing against the AS-I module.

## Part no.

**80824**, A-BUS EPDM

**80825**, A-BUS EPDM

Dimensions and specifications may be changed without prior notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [Helukabel](#) manufacturer:*

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)  
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-0062-20-9/5-9](#)  
[CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-U1000](#)  
[CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#)  
[CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#) [768146-000](#) [773159-000](#) [7934A-BLK-](#)  
[1000](#) [8125-CHR-100](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#)  
[83006-DK-GRN-100](#) [83008-WHT-1000](#) [83009-BLK-100](#) [83009-VIO-100](#)