



BUS Cables

Profibus SK fixed installed FRNC + Robust

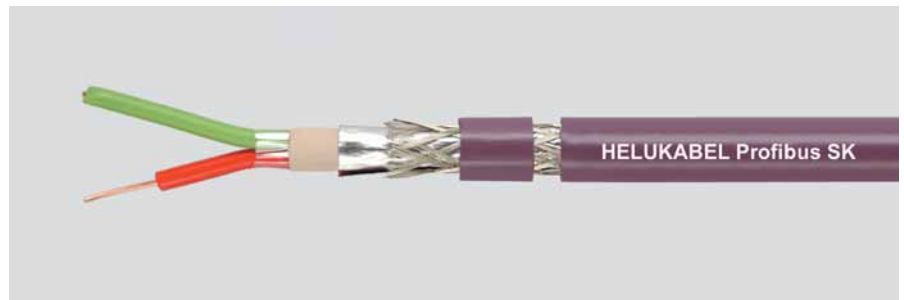

FRNC + PUR



Type

Cable structure

Inner conductor diameter:
Core insulation:
Core colours:
Stranding element:
Separator:
Inner sheath material:
Shielding 1:
Total shielding:
Outer sheath material:
Cable external diameter:
Outer sheath colour:

Fixed installation, indoor

1x2x0.64 mm

Copper, bare (AWG 22/1)
Foam-skin-PE
rd, gn
Double core
Polyester foil over stranded bundle
FRNC
Al-Foil
Cu braid, tinned
FRNC
app. 8,0 mm ± 0,4 mm
Violet similar to RAL 4001

Industrial Area

1x2x0.64 mm

Copper, bare (AWG 22/1)
Foam-skin-PE
rd, gn
Double core
Polyester foil over stranded bundle
FRNC
Al-Foil
Cu braid, tinned
PUR
app. 8,0 mm ± 0,4 mm
Violet similar to RAL 4001

Electrical data

Characteristic impedance:
Conductor resistance, max.:
Insulation resistance, min.:
Loop resistance:
Mutual capacitance:
Test voltage:
Attenuation:

150 Ohm ± 10 %
55 Ohm/km
1 GOhm x km
110 Ohm/km max.
35 nF/km nom.
1,5 kV
9,6 kHz < 2,5 dB/km
38,4 kHz < 4,0 dB/km
4 MHz < 22,0 dB/km
16 MHz < 42,0 dB/km

150 Ohm ± 10 %
55 Ohm/km
1 GOhm x km
110 Ohm/km max.
35 nF/km nom.
1,5 kV
9,6 kHz < 2,5 dB/km
38,4 kHz < 4,0 dB/km
4 MHz < 22,0 dB/km
16 MHz < 42,0 dB/km

Technical data

Weight:
bending radius, repeated:
Operating temperature range min.:
Operating temperature range max.:
Caloric load, approx. value:
Copper weight:

app. 73 kg/km
160 mm
-25°C
+70°C
1,203 MJ/m
24,00 kg/km

app. 71 kg/km
120 mm
-40°C
+70°C
1,574 MJ/m
24,00 kg/km

Norms

Applicable standards:

Profibus acc. to DIN 19245 T3 and EN50170
Halogen-free acc. to 60754-1
Flame-retardant acc. IEC 60332-2-1
CM 750C (shielded)

Profibus acc. to DIN 19245 T3 and EN50170
Halogen-free acc. to 60754-1
Flame-retardant acc. to IEC 60332-1-2
AWM Style 20236 AWM I/II A/B 80°C 30V
FT1
CSA FT1

UL Style:

CSA standard:

Application

HELUKABEL® Profibus SK FRNC + Robust has a special structure for processing with the Fast Connect Stripping Tool from Siemens. The FRNC version is used to satisfy halogen-free and flame-retardant requirements in buildings. The Robust version is used in harsh industrial environments and offers excellent resistance to mineral oils, greases and cooling lubricants.

Part no.

81501, Profibus SK

81905, Profibus SK

Dimensions and specifications may be changed without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-0062-20-9/5-9](#)
[CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-U1000](#)
[CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#)
[CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#) [768146-000](#) [773159-000](#) [7934A-BLK-](#)
[1000](#) [8125-CHR-100](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#)
[83006-DK-GRN-100](#) [83008-WHT-1000](#) [83009-BLK-100](#) [83009-VIO-100](#)