



# BUS Cables

Profibus SK fixed installed Indoor + Outdoor

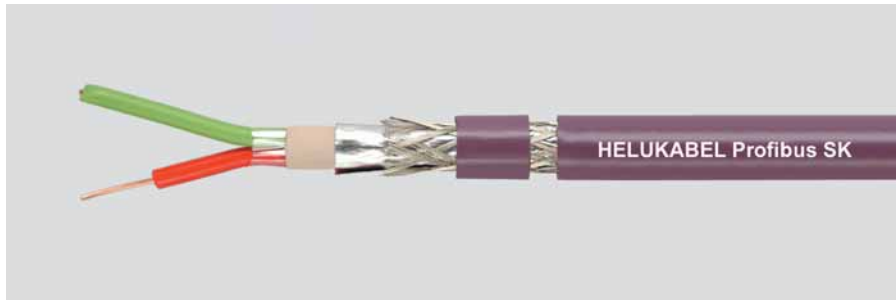

PVC + PE



## Type

### Cable structure

Inner conductor diameter:  
Core insulation:  
Core colours:  
Stranding element:  
Separator:  
Inner sheath material:  
Shielding 1:  
Total shielding:  
Outer sheath material:  
Cable external diameter:  
Outer sheath colour:

### Fixed installation, indoor 1x2x0.64 mm

Copper, bare (AWG 22/1)  
Foam-skin-PE  
rd, gn  
Double core  
Polyester foil over stranded bundle  
PVC  
Al-Foil  
Cu braid, tinned  
PVC  
app. 8,0 mm ± 0,4 mm  
Violet similar to RAL 4001

### Fixed installation, outdoor 1x2x0.64 mm

Copper, bare (AWG 22/1)  
Foam-skin-PE  
rd, gn  
Double core  
Polyester foil over stranded bundle  
PVC  
Al-Foil  
Cu braid, tinned  
PE  
app. 8,0 mm ± 0,4 mm  
Black similar to RAL 9005

## Electrical data

Characteristic impedance:  
Conductor resistance, max.:  
Insulation resistance, min.:  
Loop resistance:  
Mutual capacitance:  
Test voltage:  
Attenuation:

150 Ohm ± 10 %  
55 Ohm/km  
1 GOhm x km  
110 Ohm/km max.  
35 nF/km nom.  
1,5 kV  
9,6 kHz < 2,5 dB/km  
38,4 kHz < 4,0 dB/km  
4,0 MHz < 22,0 dB/km  
16,0 MHz < 42,0 dB/km

150 Ohm ± 10 %  
55 Ohm/km  
1 GOhm x km  
110 Ohm/km max.  
35 nF/km nom.  
1,5 kV  
9,6 kHz < 2,5 dB/km  
38,4 kHz < 4,0 dB/km  
4 MHz < 22,0 dB/km  
16 MHz < 42,0 dB/km

## Technical data

Weight:  
bending radius, repeated:  
Operating temperature range min.:  
Operating temperature range max.:  
Caloric load, approx. value:  
Copper weight:

app. 79 kg/km  
120 mm  
-40°C  
+80°C  
1,068 MJ/m  
24,00 kg/km

app. 65 kg/km  
120 mm  
-20°C  
+70°C  
1,451 MJ/m  
24,00 kg/km

## Norms

Applicable standards:

Profibus acc. to DIN 19245 T3 and EN50170  
Flame-retardant acc. to IEC 60332-3  
CMG 75°C or CL3 or AWM 21694 600V  
CSA FT 4

Profibus acc. to DIN 19245 T3 and EN50170

UL Style:

CSA standard:

-

-

## Application

HELUKABEL® Profibus SK Indoor + Outdoor have a special structure for processing with the Fast Connect Stripping Tool from Siemens. The indoor version is used for normal requirements in fixed installation applications in equipment; the Outdoor version is used in open-air applications, i.e. can withstand wind, weather and sun (not for burial directly in the ground).

## Part no.

**81903**, Profibus SK

**81904**, Profibus SK

Dimensions and specifications may be changed without prior notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [Helukabel](#) manufacturer:*

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)  
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-0062-20-9/5-9](#)  
[CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-U1000](#)  
[CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#)  
[CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#) [768146-000](#) [773159-000](#) [7934A-BLK-](#)  
[1000](#) [8125-CHR-100](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#)  
[83006-DK-GRN-100](#) [83008-WHT-1000](#) [83009-BLK-100](#) [83009-VIO-100](#)