


BUS Cables

A-BUS PUR, UL/CSA

 **HELUKABEL®**

PUR

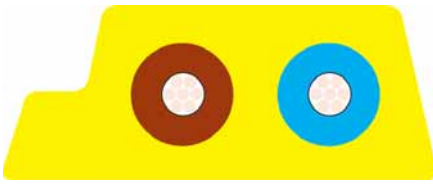

Type Cable structure

Inner conductor:
Core insulation:
Core colours:
Separator:
Shielding 1:
Total shielding:
Outer sheath material:
Outer sheath colour:

Actuator Sensor Interface 2x1.5 mm²

Copper, tinned
PO
bu, bn
-
-
-
PUR
Yellow similar to RAL 1023

Actuator Sensor Interface 2x1.5 mm²

Copper, tinned
PO
bu, bn
-
-
-
PUR
Black similar to RAL 9005

Electrical data

Conductor resistance, max.:
Insulation resistance, min.:
Loop resistance:
Nominal voltage:
Test voltage:

13,7 Ohm/km
1 GOhm x km
27,4 Ohm/km max.
32 V
1 kV at 15 min.

13,7 Ohm/km
1 GOhm x km
27,4 Ohm/km max.
48 V
1 kV at 15 min.

Technical data

Weight:
bending radius, repeated:
Operating temperature range min.:
Operating temperature range max.:
Caloric load, approx. value:
Copper weight:

app. 64 kg/km
30 mm
-40°C
+80°C
0,965 MJ/m
31,00 kg/km

app. 64 kg/km
30 mm
-40°C
+80°C
0,965 MJ/m
31,00 kg/km

Norms

Applicable standards:

ASI standard
Halogen-free acc. to 60754-1
Flame-retardant acc. to IEC 60332-1-2
AWM Style 20549
CSA FT2

ASI standard
Halogen-free acc. to 60754-1
Flame-retardant acc. to IEC 60332-1-2
AWM Style 20549
CSA FT2

Application

HELUKABEL® A-Bus PUR is ideal for use in wet/dry areas thanks to its outstanding characteristics when exposed to common coolants/lubricants. This version can also be used in cable carriers (special installation conditions must be observed: place wide cable side on inside radius, use partitions and install flat/round cables separately). These types are approved for use in the American market (UL 1581, FT2) thanks to use of special materials.

Part no.

82434, A-BUS PUR

82822, A-BUS PUR

Dimensions and specifications may be changed without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-0062-20-9/5-9](#)
[CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-U1000](#)
[CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#)
[CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#) [768146-000](#) [773159-000](#) [7934A-BLK-](#)
[1000](#) [8125-CHR-100](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#)
[83006-DK-GRN-100](#) [83008-WHT-1000](#) [83009-BLK-100](#) [83009-VIO-100](#)