
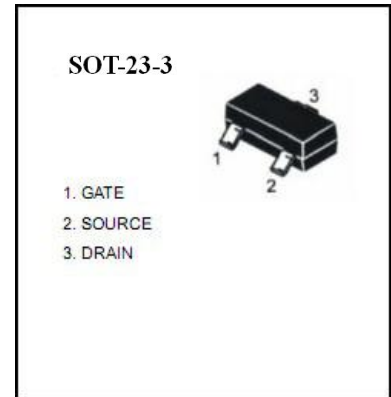


## SOT-23-3 Plastic-Encapsulate Transistors

### HX2300 MOSFET(N-Channel)

#### FEATURES

TrenchFET Power MOSFET  
 Load Switch for Portable Devices  
 DC/DC Converter



MARKING: 00A8C

#### MAXIMUM RATINGS (TA=25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V <sub>DS</sub>	Drain-Source voltage	20	V
V <sub>GS</sub>	Gate-Source voltage	±8	V
I <sub>D</sub>	Drain current	3.6	A
P <sub>D</sub>	Power Dissipation	1	W
T <sub>j</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-55-150	°C

#### ELECTRICAL CHARACTERISTICS (T<sub>amb</sub>=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250uA	20			V
Gate-Threshold Voltage	V <sub>th(GS)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250 uA	0.5	0.75	1.2	V
Gate-body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> =0V, V <sub>GS</sub> =±10V			±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =20V, V <sub>GS</sub> =0V			1	uA
Drain-Source On-Resistance	r <sub>DSON</sub>	V <sub>GS</sub> =2.5V, I <sub>D</sub> =3A		42	70	mΩ
		V <sub>GS</sub> =4.5V, I <sub>D</sub> =3.6A		38	52	mΩ
Forward Trans conductance	g <sub>fs</sub>	V <sub>DS</sub> =5V, I <sub>D</sub> =3A		9		S
Dynamic Characteristics						
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =10V, V <sub>GS</sub> =0V, f=1MHz		300		pF
Output Capacitance	C <sub>oss</sub>			120		
Reverse Transfer Capacitance	C <sub>rss</sub>			80		
Switching Capacitance						
Turn-on Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> =10V, I <sub>D</sub> =3.6A, V <sub>GS</sub> =4.5V R <sub>GEN</sub> =6Ω		10	15	nS
Turn-on Rise Time	t <sub>r</sub>			50	80	nS
Turn-off Delay Time	t <sub>d(off)</sub>			17	60	nS
Turn-off Fall Time	t <sub>f</sub>			10	25	nS
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> =10V, I <sub>D</sub> =3.6A, V <sub>GS</sub> =4.5V,		4.0	10	nC
Gate-Source Charge	Q <sub>gs</sub>			0.65		nC
Gate-Drain Charge	Q <sub>gd</sub>			1.5		nC
Drain-Source Diode Characteristics						
Diode Forward Voltage	V <sub>SD</sub>	V <sub>GS</sub> =0V, I <sub>S</sub> =3A		0.75	1.2	V
Diode Forward Current	I <sub>S</sub>				3.0	A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [hengjiaxing](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [2SK2464-TL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#)  
[SSM6J414TU,LF\(T](#) [751625C](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)  
[FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#)  
[C3M0021120D](#) [DMN13M9UCA6-7](#) [BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IPS60R1K0PFD7SAKMA1](#)  
[IPS60R360PFD7SAKMA1](#)