

H3-MABA-011085

5-1225MHz 75Ω 1:1 Balun


APPLICATIONS

• Ideally suitable for CATV broadband applications.

FEATURES

- Surface mount
- Impedance ratio: 1:1
- Suitable for use in 50 Ohm and 75 Ohm systems
- RoHS compliant and Pb free
- Available on tape and reel

DIMENSIONS

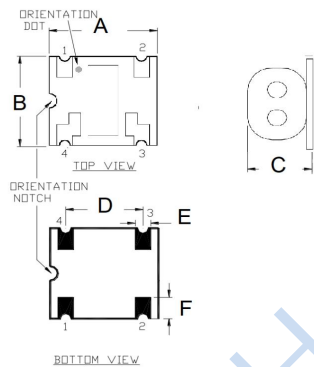


A	B	C
7.11±5%	6.35±5%	4.36±10%
D	E	F
5.08	1.00	1.50

Unless otherwise stated dimensions are in mm


Tolerance: .xx ± 0.25, .xxx ± 0.05

Land Pattern



G	H	I
1.27	2.40	3.05
J		
5.08		

FUNCTIONAL SCHEMATIC



PIN CONFIGURATION

Pin No.	Function
1	Primary Dot (input)
2	Secondary (output 2)
3	Secondary (output 1)
4	Primary (ground)

ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0			75		Ohm
Insertion Loss 1 (pin1-pin3)	5-300MHz		0.2	0.40	dB
	300-1000MHz		0.4	0.80	dB
	1000-1225MHz		0.7	1.00	dB
Insertion Loss 2 (pin1-pin2)	5-300MHz		0.4	0.70	dB
	300-1000MHz		0.6	0.90	dB
	1000-1225MHz		0.7	0.90	dB
Phase Balance	50-300MHz		1.0	4.0	Deg
	300-1225MHz		2.0	9.0	Deg
Amplitude Balance	50-300MHz		0.2	0.4	dB
	300-1225MHz		0.1	0.5	dB
Input Return Loss	50-300MHz	23.0	28.0		dB
	300-1225MHz	15.0	23.0		dB

ABSOLUTE MAXIMUM RATINGS

Parameter	Value
RF Power (Specified at +25°C only)	2000 mW
DC Current	1500 mA
Operating Temperature Range	-40 to 125°C
Storage Temperature Range	-40 to 125°C







Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Address: No.198 Tianqin East Street, Gaoxin West District, Chengdu City

TEST CURVE

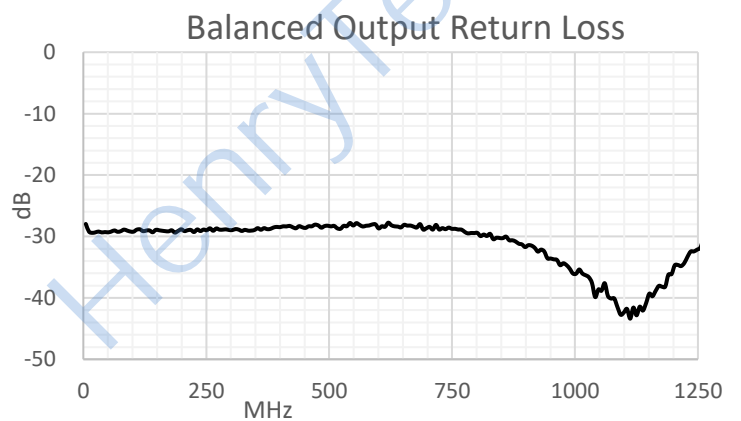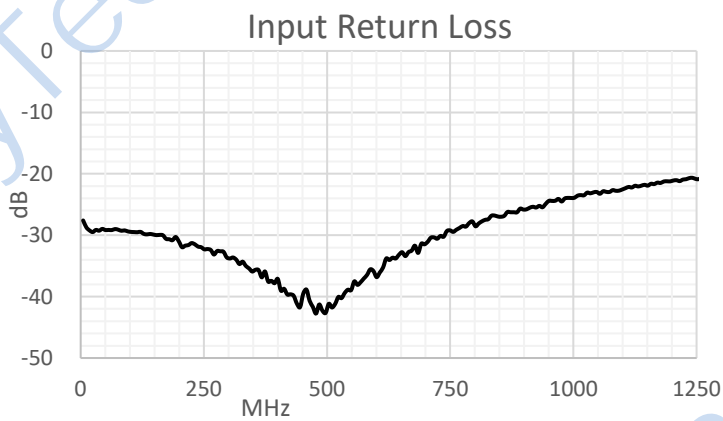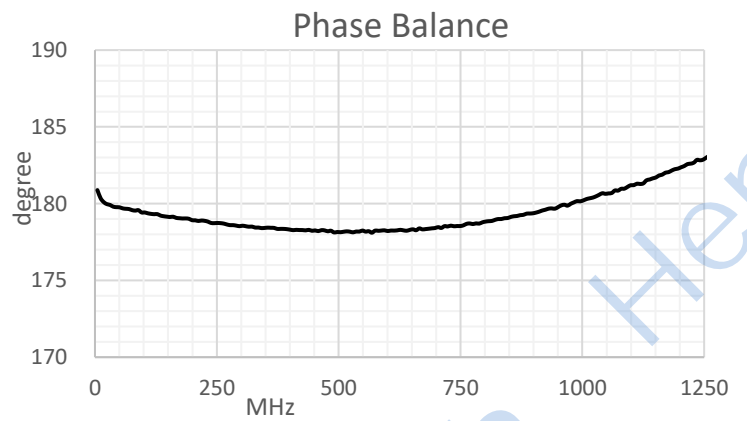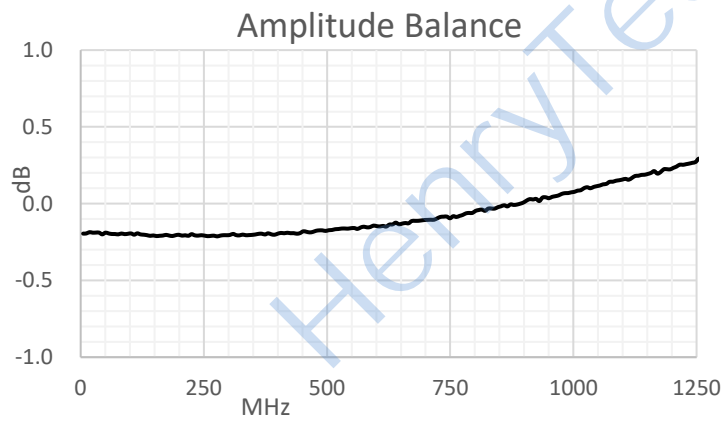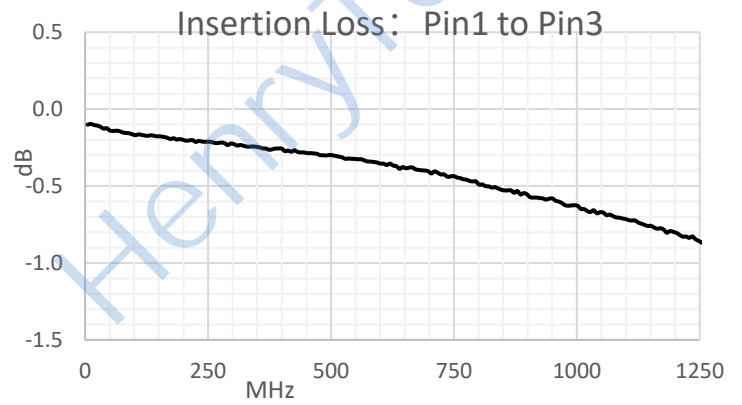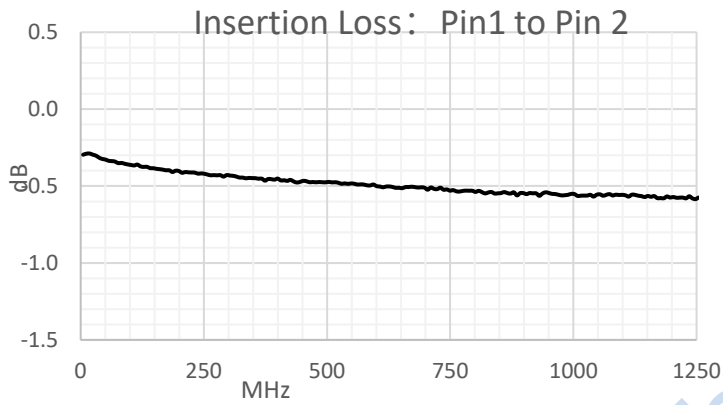

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [HenryTech](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)
[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)
[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)
[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)
[B39242B4360P810](#) [B39781B8005P810](#)