

H3-MAPD-010638-C2WSOT

5-1600MHz 75Ω 2 Way Power Divider


APPLICATIONS

- Ideally suitable for CATV applications.

FEATURES

- Surface mount
- 2 Way 0 degree
- 260°C reflow compatible
- RoHS compliant and Pb free
- Available on tape and reel

DIMENSIONS




A	B	C
4.30	4.30	3.00
D		
1.27		

Unless otherwise stated dimensions are in mm

Tolerance: .xx ± 0.25, .xxx ± 0.05

PCB LAYOUT



E	F	G
1.40	0.76	1.27
H		
4.83		


Suggest:

C1,C1=0.5pF

R1 L1,L2=8.2nH

R1=240Ω


FUNCTIONAL SCHEMATIC

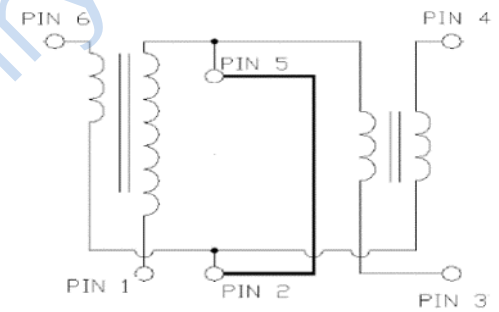

PIN CONFIGURATION

Pin No.	Function
1	Ground
2	External 0.5 pF Capacitor
3	Output 2
4	Output 1
5	External 0.5 pF Capacitor
6	Input

APPLICATION & TEST CIRCUIT

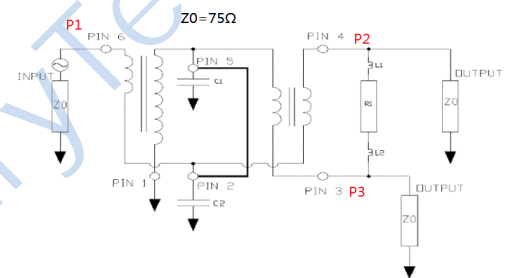

Suggest:

C1,C1=0.5pF

L1,L2=8.2nH

R1=240Ω

ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0 (P1 / P2 / P3)			75 / 75 / 75		Ohm
Insertion Loss (Above 3dB)	5-1002MHZ		0.6	1.0	dB
	1003-1600MHZ		0.8	1.6	dB
Input Return Loss	5-1002MHZ	18.0	39.0		dB
	1003-1600MHZ	16.0	22.0		dB
Output Return Loss	5-1002MHZ	18.0	28.0		dB
	1003-1600MHZ	15.0	18.0		dB
Isolation	5-870MHZ	24.0	30.0		dB
	871-1002MHZ	24.0	31.0		dB
	1003-1600MHZ	22.0	31.0		dB
Amplitude Balance	5-1002MHZ		0.3	0.6	dB
	1003-1600MHZ		0.3	0.8	dB
Phase Balance	5-1002MHZ		0.8	4	Deg
	1003-1600MHZ		1	6	Deg

ABSOLUTE MAXIMUM RATINGS

Parameter	Value
Input RF Power	1W Max
Internal Load Dissipation	0.125W Max
Operating Temperature Range	-40 to 85°C









Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Adress: No.198 Tianqin East Street, Gaoxin West District, Chengdu City

TEST CURVE

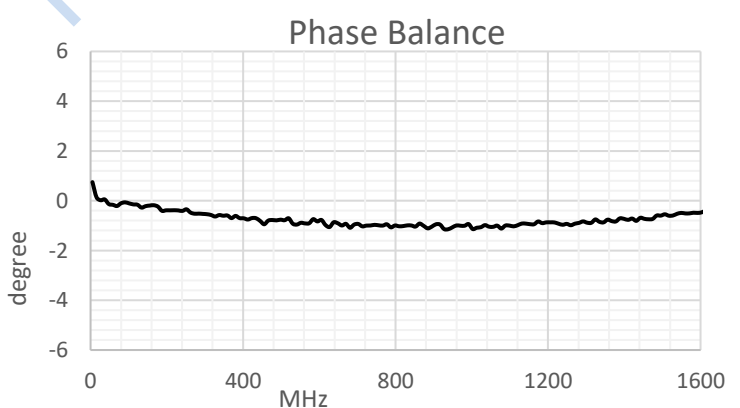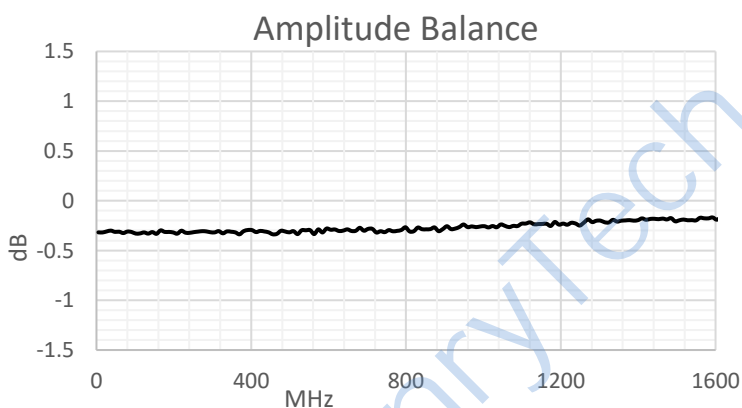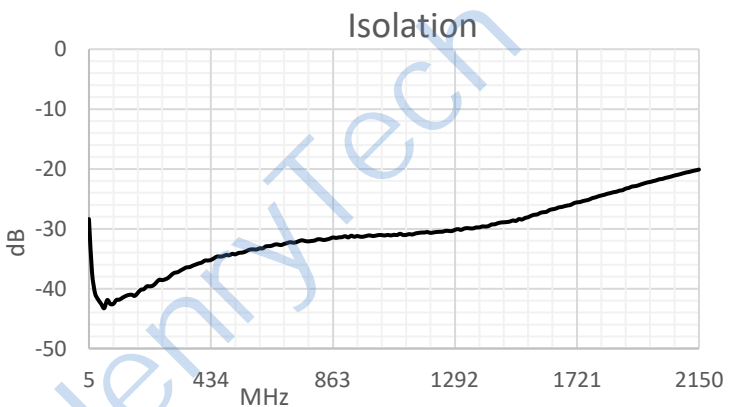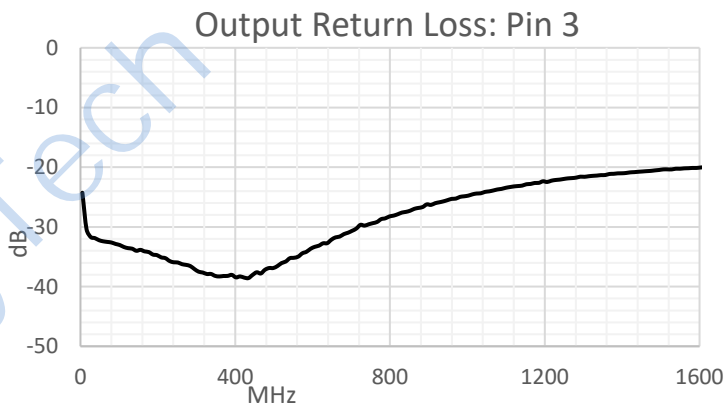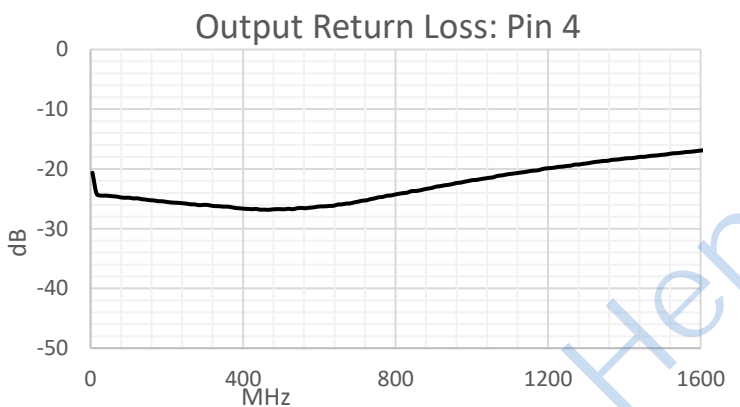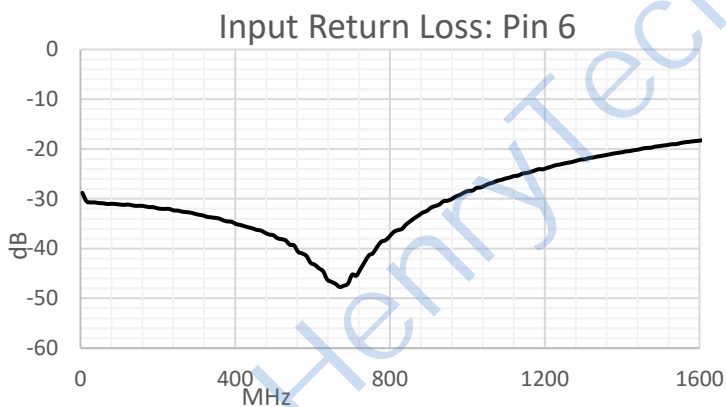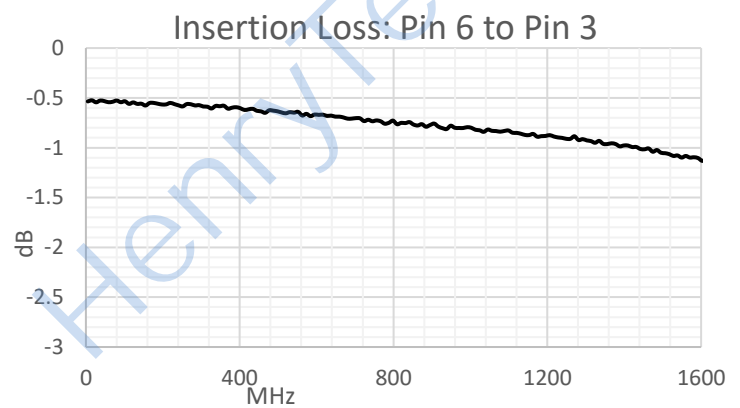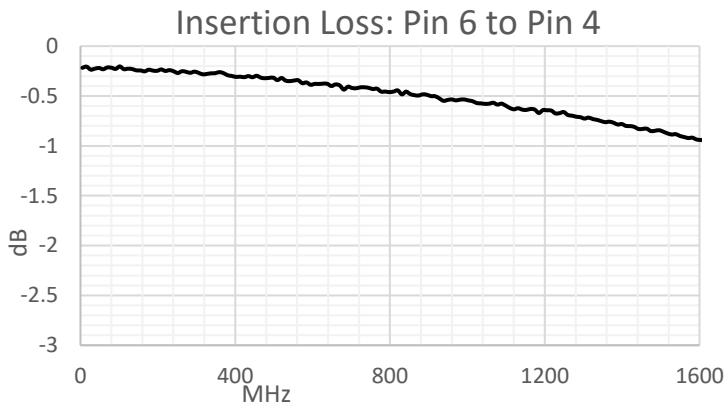

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [HenryTech](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)
[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)
[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)
[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)
[B39242B4360P810](#) [B39781B8005P810](#)