



- **Hollow body design** allows the clip to compress through the mounting hole, then expand back to original shape to lock assembled components securely (PN 0306 does not have a hollow body).
- May be disassembled and reused.
- Offer a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Snap into mounting holes with fingertip pressure—no tools required.
- Vibration, abrasion, and corrosion resistant.


HEYClip™ Nylon Arrow Clips

PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS								
Maximum		Minimum		Maximum		Minimum		Natural	Black		A Length		B Clip Dia.		C Head Dia.		D Head Height		
in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.		
AC Series For combined Panel Thickness $\bar{\leq}$.250" (6,4 mm)																			
.10	2,5	.04	1,0	.190	4,8	.180	4,6	0325	0325B	AC 1996	.45	11,4	.22	5,5	.36	9,1		NEW!	
				.122	3,1	.118	3,0	0315	0315B	AC 15	.39	9,9	.15	3,8		.06	1,5		
				.132	3,4	.130	3,3	0302	0302B	AC 2	.38	9,7	.16	4,1	.28	7,1			
.13	3,2	.06	1,6	.165	4,2	.160	4,1	0318	0318B	AC 18 *	.40	10,2	.19	4,7	.28	7,1	.08	2,0 NEW!	
				.192	4,9	.182	4,6	0301	0301B	AC 1	.42	10,5	.23	5,7	.36	9,1		NEW!	
				.212	5,4	.192	4,9	0328	0328B	AC 28	.45	11,4	.24	6,0	.38	9,5		NEW!	
				.223	5,7	.213	5,4	0307	0307B	AC 7	.45	11,4	.22	5,6	.37	9,4			
.14	3,6	.13	3,2	.132	3,4	.130	3,3	0313	0313B	AC 13	.32	8,1	.16	4,1		.28	7,1	.06	1,5
.15	3,7	.06	1,6	.161	4,1	.151	3,8	0304	0304B	AC 4	.40	10,2	.18	4,6					
.16	4,1	.06	1,6	.223	5,7	.213	5,4	0305	0305B	AC 5	.52	13,2	.25	6,3		.37	9,4		
				.17	4,2	.192	4,9	0311	0311B	AC 11	.52	13,2	.21	5,2					
.19	4,7	.06	1,6	.223	5,7	.213	5,4	0326	0326B	AC 1668	.49	12,5	.25	6,3	.63	15,9	.10	2,5 NEW!	
				.13	3,2	.260	6,6	0309	0309B	AC 9	.58	14,6	.29	7,4	.48	12,3	.07	1,8	
.25	6,4	.13	3,2	.260	6,6	.250	6,4	0321	0321B	AC 21	.63	16,0	.28	7,1	.50	12,7	.05	1,3 NEW!	
ACT Series For combined Panel Thickness $>$.250" (6,4 mm)																			
.30	7,6	.29	7,4	.150	3,8	.145	3,7	0314	0314B	AC 14	.53	13,5	.20	5,0	.27	6,9	.07	1,7	
.33	8,4	.31	7,9	.192	4,9	.182	4,6	0306	0306B	AC 6 **	.55	14,0	.23	5,7	.38	9,7	.06	1,5	
.34	8,6	.06	1,6	.335	8,5	.320	8,1	0317	0317B	AC 17	.90	22,9	.38	9,5	.68	17,3			
.38	9,7	.36	9,1	.260	6,6	.250	6,4	0316	0316B	AC 16	.81	20,6	.28	7,0			.07	1,7 NEW!	
.75	19,1	.50	12,7	.260	6,6	.250	6,4	0324	0324B	AC 24	1.14	28,8	.29	7,3	.61	15,5			

Standard color natural. Consult Heyco for black and other colors.

*AC 18 minimum panel thickness is .03" (0,8 mm), head height is .08" (2,0 mm)

**Not hollow body.

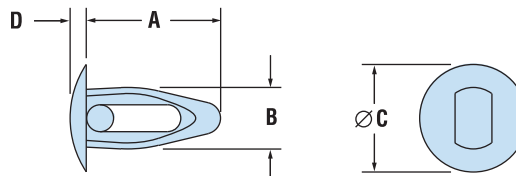

Quick Specs

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: 32°F (0°C) to 185°F (85°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screws & Fasteners](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[5721-1440-1/4-SS](#) [593503FX](#) [0098.0094](#) [0098.9206](#) [0098.9219](#) [0098.9262](#) [596-2114-013](#) [59781-6](#) [0098.0026](#) [0098.9210](#) [0098.9212](#) [60227-01](#) [60227-04](#) [60227-08](#) [60687-01](#) [LOCK WASHER Black](#) [62153-03](#) [62153-11](#) [M316-KSSTMCZ100](#) [M3440-SS](#) [M3442-SS](#) [M3448-SS](#) [6292-1](#) [6-306105-9](#) [6-306131-4](#) [690432-1](#) [699161-000](#) [7230-3](#) [7244](#) [7248-1](#) [7248-2](#) [745564-1](#) [F1209](#) [751-00001](#) [7680](#) [809704-1](#) [8700](#) [8860220](#) [9047](#) [9521](#) [992326-6](#) [992763-3](#) [1-18024-0](#) [1-18028-2](#) [A168P1](#) [A495P1](#) [1-24921-1](#) [125416-1](#) [1260](#) [13-0036](#) [1301810148](#)