




## Heyco® Nylon PCB Supports - Imperial Spacing

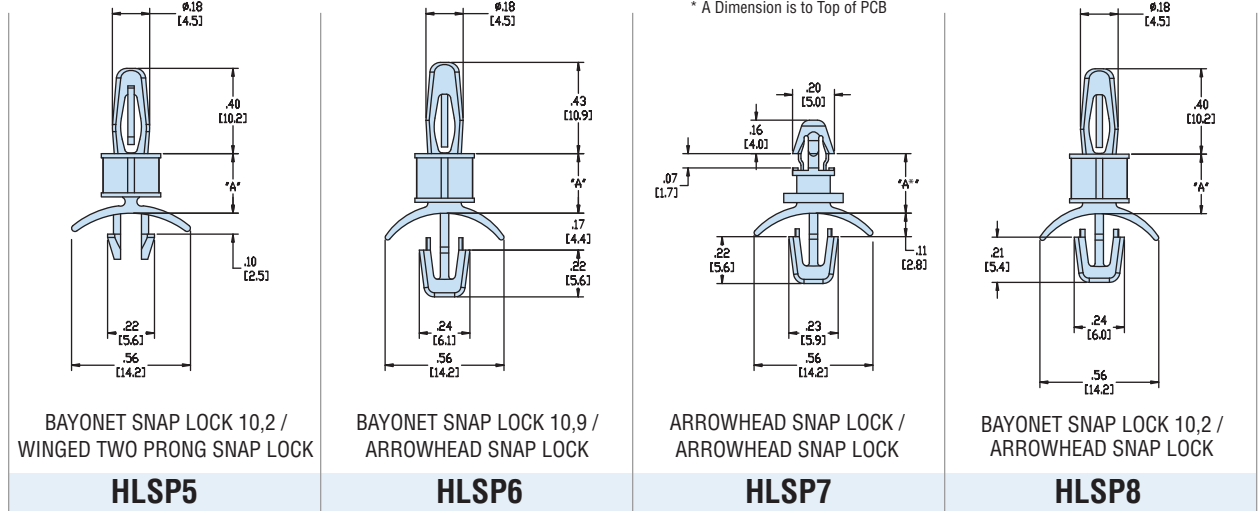

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.157	4,0	.090	2,3	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.157	4,0
<b>Chassis</b>	.078	2,0	.187	4,8	.141	3,6	.187	4,8	.078	2,0	.187	4,8	.055	1,4	.187	4,8

A		PART NO. Natural*	DESCRIPTION	PART NO. Natural*	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.								
.187	4,8	<b>10104</b>	HLSP5-03	<b>10118</b>	HLSP6-03	<b>10132</b>	HLSP7-03	<b>10146</b>	HLSP8-03
.250	6,4	<b>10105</b>	HLSP5-04	<b>10119</b>	HLSP6-04	<b>10133</b>	HLSP7-04	<b>10147</b>	HLSP8-04
.312	7,9	<b>10106</b>	HLSP5-05	<b>10120</b>	HLSP6-05	<b>10134</b>	HLSP7-05	<b>10148</b>	HLSP8-05
.375	9,5	<b>10107</b>	HLSP5-06	<b>10121</b>	HLSP6-06	<b>10135</b>	HLSP7-06	<b>10149</b>	HLSP8-06
.437	11,1	<b>10108</b>	HLSP5-07	<b>10122</b>	HLSP6-07	<b>10136</b>	HLSP7-07	<b>10150</b>	HLSP8-07
.500	12,7	<b>10109</b>	HLSP5-08	<b>10123</b>	HLSP6-08	<b>10137</b>	HLSP7-08	<b>10151</b>	HLSP8-08
.625	15,9	<b>10110</b>	HLSP5-10	<b>10124</b>	HLSP6-10	<b>10138</b>	HLSP7-10	<b>10152</b>	HLSP8-10
.750	19,1	<b>10111</b>	HLSP5-12	<b>10125</b>	HLSP6-12	<b>10139</b>	HLSP7-12	<b>10153</b>	HLSP8-12
.875	22,2	<b>10112</b>	HLSP5-14	<b>10126</b>	HLSP6-14	<b>10140</b>	HLSP7-14	<b>10154</b>	HLSP8-14
1.000	25,4	<b>10113</b>	HLSP5-16	<b>10127</b>	HLSP6-16	<b>10141</b>	HLSP7-16	<b>10155</b>	HLSP8-16
1.125	28,6	<b>10114</b>	HLSP5-18	<b>10128</b>	HLSP6-18	<b>10142</b>	HLSP7-18	<b>10156</b>	HLSP8-18
1.250	31,8	<b>10115</b>	HLSP5-20	<b>10129</b>	HLSP6-20	<b>10143</b>	HLSP7-20	<b>10157</b>	HLSP8-20
1.375	34,9	<b>10116</b>	HLSP5-22	<b>10130</b>	HLSP6-22	<b>10144</b>	HLSP7-22	<b>10158</b>	HLSP8-22

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

\*Consult Heyco for HLSP5 & HLSP6 in V-0 material.



Quick  
Specs

Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circuit Board Hardware - PCB category](#):*

*Click to view products by [Heyco manufacturer](#):*

Other Similar products are found below :

[8919-0-00-15-00-00-03-0](#) [0135-0-15-01-30-27-04-0](#) [5970-1-15-01-32-14-04-0](#) [0149-0-15-15-30-27-04-0](#) [MBI 1 BLUE](#) [7305-0-15-15-47-14-10-0](#) [MLN 150/1 BLACK](#) [8579-0-15-80-11-27-10-0](#) [8579-1-15-15-11-27-10-0](#) [8830-0-15-01-22-14-10-0](#) [8836-0-00-21-00-00-03-0](#) [PRUEF 2 RED](#) [9976-0-00-00-00-00-03-0](#) [PW1616](#) [1215-3-05-00-00-00-01-0](#) [1231](#) [1303-0-15-15-47-14-04-0](#) [1404-3](#) [1404-4](#) [1406-4](#) [1407-3](#) [1406-3](#) [1407-4](#) [1408-3](#) [1424-4](#) [1427-3](#) [1419-4](#) [1426-4](#) [1548-103](#) [1938-0-00-00-00-00-03-0](#) [1942-0-00-00-00-00-03-0](#) [2101-3-00-44-00-00-07-0](#) [2108-2-00-50-00-00-07-0](#) [2109-2-00-44-00-00-07-0](#) [2110-2-00-44-00-00-07-0](#) [2111-2-00-00-00-00-07-0](#) [2113-4-00-44-00-00-07-0](#) [2301-3-00-44-00-00-07-0](#) [2308-1-00-50-00-00-07-0](#) [2313-2-00-00-00-00-07-0](#) [2315-2-01-44-00-00-07-0](#) [2333-1-00-50-00-00-07-0](#) [9000-0-00-00-00-00-03-0](#) [2506-2-00-50-00-00-07-0](#) [2507-2-01-44-00-00-07-0](#) [2508-2-00-44-00-00-07-0](#) [2561-2-00-44-00-00-07-0](#) [9220](#) [9234-0-15-15-30-14-10-0](#) [LAS S G BLACK](#)