




Consult Heyco for Window Tints Other Than Clear

Heyco® Window “View Port” Plugs

Mounting Hole Diameter Range: .187” (4,7 mm) to 2.000” (50,8 mm)

- Molded of **transparent** polycarbonate for internal viewing or light transmission.
- Snap into mounting holes with fingertip pressure—no tools required.
- Multiple sizes for use in .187” (4,7 mm) to 2.000” (50,8 mm) diameter holes.
- Lock firmly into panel up to .125” (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062” (1,6 mm). Thickness may vary.
- **Available in a variety of tints –consult Heyco.**

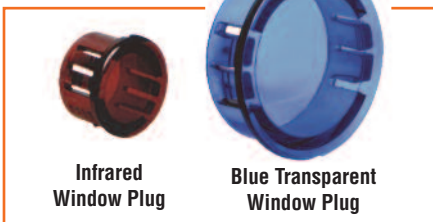


Infrared Window Plug



Blue Transparent Window Plug

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	PART DIMENSIONS			
in.	mm.			Clear*	A Head Diameter		B Overall Height
Single Locking Step for Panel Thickness up to .062” (1,6 mm)							
.187	4,7	1300	WP 187	.25	6,4	.23	5,9
.250	6,4	1301	WP 250	.31	7,9	.31	7,9
.312	7,9	1302	WP 312	.38	9,5		
Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm)							
.375	9,5	1303	WP 375	.47	11,9	.41	10,3
.437	11,1	1304	WP 437	.53	13,5		
.500	12,7	1305	WP 500	.56	14,3		
.625	15,9	1307	WP 625	.73	18,6		
.760	19,3	1309	WP 750	.86	21,8		
.875	22,2	1311	WP 875	.95	24,2	.45	11,5
1.000	25,4	1312	WP 1000	1.13	28,6		
1.093 -	27,8 -	1313	WP 1093	1.22	30,9		
1.125	28,6						
1.375	34,9	1314	WP 1375	1.50	38,1		
1.500	38,1	1316	WP 1500	1.62	41,2		
1.750	44,5	1318	WP 1750	1.88	47,6		
2.000	50,8	1319	WP 2000	2.16	54,8		

*Consult Heyco for Window Plugs in tinted colors.



SINGLE PANEL THICKNESS DESIGN



MULTIPLE PANEL THICKNESS DESIGN



- Matte Finish diffuses light from source behind plug.

Heyco® Diffuser Plugs

MOUNTING HOLE DIAMETER*		PART NO.	DESCRIPTION	PART DIMENSIONS			
in.	mm.			Matte	A Head Diameter		B Overall Height
Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm)							
.375	9,5	1303D	DWP 375	.47	11,9	.41	10,3
.760	19,3	1309D	DWP 750	.92	23,4		
1.000	25,4	1312D	DWP 1000	1.13	28,6	.45	11,5
2.000	50,8	1319D	DWP 2000	2.16	54,8		

*Consult Heyco for other mounting hole diameters.

Material	Polycarbonate
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 239°F (115°C)

Quick Specs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Electrical Enclosure Accessories](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[60121-06-028 C-325 Black](#) [71884-04-028 CM3-100 Black](#) [71884-18-028 LH43-200 Black](#) [71884-24-028 LH75-200 Black](#) [71885-01-028 CM6-150 Black](#) [72459-02-028 DM-3 BLACK](#) [72459-03-028 DM-4 BLACK](#) [81501-01-000 XPL, 9VB Black](#) [82402-01 PT-8 ALUM](#) [1307GSKTSC](#) [1335GSKT3](#) [14101FP-PK](#) [BAS-5104](#) [CB-1263-BT](#) [HM BLACK PANEL](#) [61033-01-000](#) [115123-01-508 CN-RL RS](#) [115124-01-508 CN-XRL XRS](#) [115119-01-000 CN-RL RS](#) [115123-01-000 CN-RL RS](#) [60121-04-028 C-275 Black](#) [60128-01-072](#) [60222-01-028 CM6-225 Black](#) [60272-01-028 CM3-150 Black](#) [60851-01-028 CM69-120 Black](#) [62452-01-000 HML-9VB, EB Black](#) [71884-25-028 LH89-130 Black](#) [AXX2POSTBRCKT](#) [FUPMESK](#) [71884-23-028 LH75-130 Black](#) [1317GSKTSC](#) [8G813V40389](#) [8G820V40620](#) [DVC.1-20-12-30-M6-18-70](#) [DVC.1-20-14-30-M6-18-70](#) [96178](#) [096H10630E](#) [GN 505-10-M8-MB](#) [GN 963-45-45-45-SW](#) [GN 967-20-20-L-2-ZB](#) [1.325.1300.20](#) [52010360](#) [53801090](#) [53801115](#) [AXX2POSTBRCKT 918808](#) [OBOX-385-NBR-M](#) [USPE-16.08](#) [60242-02-028 CM5-200 Black](#) [DIN 7603-AL-14-18-A](#) [DIN 7603-AL-16-20-A](#) [DIN 7603-AL-20-24-A](#)