a PennEngineering® Company



- Protects the lifeline of your electric/ electronic products by absorbing the forces of pull, push, and twist that may be exerted on the flexible power cord.
- Securely anchors, insulates, and protects cables at panel entry points.
- Sizes SR 7-Series to SR 9-Series for mounting hole diameters from .875" (22,2 mm) to 1.187" (28,6 mm).
- Sizes for thin .062" (1,6 mm) panel available: SR 8N-2

See chart for details.

- See page 4-38 for corresponding Mounting Hole Plugs which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.
- Consult Heyco for other wire types and sizes.
- See pages 4-27 & 4-28 for SR assembly tools.
- For Double D Mounting Hole Punches, see page 4-30.


Heyco® Original Strain Relief Bushings

Straight-Thru for Round Cables .875" (22,2 mm) to 1.187" (30,1 mm) Mounting Holes Fit 1/2" or 3/4" Electrical Knock-out Hole Sizes

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.	DESCRIPTION	PART DIM.		Mounting
UL Type	AWG/ Conductors	Approx Si in.	ximate ze mm.	Mou	A nting Dia. mm.	To Pre Rota in.	vent	Finis Fit P Thicks in.	anel	Black		C BODY LENGTH in. mm.		Hole Plug PART NO.
SJ, SJT & SJ0	16/2 18/3 14/2 16/3 18/4	.325 .330 .350 .355 .360	8,3 8,4 8,9 9,0 9,1	.875	22,2	.770	19,6	.125	3,2	1240	SR 7K-2	.750	19,1	2509
Same as SR 7K-2 above except				See Schematic				.125	3,2	1271	SR 7KR-2	.750	19,1	2509
SJT	14/3 12/3 18/2	.370 .425 .390	9,4	.875	22,2	.770	19,6	.125	3,2	1247	SR 7W-2	.750	19,1	2509
S, SO, & ST	18/3 16/2 16/3	.405 .405 .430	9,9 10,3 10,3 10,9											
Same as SR 7W-2 above except								.200	5,1	1250	SR 7L-2	750	19,1	consult Heyco
SJT	12/3	.425- .475	10,8- 12,1	.875	22,2	.840	21,3	.125	3,2	1497	SR 31-2		20,6	2509
S & ST	14/2 14/3 12/2	.530 .560 .600	13,5 14,2 15,3	.875	22,2	.840	21,3	.062	1,6	1254	SR 8N-2	.828	21,0	2509
Same as SR 8N-2 above except							.125 .187	3,2 4,8	1260 1274	SR 8P-2 SR 8L-1		20,6 20,6	2509 consult Heyco	
S	12/2 12/3 10/2	.600 .635 .640	15,2 16,1 16,3	1.093 1.093 1.093	27,7 27,7 27,7	1.000	05.1	007		4007	00.00.6	4 000	05.	0747
S, SO & ST	10/3	.690	17,5	1.187	30,2	1.000	25,4	.281	7,1	1287	SR 9P-2	1.000	25,4	2717
SRDT	10/4	onoult Llov												

Standard color black. Consult Heyco for white and other colors.

^{*}Maximum Panel Thickness. Part has additional clearance. Consult Heyco for your Custom Finished Fit Panel Thickness.

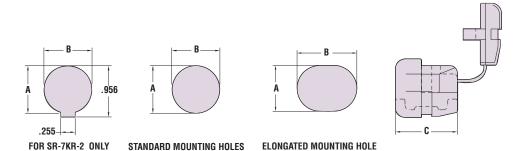



Material

Certifications

Flammability Rating Temperature Range Nylon 6/6

A Recognized under the Component Program of Underwriters' Laboratories File E15331

(F) Certified by the Canadian Standards Association File 8919 94V-2

-.04°F (-18°C) to 221°F (105°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Cable Glands, Strain Reliefs & Cord Grips category:

Click to view products by Heyco manufacturer:

Other Similar products are found below:

1218 1300980012 1300980105 DBZM-6828 1498 915 300623 5632NM 1124 1151 561-MP6P4WH 5534M 9000005073 52104486

5315817 N16 025 0112 1 N16 020 0112 1 M6106 7422 NG-9516 Gasket N16 016 0112 1 NG-9514 Gasket 52006151 2704 1.097.2012.50

1.152.1300.01 1.152.2000.50 1.152.2100.01 1.152.4000.50 1.209.1218.70 1.209.6400.71 1.609.1100.01 1.609.2900.15 1.609.3200.52

1.609.5000.51 1.609.6300.50 1.676.2500.50 53112705 53112715 53112735 53119073 54115405 52004120 52001894 53018160

APGPG36BA 1300990004 1.033.0913.01 1.033.1116.01 1.033.2936.01