




## Heyco® Shorty Plugs

Single Locking Step for Panel Thickness up to: .062" (1,6 mm)  
 Mounting Hole Diameter Range: .187" (4,7 mm) to 1.093" (27,8 mm)

- **Limited intrusion .125" (3,2 mm) inside the panel.**
- Quick and easy installation.
- Multiple sizes for mounting holes from .187" (4,7 mm) to 1.093" (27,8 mm).
- Approximate Head Thickness: .062" (1,6 mm).
- For Shorty Window Plugs see page 6-36.

MOUNTING HOLE DIAMETER		PART NO.			DESCRIPTION	PART DIMENSIONS			
		Black	White	Colors xx		A		B	
in.	mm.				Head Diameter in.	mm.	Overall Height in.	mm.	
.187	4,7	<b>2590</b>	<b>2591</b>	2592xx	DP 187†	.25	6,4	.23	5,9
.218	5,5	<b>1654</b>	<b>1655</b>	1656xx	SP 218	.28	7,1	.25	6,4
.281	7,1	<b>1660</b>	<b>1661</b>	1662xx	SP 281	.34	8,7		
<b>NEW!</b> .307	7,8	<b>1657</b>	<b>1658</b>	1659xx	SP 307	.37	9,4		
.312	7,9	<b>1678</b>	<b>1679</b>	1680xx	SP 312	.38	9,5		
.343	8,7	<b>1663</b>	<b>1664</b>	1665xx	SP 343	.41	10,3		
.375	9,5	<b>1681</b>	<b>1682</b>	1683xx	SP 375	.47	11,9		
<b>NEW!</b> .390	9,9	<b>1708</b>	<b>1709</b>	1710xx	SP 390				
.406	10,3	<b>1666</b>	<b>1667</b>	1668xx	SP 406				
.437	11,1	<b>1684</b>	<b>1685</b>	1686xx	SP 437	.53	13,5		
.468	11,9	<b>1669</b>	<b>1670</b>	1671xx	SP 468				
.500	12,7	<b>1687</b>	<b>1688</b>	1689xx	SP 500	.56	14,3		
.531	13,5	<b>1672</b>	<b>1673</b>	1674xx	SP 531	.59	15,1		
.593	15,1	<b>1675</b>	<b>1676</b>	1677xx	SP 593	.69	17,5		
.625	15,9	<b>1690</b>	<b>1691</b>	1692xx	SP 625	.72	18,3		
<b>NEW!</b> .687	17,4	<b>1719</b>	<b>1720</b>	1721xx	SP 687	.79	20,1		
.750	19,0	<b>1693</b>	<b>1694</b>	1695xx	SP 750	.84	21,4		
.781	19,8	<b>1696</b>	<b>1697</b>	1698xx	SP 781	.89	22,6		
.875	22,2	<b>1699</b>	<b>1700</b>	1701xx	SP 875	.97	24,6		
1.000	25,4	<b>1702</b>	<b>1703</b>	1704xx	SP 1000	1.20	30,5		
1.093	27,8	<b>1705</b>	<b>1706</b>	1707xx	SP 1093	1.22	31,0		

Standard colors black or white. Consult Heyco for other colors (see below).  
 † Convex, glossy finish head.  
 xx indicates that, following the color match process, Heyco adds a two letter suffix to the Root Part No. shown. This suffix will identify your particular CUSTOM Color selection. Consult Heyco for molded nylon color chips for accurate matching. For details as well as information regarding our Stock Colors, see page 6-53.

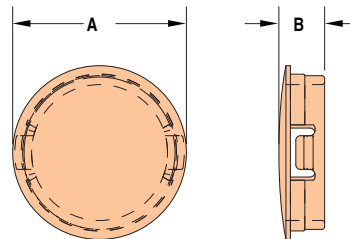

*Quick Specs*

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E51579 Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Conduit Fittings & Accessories](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[M3231GAB](#) [M3231GAC](#) [M3231GAE](#) [M3231GL](#) [M3231GN](#) [M3231GT](#) [VC-937-16/RED](#) [VC-562-16/RED](#) [VC-1125-16/RED](#) [DM0240-1/2A](#) [3408B](#) [G6002](#) [M4340GAE](#) [C2016-P](#) [C2012-P](#) [3407B](#) [1660-P](#) [561-87BG11BLK](#) [561-75BG11B](#) [BVNV-P428](#) [BVBV-P366](#) [2276](#) [2663-P](#) [3405B](#) [C2070-P](#) [3582V](#) [4975](#) [2644-P](#) [2955](#) [M50](#) [2404-P](#) [2291](#) [2133-P](#) [3048F](#) [VC12516](#) [RC156-0500](#) [DM0523-1/2A](#) [1035A](#) [DMS0250-1A](#) [DMS0313-1A](#) [1040A](#) [1050A](#) [R1/8A](#) [DMPC0490-1/2A](#) [DMPC0521-1/2A](#) [DMPC0552-1/2A](#) [1070A](#) [R1/2A](#) [E1-7/8B](#) [061A](#) [R3/4A](#)