



## Heyco® Thin Panel Dome Plugs

Multiple Locking Steps for Panels as Thin as .020" (0,5 mm)  
Mounting Hole Diameter Range: .218" (5,5 mm) to .875" (22,2 mm)\*

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS				
Thickness at Locking Finger Steps		Mounting Hole Diameter*		Black	White		A		B		
in.	mm.	in.	mm.			Head Diameter	in.	mm.	Overall Height	in.	mm.

Three Steps to .048" (1,2 mm) thick

.020	0,5	.218	5,5	<b>1654N</b>	<b>1655N</b>	SP 218N	.28	7,1	.25	6,4
		.250	6,4	<b>2607N</b>	<b>2608N</b>	SP 250N	.31	7,9		
		.281	7,1	<b>1660N</b>	<b>1661N</b>	SP 281N	.34	8,7		
		.312	7,9	<b>1678N</b>	<b>1679N</b>	SP 312N	.38	9,5		
		.343	8,7	<b>1663N</b>	<b>1664N</b>	SP 343N	.41	10,3		
		.375	9,5	<b>1681N</b>	<b>1682N</b>	SP 375N	.47	11,9		

Five Steps to .064" (1,6 mm) thick


.020	0,5	.500	12,7	<b>1687N</b>	<b>1688N</b>	SP 500N	.56	14,3	.25	6,4		
		.032	0,8	.512	13,0	<b>1716N</b>					<b>1717N</b>	SP 512N
		.040	1,0	.625	15,9	<b>1690N</b>					<b>1691N</b>	SP 625N
		.048	1,2	.750	19,1	<b>1693N</b>					<b>1694N</b>	SP 750N
		.064	1,6	.875	22,2	<b>1699N</b>					<b>1700N</b>	SP 875N

Standard color black. Consult Heyco for other colors.

\*Consult Heyco for other Mounting Hole Diameters. Our Axccl Rapid Response Team is ready to meet your requirements.

- Provide a flush, finished fit in panels as thin as .020" (0,5 mm).
- Quick and easy installation.
- Multiple sizes for mounting holes from .218" (5,5 mm) to .875" (22,2 mm).
- Consult Heyco for other Thin Panel Mounting Hole Diameters.
- Lock firmly in panels up to .064" (1,6 mm) thick.

**NEW!**

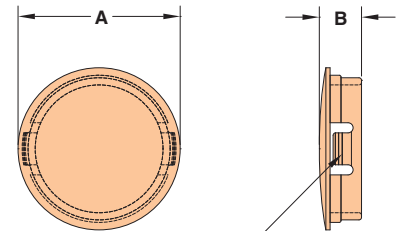

MULTIPLE FINGER STEPS FOR TIGHT PANEL FIT

## Heyco® Thin Panel versus Shorty Plugs

Choose from Multiple Locking Steps, for the Fit and Finish Your Application Requires

Mounting Hole Diameter	PANEL DIMENSIONS					PART NO.		DESCRIPTION	
	Maximum Thickness Locking Steps					Black	White		
	inches/millimeters								
in.	mm.	.020 0,5	.032 0,8	.040 1,0	.048 1,2	.064 1,6			
.218	5,5	x	x		x		<b>1654N</b>	<b>1655N</b>	SP 218N
						x	<b>1654</b>	<b>1655</b>	SP 218
.250	6,4	x	x		x		<b>2607N</b>	<b>2608N</b>	SP 250N
.281	7,1	x	x		x		<b>1660N</b>	<b>1661N</b>	SP 281N
						x	<b>1660</b>	<b>1661</b>	SP 281
.312	7,9	x	x		x		<b>1678N</b>	<b>1679N</b>	SP 312N
						x	<b>1678</b>	<b>1679</b>	SP 312
.343	8,7	x	x		x		<b>1663N</b>	<b>1664N</b>	SP 343N
						x	<b>1663</b>	<b>1664</b>	SP 343
.375	9,5	x	x		x		<b>1681N</b>	<b>1682N</b>	SP 375N
						x	<b>1681</b>	<b>1682</b>	SP 375
.500	12,7	x	x	x	x	x	<b>1687N</b>	<b>1688N</b>	SP 500N
						x	<b>1687</b>	<b>1688</b>	SP 500
.625	12,7	x	x	x	x	x	<b>1690N</b>	<b>1691N</b>	SP 625N
						x	<b>1690</b>	<b>1691</b>	SP 625
.750	19,1	x	x	x	x	x	<b>1693N</b>	<b>1694N</b>	SP 750N
						x	<b>1693</b>	<b>1694</b>	SP 750
.875	22,2	x	x	x	x	x	<b>1699N</b>	<b>1700N</b>	SP 875N
						x	<b>1699</b>	<b>1700</b>	SP 875

Material Certifications



Nylon 6/6  
Recognized under the Component Program of Underwriters' Laboratories, File E51579



Certified by Canadian Standards Association, File 8919

Flammability Rating  
Temperature Range

94V-2  
-40°F (-40°C) to 221°F (105°C)

Quick Specs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Mounting & Accessories](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[582603-1](#) [009333-000](#) [727844N003](#) [747](#) [809090N001](#) [843188-000](#) [8666](#) [967279N002](#) [DB-11](#) [1300840039](#) [1300900096](#) [1301800416](#)  
[1302264450](#) [1300830184](#) [1300830729](#) [1300900039](#) [1301580036](#) [1301850553](#) [1301860939](#) [1302000074](#) [1302261315](#) [1302264431](#)  
[1337706-2](#) [APA18-AK](#) [1724](#) [1-787307-1](#) [185491N001](#) [1868](#) [HP-6N](#) [C-202-C](#) [202C221-13-0](#) [CA7308-000](#) [8S23-75FR-CS8184](#) [2684](#) [9648](#)  
[3089](#) [988382-000](#) [A72821-000](#) [AA401](#) [173506-000](#) [202C292-13-0](#) [202C302-13-0](#) [2109](#) [300625](#) [3330](#) [3412](#) [M9142](#) [M9143](#) [529732-000](#)  
[561-50D1187](#)