

“Stay Connected with Heyco” Strain Relief Bushings





Heyco® In-Line Strain Relief Bushing

- Quick and easy to secure on any SPT-2 wire.
- Cost effective. No cutting or tools needed as with metal clamp type strain reliefs. There is no risk of repetitive motion strain or injury.
- UL Recognized (far exceeds UL's 35# pull-out test).
- UL Approved for use with SPT-2 Wire.
- Replaces UL Knot method of providing strain relief.

| WILL FIT THESE CABLES | | | | PART DIMENSIONS | | | | | | | | PART NO. Black | DESCRIPTION |
|-----------------------|--------------------|------------------|-----------|-----------------|------|-----|------|-----|-----|-----|-----|-------------------|-------------|
| UL Type | AWG/ Conductors | Approximate Size | | A | | B | | C | | D | | | |
| | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | | |
| SPT-2 | 18/2 | .150 x .280 | 3,8 x 7,1 | .41 | 10,4 | .70 | 17,8 | .29 | 7,4 | .35 | 8,9 | 1854 | ISR 14-27 |

Standard color black. Consult Heyco for white and other colors.
No panel required for application.

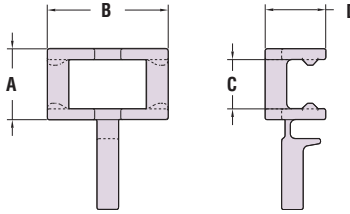

Heyco® Strain Relief Bushings LabKit #1

(Part No. 1999)

Use Heyco LabKits!

- Heyco LabKits are perfect for product design departments, experimental labs, and for all prototype work.
- Heyco LabKit #1 contains an assortment of our most popular Strain Relief Bushings.
- Heyco also offers lab kits for Liquid Tight Cordgrips, Bushings, Hole Plugs, HEYware, and Grommets.



*Quick
Specs*

Material
Certifications

Nylon 6/6



Recognized under Underwriters' Laboratories File E15331 (SRs Only)
Certified by the Canadian Standards Association File 8919 (SRs Only)

Flammability Rating
Temperature Range

94V-2
-04°F (-18°C) to 221°F (105°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[1218](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [915](#) [300623](#) [5632NM](#) [1124](#) [1151](#) [561-MP6P4WH](#) [5534M](#) [9000005073](#) [52104486](#)
[5315817](#) [N16 025 0112 1](#) [N16 020 0112 1](#) [M6106](#) [7422](#) [NG-9516 Gasket](#) [N16 016 0112 1](#) [NG-9514 Gasket](#) [52006151](#) [2704](#) [1.097.2012.50](#)
[1.152.1300.01](#) [1.152.2000.50](#) [1.152.2100.01](#) [1.152.4000.50](#) [1.209.1218.70](#) [1.209.6400.71](#) [1.609.1100.01](#) [1.609.2900.15](#) [1.609.3200.52](#)
[1.609.5000.51](#) [1.609.6300.50](#) [1.676.2500.50](#) [53112705](#) [53112715](#) [53112735](#) [53119073](#) [54115405](#) [52004120](#) [52001894](#) [53018160](#)
[APGPG36BA](#) [1300990004](#) [1.033.0913.01](#) [1.033.1116.01](#) [1.033.2936.01](#)