



Heyco® Open/Closed Universal Bushings


Mounting Hole Diameter Range: .500" (12,7 mm) to 2.500" (63,5 mm)

- **Split design allows side entry** and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- Parts can be assembled into holes that already contain cables or tubing.
- Only fingertip pressure required to snap-lock the bushing into its mounting hole.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Flexible shutters adjust to accommodate and support any shape from .125" (3,2 mm) to a maximum inside diameter of 1.970" (43,2 mm).
- Absorb vibration, cushion and insulate cables, tubing, hoses or shafts.
- Available in multiple sizes for use in .500" (12,7 mm) to 2.500" (63,5 mm) diameter holes.

| MOUNTING HOLE DIAMETER | | PART NO. Black | DESCRIPTION | Maximum Inside Diameter | | PART DIMENSIONS A Head Diameter | | B Overall Height | |
|---|------|-------------------|-------------|-------------------------|------|---------------------------------------|------|---------------------|------|
| in. | mm. | | | in. | mm. | in. | mm. | in. | mm. |
| Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm) | | | | | | | | | |
| .500 | 12,7 | 2055SP | OCUB 500 | .31 | 7,6 | .56 | 14,2 | .39 | 9,8 |
| .625 | 15,9 | 2077SP | OCUB 625 | .44 | 11,1 | .69 | 17,5 | | |
| .750 | 19,1 | 2089SP | OCUB 750 | .50 | 12,7 | .50 | 20,3 | | |
| .875 | 22,2 | 2119SP | OCUB 875 | .56 | 14,3 | .92 | 23,4 | | |
| 1.000 | 25,4 | 2137SP | OCUB 1000 | .75 | 19,1 | 1.05 | 26,7 | .41 | 10,3 |
| 1.093 | 27,8 | 2157SP | OCUB 1093 | .81 | 20,6 | 1.16 | 29,5 | | |
| 1.250 | 31,8 | 2196SP | OCUB 1250 | .94 | 23,8 | 1.44 | 36,6 | | |
| 1.375 | 34,9 | 2184SP | OCUB 1375 | 1.00 | 25,4 | 1.44 | 36,6 | | |
| 1.500 | 38,1 | 2213SP | OCUB 1500 | 1.06 | 26,9 | 1.56 | 39,6 | .42 | 10,7 |
| 2.000 | 50,8 | 2422SP | OCUB 2000 | 1.64 | 41,7 | 2.12 | 53,9 | | |

| Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm) | | | | | | | | | |
|---|------|---------------|----------|------|------|------|------|-----|------|
| 2.500 | 63,5 | 2440SP | OCUB 2.5 | 1.97 | 43,2 | 2.60 | 66,0 | .72 | 18,3 |

Standard color black. Consult Heyco for white and other colors.

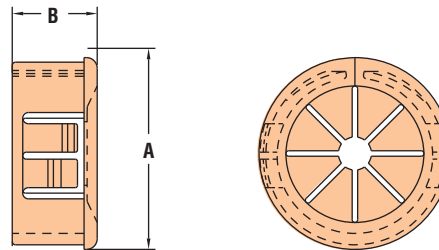

Quick Specs

| | |
|---------------------|---|
| Material | Nylon 6/6 |
| Certifications | Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by the Canadian Standards Association, File 8919 |
| Flammability Rating | 94V-2 |
| Temperature Range | -4°F (-18°C) to 221°F (105°C) |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Grommets & Bushings](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[M10-036565-101](#) [M10-036565-143](#) [M10-036565-183](#) [205339-4](#) [M10-036565-122](#) [M10-036565-163](#) [3-1991136-0](#) [561-FGUP0850B](#) [561-MP13716](#) [561-FGUP0400N](#) [1398081-1](#) [1301800320](#) [M10-036565-232](#) [2298](#) [2407](#) [2141-P](#) [HTL-40-10-TPE](#) [2417-P](#) [2917-P](#) [3108-P](#) [2871-P](#) [100187](#) [100188](#) [100216](#) [100223](#) [100236](#) [52001970](#) [52002000](#) [52002010](#) [52002020](#) [52002050](#) [1301800412](#) [FEM 27-35](#) [100175](#) [100176](#) [100178](#) [100182](#) [100196](#) [100238](#) [100244](#) [100744](#) [100084](#) [100174](#) [100177](#) [100179](#) [100180](#) [100181](#) [100186](#) [100721](#) [103584](#)