




## Heyco® Snub Bushings

Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)  
Mounting Hole Diameter Range: .375" (9,5 mm) to .875" (22,2 mm)

| MOUNTING HOLE DIAMETER |      | APPROXIMATE CABLE DIAMETER* ACCOMMODATED |      | PART NO.<br>Black | DESCRIPTION | PART DIMENSIONS    |      |                     |      |
|------------------------|------|--|------|-------------------|-------------|--------------------|------|---------------------|------|
| in.                    | mm.  | in.                                      | mm.  |                   |             | A<br>Head Diameter |      | B<br>Overall Height |      |
|                        |      |  |      |                   |             | in.                | mm.  | in.                 | mm.  |
| .375                   | 9,5  | 1/8                                      | 3,2  | <b>2034</b>       | K 375-125   | .46                | 11,7 | .42                 | 10,7 |
| .437                   | 11,1 | 3/16                                     | 4,8  | <b>2047</b>       | K 437-187   | .47                | 11,9 |                     |      |
| .500                   | 12,7 | 1/4                                      | 6,4  | <b>2057</b>       | K 500-250   | .56                | 14,2 |                     |      |
| .625                   | 15,9 | 3/8                                      | 9,5  | <b>2068</b>       | K 625-375   | .73                | 18,5 | .44                 | 11,2 |
| .750                   | 19,1 | 1/2                                      | 12,7 | <b>2088</b>       | K 750-500   | .91                | 23,0 |                     |      |
| .875                   | 22,2 | 5/8                                      | 15,9 | <b>2109</b>       | K 875-625   | 1.02               | 25,8 | .48                 | 12,3 |


Standard color black. Consult Heyco for white and other colors.

\*Consult Heyco for other Mounting Hole and Inside Diameter configurations. Our Axcell Rapid Response Team is ready to meet your requirements.

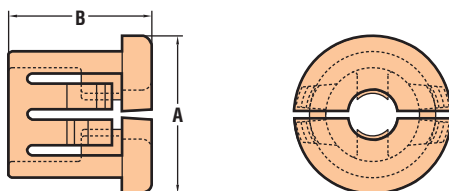

## Heyco® Sealing Washers

| WILL FIT THESE ELECTRICAL FITTING NPT TRADE SIZES | PART NO.<br>Black | DESCRIPTION | PART DIMENSIONS      |      |                       |      |                |     |
|---|-------------------|-------------|----------------------|------|-----------------------|------|----------------|-----|
|   |                   |             | A<br>Inside Diameter |      | B<br>Outside Diameter |      | C<br>Thickness |     |
|   |                   |             | in.                  | mm.  | in.                   | mm.  | in.            | mm. |
| 1/4   | <b>3258</b>       | SW 1/4      | .54                  | 13,7 | .80                   | 20,2 |                |     |
| 3/8   | <b>3259</b>       | SW 3/8      | .67                  | 17,0 | 1.01                  | 25,5 | .13            | 3,2 |
| 1/2   | <b>3260</b>       | SW 1/2      | .85                  | 21,6 | 1.24                  | 31,5 |                |     |
| 3/4   | <b>3261</b>       | SW 3/4      | 1.03                 | 26,2 | 1.50                  | 38,1 | .14            | 3,4 |
| 1   | <b>3262</b>       | SW 1        | 1.28                 | 32,5 | 1.77                  | 45,0 | .18            | 4,4 |
| 1-1/4   | <b>3264</b>       | SW 1-1/4    | 1.66                 | 42,2 | 2.16                  | 54,8 |                |     |
| 1-1/2   | <b>3265</b>       | SW 1-1/2    | 1.86                 | 47,2 | 2.44                  | 62,0 | .16            | 4,1 |
| 2   | <b>3257</b>       | SW 2        | 2.32                 | 58,9 | 2.93                  | 74,4 | .18            | 4,6 |



Material  
Certifications

Nylon 6/6  
Recognized under the Component Program of Underwriters' Laboratories, File E15331  
 Certified by Canadian Standards Association, File 8919

Flammability Rating  
Temperature Range

94V-2  
-4°F (-18°C) to 221°F (105°C)



- The ID opens to accept the cable then closes firmly when installed into the mounting hole.
- Provide insulation plus light strain relief.
- Suitable for 1/8" (3,2 mm) to 5/8" (15,9 mm) diameter cable, tubing or hose.



- Make fittings and connectors liquid tight, dust tight, and oil tight at enclosure.
- Suitable for wet locations requiring a separate gasket between the box and fitting.
- Also suitable for other panel sealing applications.
- Easy to install since washers seal off on the perimeter, not on the connector threads.
- Special double sealing ridges compensate for minor unevenness at enclosure.
- Quick Specs below do not apply.

Quick  
Specs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Grommets & Bushings](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[M10-036565-101](#) [M10-036565-143](#) [M10-036565-183](#) [205339-4](#) [M10-036565-122](#) [M10-036565-163](#) [3-1991136-0](#) [561-FGUP0850B](#) [561-MP13716](#) [561-FGUP0400N](#) [1398081-1](#) [1301800320](#) [M10-036565-232](#) [2298](#) [2407](#) [2141-P](#) [HTL-40-10-TPE](#) [2417-P](#) [2917-P](#) [3108-P](#) [2871-P](#) [100187](#) [100188](#) [100216](#) [100223](#) [100236](#) [52001970](#) [52002000](#) [52002010](#) [52002020](#) [52002050](#) [1301800412](#) [FEM 27-35](#) [100175](#) [100176](#) [100178](#) [100182](#) [100196](#) [100238](#) [100244](#) [100744](#) [100084](#) [100174](#) [100177](#) [100179](#) [100180](#) [100181](#) [100186](#) [100721](#) [103584](#)