




## Heyco® Feet of Strength Feet with Push Rivet

PART DIMENSIONS						PANEL DIMENSIONS				PART NO. Black	DESCRIPTION		
A Overall Height	B Top Diameter		C Bottom Diameter		Mounting Hole Diameter	Thickness Range Minimum		Thickness Range Maximum					
in. mm.	in. mm.	in. mm.	in. mm.	in. mm.		in. mm.	in. mm.	in. mm.	in. mm.	in. mm.			
<b>FSR Series</b>													
.16	4,0	.43	10,8	.39	10,0	.142	3,6	.02 .05 .06 .10	0,5 1,2 1,5 2,5	.05 .08 .10 .14	1,2 2,0 2,5 3,5	<b>2519</b> <b>2520</b> <b>2521</b> <b>2550</b>	FSR 16-14-05 FSR 16-14-08 FSR 16-14-10 FSR 16-14-14
.17	4,2	.83	21,0	.79	20,0	.165	4,2	.03 .07 .11 .15	0,8 1,8 2,9 3,8	.07 .11 .15 .19	1,8 2,8 3,7 4,8	<b>2522</b> <b>2523</b> <b>2524</b> <b>2525</b>	FSR 17-17-07 FSR 17-17-11 FSR 17-17-15 FSR 17-17-19
.22	5,5	.56	14,2	.53	13,5	.122	3,1	.03 .07	0,8 1,8	.07 .11	1,8 2,8	<b>2517</b> <b>2518</b>	FSR 22-12-07 FSR 22-12-11
.24	6,0	.59	15,0	.55	14,0	.165	4,2	.02	0,6	.04	1,0	<b>2500</b>	FSR 24-17-04
								.04	1,0	.08	2,0	<b>2501</b>	FSR 24-17-08
								.08	2,0	.12	3,1	<b>2502</b>	FSR 24-17-12
.24	6,0	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	<b>2506</b>	FSR 24-21-05
								.05	1,3	.09	2,3	<b>2507</b>	FSR 24-21-09
								.03	0,8	.07	1,8	<b>2526</b>	FSR 241-17-07
.24	6,0	.83	21,0	.79	20,0	.165	4,2	.08	1,9	.11	2,8	<b>2527</b>	FSR 241-17-11
								.11	2,9	.16	4,0	<b>2528</b>	FSR 241-17-16
								.01	0,3	.03	0,8	<b>2575</b>	FSR 31-17-03
.31	8,0	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.08	2,0	<b>2529</b>	FSR 31-17-08
								.08	2,1	.12	3,1	<b>2530</b>	FSR 31-17-12
								.04	1,0	.08	2,0	<b>2532</b>	FSR 35-17-08
.35	9,0	.59	15,0	.55	14,0	.165	4,2	.08	2,0	.12	3,1	<b>2533</b>	FSR 35-17-12

Standard color black.

- Require only fingertip pressure for fast, easy installation.
- May be released from inside the panel.
- Multiple sizes range in height from .16" (4,0 mm) to .35" (9,0 mm).
- Part Description Key:  
FSR XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

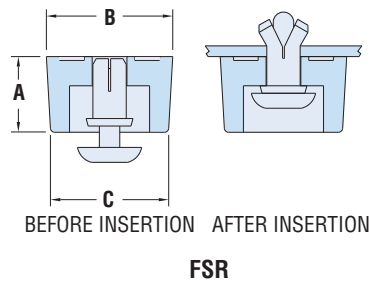

Material: Thermoplastic Rubber (TPR)  
 Flammability Rating: 94-HB  
 Temperature Range: -30°F (-34°C) to 250°F (121°C)

*Quick  
Specs*

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Mounting Fixings](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[5912235-1 REV](#) - [5912235-2](#) [007541](#) [627](#) [M3783-7001](#) [71-074914-006](#) [71-441549-19S](#) [75-69211-3P](#) [75-69214-6P](#) [75-69224-28P](#) [75-69224-5S](#) [75-69232-17S](#) [7717-8DAP](#) [85047GULPT](#) [85054GBEPR](#) [FPK-02-R10](#) [PMS27488-001-01](#) [1-18023-0](#) [H-118-2](#) [D83999/20WC8SN](#) [DB1](#) [1302030464](#) [DC31-14W19PN](#) [DC31-14W19PW](#) [DC31E14-19PX](#) [DC31E14-19PY](#) [DC32-18W32SN](#) [DC36-18-32SW](#) [DC36-18-32SX](#) [DC37-14-19PW](#) [DC37-22-21PX](#) [DC37E14-19PN](#) [DC37E14-19PX](#) [DC37E14-19PY](#) [1302010957](#) [1302263564](#) [1302340393](#) [1404-0016-78](#) [14540](#) [149331-9811](#) [1561-60](#) [1566](#) [1566](#) [17542](#) [HS5659MB98PN](#) [NT20SATT01](#) [201C5058-01-201 REV E](#) [22594-8](#) [KBB-141](#) [915060](#)