



- **Molded from a nylon material which, in the event of a fire, will not burn and will not produce toxic gases.** Also formulated for sunlight resistance. Other Heyco products are available in this material—please consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge (Except HFP-187 glossy finish).
- Lock firmly into panel up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.
- Multiple sizes for use in .187" (4,7 mm) to 2.000" (50,8 mm) diameter holes. Consult Heyco for larger sizes.

## Heyco® Halogen and Phosphorus-Free 94V-0 Hole Plugs

Heat Stabilized • Self Extinguishing • Nontoxic • UV Resistant

Mounting Hole Diameter Range: .187" (4,7 mm) to 2.000" (50,8 mm)

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	PART DIMENSIONS			
in.	mm.			A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.

Single Locking Step for Panel Thickness up to .062" (1,6 mm)

.187	4,7	<b>2593</b>	HFP 187*	.25	6,4	.24	6,1
.250	6,4	<b>2606</b>	HFP 250	.31	7,9		
.312	7,9	<b>2616</b>	HFP 312	.38	9,5	.31	7,9


Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)

.375	9,5	<b>2623</b>	HFP 375	.47	11,9	.41	10,3
.437	11,1	<b>2636</b>	HFP 437	.53	13,5		
.500	12,7	<b>2646</b>	HFP 500	.58	14,7		
.625	15,9	<b>2666</b>	HFP 625	.72	18,2		
.750	19,1	<b>2686</b>	HFP 750	.92	23,4	.45	11,5
.875	22,2	<b>2706</b>	HFP 875	1.02	25,8		
1.000	25,4	<b>2716</b>	HFP 1000	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	<b>2729</b>	HFP 1093	1.22	30,9		
1.250	31,7	<b>2749</b>	HFP 1250	1.38	34,9	.47	11,9
1.375	34,9	<b>2759</b>	HFP 1375	1.50	38,1		
1.500	38,1	<b>2769</b>	HFP 1500	1.69	42,8		
1.750	44,5	<b>2779</b>	HFP 1750	1.92	48,7		
2.000	50,8	<b>2789</b>	HFP 2000	2.17	55,1		


Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

.500	12,7	<b>3004F</b>	HFPT 500	.58	14,7	.56	14,3
.625	15,9	<b>3006F</b>	HFPT 625 *	.73	18,5	.52	13,2
.750	19,1	<b>3008F</b>	HFPT 750 *	.91	23,1	.56	14,3
.875	22,2	<b>3044F</b>	HFPT 875	1.02	25,8		
1.000	25,4	<b>3046F</b>	HFPT 1000	1.20	30,6		
1.093- 1.125	27,8- 28,6	<b>3018F</b>	HFPT 1093	1.22	30,9		
1.250	31,7	<b>3102F</b>	HFPT 1250	1.38	34,9	.58	14,7
1.375	34,9	<b>3106F</b>	HFPT 1375	1.50	38,1		
1.500	38,1	<b>3048F</b>	HFPT 1500	1.67	42,4		
1.750	44,5	<b>3027F</b>	HFPT 1750	1.91	48,4		
2.000	50,8	<b>3050F</b>	HFPT 2000	2.17	55,1		

Standard color black.  
\*Convex, glossy finish head.

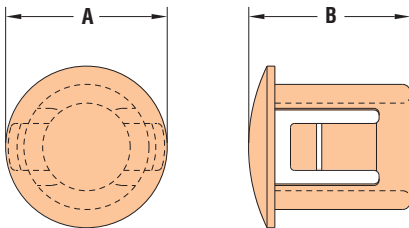

SINGLE PANEL THICKNESS DESIGN

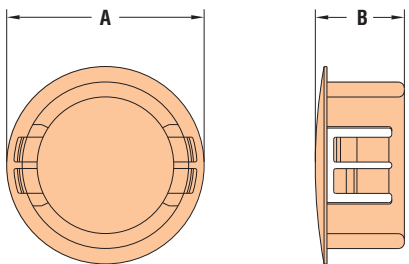

MULTIPLE PANEL THICKNESS DESIGN

Quick  
Specs

Material  
Certifications

Nylon 6/6  
 Recognized under the Component Program of Underwriters' Laboratories File E51579

Flammability Rating  
Temperature Range

Certified by the Canadian Standards Association File 8919  
 94V-0  
 -40°F (-40°C) to 221°F (105°C)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Conduit Fittings & Accessories](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[M3231GAB](#) [M3231GAC](#) [M3231GAE](#) [M3231GL](#) [M3231GN](#) [M3231GT](#) [VC-937-16/RED](#) [VC-562-16/RED](#) [VC-1125-16/RED](#) [DM0240-1/2A](#) [3408B](#) [G6002](#) [M4340GAE](#) [C2016-P](#) [C2012-P](#) [3407B](#) [1660-P](#) [561-87BG11BLK](#) [561-75BG11B](#) [BVNV-P428](#) [BVBV-P366](#) [2276](#) [2663-P](#) [3405B](#) [C2070-P](#) [3582V](#) [4975](#) [2644-P](#) [2955](#) [M50](#) [2404-P](#) [2291](#) [2133-P](#) [3048F](#) [VC12516](#) [RC156-0500](#) [DM0523-1/2A](#) [1035A](#) [DMS0250-1A](#) [DMS0313-1A](#) [1040A](#) [1050A](#) [R1/8A](#) [DMPC0490-1/2A](#) [DMPC0521-1/2A](#) [DMPC0552-1/2A](#) [1070A](#) [R1/2A](#) [E1-7/8B](#) [061A](#) [R3/4A](#)