

“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company



## Heyco® Open/Closed Bushings

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.500" (63,5 mm)



Small Packs Available

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	PACKAGING		PART DIMENSIONS					
in.	mm.			Bulk (Std)	Small Pack*	A Inside Diameter		B Head Diameter		C Overall Height	
Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)											
.375	9,5	<b>2865</b>	OCB 375	20000	100	.27	6,7	.42	10,7	.39	9,9
.437	11,1	<b>2867</b>	OCB 437	15000	100	.33	8,4	.50	12,7	.41	10,3
.500	12,7	<b>2871</b>	OCB 500	20000	100	.31	7,9	.56	14,3		
.512	13,0	<b>2875</b>	OCB 512	20000	100	.35	9,0	.59	14,9		
.562	14,3	<b>2869</b>	OCB 562	15000	100	.39	9,9	.64	16,3		
.625	15,9	<b>2872</b>	OCB 625	8500	100	.45	11,1	.69	17,5		
.650	16,5	<b>2914</b>	OCB 650	8500	100	.48	12,3	.73	18,6		
.750	19,1	<b>2873</b>	OCB 750	10000	100	.55	12,7	.78	19,8		
.866	22,0	<b>2917</b>	OCB 866	7500	100	.68	17,3	.98	24,8		
.875	22,2	<b>2874</b>	OCB 875	7500	100	.67	17,0	.92	23,4		
.984	25,0	<b>2920</b>	OCB 984	4000	100	.79	20,1	1.04	26,4		
1.000	25,4	<b>2878</b>	OCB 1000	4000	50	.80	20,3	1.05	26,6		
1.093	27,8	<b>2879</b>	OCB 1093	4000	50	.88	20,6	1.16	29,4		
1.250	31,8	<b>2881</b>	OCB 1250	5000	50	1.05	25,8	1.34	34,1		
1.375	34,9	<b>2882</b>	OCB 1375	2500	50	1.17	29,8	1.47	37,3		
1.500	38,1	<b>2883</b>	OCB 1500	2500	25	1.25	31,8	1.58	40,1	.42	10,7
2.000	50,8	<b>2900</b>	OCB 2000	2000	25	1.73	43,9	2.12	53,9		
Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)											
2.500	63,5	<b>2909</b>	OCB 2.5	500	10	2.00	50,8	2.60	66,0	.72	18,3

Standard color black. Consult Heyco for white and other colors.

\*To order Small Packs, please add the suffix -P to Part No., e.g., 2865-P

- Split design allows side entry and encirclement of preassembled harnesses, capillary tubes, computer cables, power cords, or other assemblies that have segments larger than the bushing's I.D.
- May also be assembled into holes that already contain cable, wire or other filaments.
- Fingertip pressure snap-locks the bushing into its mounting hole.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Multiple sizes for use in mounting holes from .375" (9,5 mm) to 2.500" (63,5 mm).

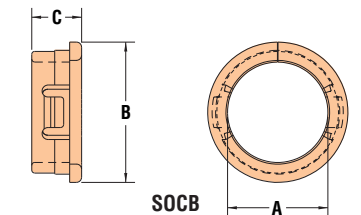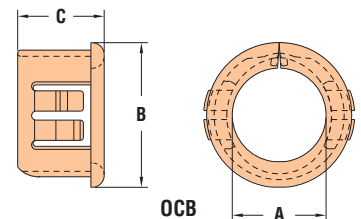

## Heyco® Open/Closed Shorty Bushings

Single Locking Step for Panel Thickness up to .062" (1,6 mm)

Mounting Hole Diameter Range: 7,0 mm (.276") 27,0 mm (1.063")

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	PART DIMENSIONS					
in.	mm.			A Inside Diameter	B Head Diameter		C Overall Height		
.276	7,0	<b>2934</b>	SOCB 07M	.22	5,6	.35	8,9	.24	6,0
.512	13,0	<b>2938</b>	SOCB 13M	.38	9,7	.56	14,2	.25	6,4
.630	16,0	<b>2941</b>	SOCB 16M	.52	13,2	.71	18,0		
.748	19,0	<b>2943</b>	SOCB 19M	.63	16,0	.83	21,1		
.866	22,0	<b>2945</b>	SOCB 22M	.75	19,1	.98	24,9		
.945	24,0	<b>2947</b>	SOCB 24M	.82	20,8	1.06	26,9		
1.063	27,0	<b>2950</b>	SOCB 27M	.95	24,8	1.13	28,7		

Standard color black. Consult Heyco for white and other colors.

- For use in panels .062" (1,6 mm) and thinner.
- Lower overall height protrudes less through thin mounting panels; thus Shorty Open/Closed Bushings occupy less "real estate" inside your application.
- Split design allows side entry and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- May also be assembled into holes that already contain cable, wire or other filaments.
- Fingertip pressure snap-locks the bushing into its mounting hole.

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331 Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-4°F (-18°C) to 221°F (105°C)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Grommets & Bushings](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[M10-036565-101](#) [M10-036565-143](#) [M10-036565-183](#) [M10-036565-244](#) [M10-036565-122](#) [M10-036565-163](#) [M10-036565-232](#) [HSS-M32-TPE-V0](#) [NSYTS AKFL](#) [SP-16 TPE](#) [SP-20 TPE](#) [SK 8-13 TPE](#) [4014B](#) [2407](#) [ALBCBS36025](#) [2141-P](#) [HTL-40-10-TPE](#) [634430090](#) [2417-P](#) [2917-P](#) [3108-P](#) [2871-P](#) [1342664](#) [100187](#) [100188](#) [100216](#) [100223](#) [100236](#) [52001970](#) [52001980](#) [52002010](#) [52002020](#) [52002050](#) [VG-1](#) [FEM 27-35](#) [100175](#) [100176](#) [100178](#) [100182](#) [100196](#) [100238](#) [100244](#) [100744](#) [100084](#) [100174](#) [100177](#) [100179](#) [100180](#) [100181](#) [100186](#)