



Heyco® Open/Closed Bushings


Mounting Hole Diameter Range: .375" (9,5 mm) to 2.500" (63,5 mm)

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	PART DIMENSIONS					
in.	mm.			A Inside Diameter		B Head Diameter		C Overall Height	
		Black		in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)									
.375	9,5	2865	OCB 375	.265	6,7	.421	10,7	.390	9,9
.437	11,1	2867	OCB 437	.330	8,4	.500	12,7	.406	10,3
.500	12,7	2871	OCB 500	.312	7,9	.562	14,3		
.562	14,3	2869	OCB 562	.390	9,9	.640	16,3		
.625	15,9	2872	OCB 625	.453	11,1	.687	17,5		
.750	19,1	2873	OCB 750	.546	12,7	.782	19,8		
.875	22,2	2874	OCB 875	.671	14,3	.921	23,4		
1.000	25,4	2878	OCB 1000	.812	19,1	1.047	26,6		
1.093	27,8	2879	OCB 1093	.875	20,6	1.156	29,4		
1.250	31,8	2881	OCB 1250	1.046	25,8	1.343	34,1		
1.375	34,9	2882	OCB 1375	1.171	25,4	1.468	37,3		
1.500	38,1	2883	OCB 1500	1.250	26,9	1.578	40,1	.421	10,7
2.000	50,8	2900	OCB 2000	1.730	43,9	2.120	53,9		
Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)									
2.500	63,5	2909	OCB 2.5	2.000	50,8	2.600	66,0	.720	18,3

NEW!

NEW!

Standard color black. Consult Heyco for white and other colors.

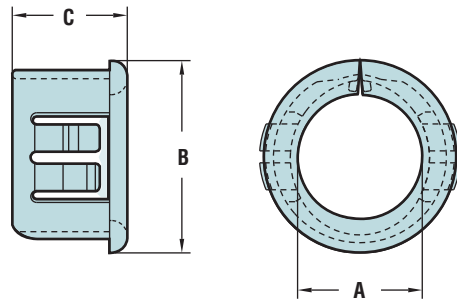

Material Nylon 6/6
Certifications Recognized under the Component Program of Underwriters' Laboratories File E15331
 Certified by the Canadian Standards Association File 8919
Flammability Rating 94V-2
Material Temperature Index 257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Grommets & Bushings](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[M10-036565-101](#) [M10-036565-143](#) [M10-036565-183](#) [205339-4](#) [M10-036565-122](#) [M10-036565-163](#) [3-1991136-0](#) [561-FGUP0850B](#) [561-MP13716](#) [561-FGUP0400N](#) [1398081-1](#) [1301800320](#) [M10-036565-232](#) [2298](#) [2407](#) [2141-P](#) [HTL-40-10-TPE](#) [2417-P](#) [2917-P](#) [3108-P](#) [2871-P](#) [100187](#) [100188](#) [100216](#) [100223](#) [100236](#) [52001970](#) [52002000](#) [52002010](#) [52002020](#) [52002050](#) [1301800412](#) [FEM 27-35](#) [100175](#) [100176](#) [100178](#) [100182](#) [100196](#) [100238](#) [100244](#) [100744](#) [100084](#) [100174](#) [100177](#) [100179](#) [100180](#) [100181](#) [100186](#) [100721](#) [103584](#)