




## Heyco® Wire Connectors

- Quick, permanent and secure installation with recommended crimp tool.
- Five sizes for #10 AWG thru #22 AWG.
- UL rated at 600 volts except as noted.
- Closed-end nylon shell with plated copper internal sleeve.

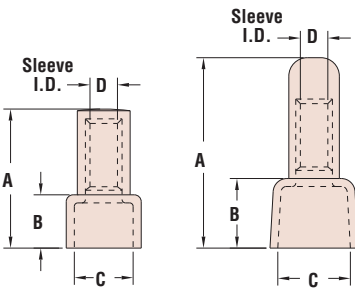

**Part No. 2988\*\***  
Features Extra Clearance Beyond Sleeve.

WIRE COMBINATIONS (AWG)	PART NO.	DESCRIPTION	USE CRIMP TOOL	PART DIMENSIONS							
				A		B		C		D	
				in.	mm.	in.	mm.	in.	mm.	in.	mm.


### Crimp-On

JOINS: 1#16 & 1#20 Thru 2-5#22	<b>2986</b>	1622N	0992 (YS-7)	.60	15,2	.23	5,9	.24	6,2	.09	2,4
JOINS: 1#14 & 1#18 Thru 2-7#22	<b>2988**</b>	1422DN	0992 (YS-7)	.83	21,1	.31	7,9	.33	8,4	.12	3,0
JOINS: 1#14 & 1#18 Thru 2-7#22	<b>2990</b>	1422N	0992 (YS-7)	.60	15,2	.23	5,9	.26	6,5		
JOINS:* 1#10 & 1#14 Thru 4#20	<b>2992</b>	1022N	0992 (YS-7)	.70	17,1	.32	8,0	.37	9,4	.16	4,0
JOINS:* 1#10&1#12 Thru 4#16	<b>2994</b>	1020N	n/a	.87	22,2	.40	10,2	.47	12,0	.20	5,1

### Color Coded

### Color

JOINS #22 Thru #14 Min. 3#22 Max. 2#16	<b>2937</b>	81-G	Gray	.57	14,5	.33	8,4
JOINS #22 Thru #14 Min. 3#20 Max. 3#16	<b>2940</b>	82-B	Blue	.70	17,8	.39	9,9
JOINS #22 Thru #14 Min. 2#18 Max. 2#14	<b>2949</b>	83-O	Orange	.84	21,3	.45	11,4
JOINS #22 Thru #10 Min. 3#20 Max. 2#12	<b>2952</b>	84-Y	Yellow	.94	23,9	.54	13,7
JOINS #20 Thru #8 Min. 2#14 Max. 4#12	<b>2955</b>	86-R	Red	1.05	26,7	.64	16,3



- Gray, Blue, Orange, Yellow, and Red colors for easy size and capacity identification.
- Square wire spring insert bites into and securely connects #10 AWG thru #22 AWG.
- Fluted body for easy assembly.
- 81-G and 82-B UL rated 300 volts.
- 83-O and 84-Y UL rated at 600 volts.

\*Only suitable for stranded #10 AWG (6,0 mm) wire.

\*\*Extra clearance beyond sleeve.

*Quick Specs*

Materials	Crimp-On – Nylon 6/6 and brass	Color Coded – Polypropylene and steel
Certifications	UL Listed under Underwriters' Laboratories File E80121	CS Certified by the Canadian Standards Association File 211101 (Color Coded only)
Flammability Rating	Crimp-On – 94V-0	Color Coded – 94V-2
Temperature Range	-4°F (-18°C) to 221°F (105°C)	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [62149-1](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#) [M55155/29-5S](#) [M55155/29XJ08](#)