




# Heyco® Thick Panel Snap Bushings

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.0" (50,8 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
in.	mm.	Black	White		A Inside Diameter		B Head Diameter		C Overall Height	
					in.	mm.	in.	mm.	in.	mm.
<b>Single Locking Step for Panel Thickness up to .170" (4,3 mm)</b>										
.375	9,5	2017	2018	SB 375-281	.281	7,1	.468	11,9	.406	10,3
1.000	25,4	3085	3088	SBT 1000-790*	.790	20,1	1.130	28,8	.450	11,4
<b>Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)</b>										
.500	12,7	3126	3127	SBT 500-6	.391	9,9	.578	14,7	.562	14,3
.625	15,9	2830	2831	SB 625-500**	.500	12,7	.703	17,9	.531	13,5
.750	19,1	2840	2841	SB 750-625**	.625	15,9	.828	21,0		
.875	22,2	3104	3105	SBT 875-11	.687	17,5	.953	24,2		
1.000	25,4	3108	3109	SBT 1000-12	.766	19,4	1.125	28,6	.562	14,3
1.093-1.125	27,8-28,6	3128	3129	SBT 1093-15	.937	23,8	1.218	30,9		
1.187	30,2	3130	3131	SBT 1187-15	.937	23,8	1.312	33,3		
1.250	31,8	3132	3133	SBT 1250-16	1.000	25,4	1.310	33,2		
1.375	34,9	3110	3111	SBT 1375-16	1.000	25,4	1.500	38,1		
1.500	38,1	3112	3113	SBT 1500-21	1.312	33,3	1.620	41,2		
1.750	44,5	3114	3115	SBT 1750-22	1.375	34,9	1.875	47,6		
2.000	50,8	3116	3117	SBT 2000-26	1.625	41,3	2.125	54,0		

- For use in mounting panels up to 1/4" thick.
- Converts raw-edged holes to smooth, neat, insulated holes.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstands a push back force of >35 pounds.
- Available in multiple sizes for use in .375" (9,5 mm) to 2.0" (50,8 mm) diameter holes.

Standard color black. Consult Heyco for white and other colors.  
 \*Notched head, triple locking finger design.  
 \*\*Single Locking Step for Panel Thickness up to .250" (6,4 mm).

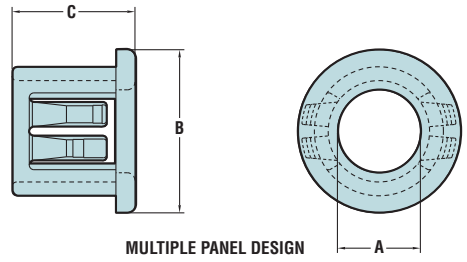

MULTIPLE PANEL DESIGN

**Material** Nylon 6/6

**Certifications** Recognized under the Component Program of Underwriters' Laboratories, File E15331  
 Certified by Canadian Standards Association, File 8919

**Flammability Rating** 94V-2

**Material Temperature Index** 257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Grommets & Bushings](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[M10-036565-101](#) [M10-036565-143](#) [M10-036565-183](#) [205339-4](#) [M10-036565-122](#) [M10-036565-163](#) [3-1991136-0](#) [561-FGUP0850B](#) [561-MP13716](#) [561-FGUP0400N](#) [1398081-1](#) [1301800320](#) [M10-036565-232](#) [2298](#) [2407](#) [2141-P](#) [HTL-40-10-TPE](#) [2417-P](#) [2917-P](#) [3108-P](#) [2871-P](#) [100187](#) [100188](#) [100216](#) [100223](#) [100236](#) [52001970](#) [52002000](#) [52002010](#) [52002020](#) [52002050](#) [1301800412](#) [FEM 27-35](#) [100175](#) [100176](#) [100178](#) [100182](#) [100196](#) [100238](#) [100244](#) [100744](#) [100084](#) [100174](#) [100177](#) [100179](#) [100180](#) [100181](#) [100186](#) [100721](#) [103584](#)