





- For clamping cable or tubing securely into place.
- Resist corrosion, salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL certification or testing.)
- All parts are size marked in inches and millimeters.
- Standard material Nylon 6/6. 94V-0 available, consult Heyco.
- For Snap Rivets compatible with Heyco Cable Clamps, see the table on page 7-35.

## Heyco® Nylon Cable Clamps

MOUNTING HOLE DIAMETER		SCREW SIZE	PART DIMENSION A		PART NO.		DESCRIPTION			
in.	mm.		in.	mm.	Black	Natural				
<b>Light Duty - 3/8" (9,5 mm) wide, .05" (1,3 mm) thick</b>										
.170	4,3	8	.125	3,2	<b>3362</b>	<b>3312</b>	CCL 125-170			
			.187	4,7	<b>3363</b>	<b>3313</b>	CCL 187-170			
			.250	6,3	<b>3364</b>	<b>3314</b>	CCL 250-170			
			.312	7,9	<b>3365</b>	<b>3315</b>	CCL 312-170			
			.375	9,5	<b>3366</b>	<b>3316</b>	CCL 375-170			
			.437	11,1	<b>3367</b>	<b>3317</b>	CCL 437-170			
.203	5,2	10	.500	12,7	<b>3368</b>	<b>3318</b>	CCL 500-170			
			<b>Heavy Duty - 1/2" (12,7 mm) wide, .06" (1,5 mm) thick</b>							
			.203	5,2	10	.125	3,2	<b>3372</b>	<b>3322</b>	CCH 1/8
						.187	4,7	<b>3373</b>	<b>3323</b>	CCH 3/16
						.250	6,3	<b>3374</b>	<b>3324</b>	CCH 1/4
						.312	7,9	<b>3375</b>	<b>3325</b>	CCH 5/16
.375	9,5	<b>3376</b>				<b>3326</b>	CCH 3/8			
.437	11,1	<b>3377</b>				<b>3327</b>	CCH 7/16			
.500	12,7	<b>3378</b>				<b>3328</b>	CCH 1/2			
.562	14,3	<b>3379</b>				<b>3329</b>	CCH 9/16			
.625	15,9	<b>3380</b>				<b>3330</b>	CCH 5/8			
.687	17,4	<b>3381</b>				<b>3331</b>	CCH 11/16			
.750	19,1	<b>3382</b>				<b>3332</b>	CCH 3/4			
.812	20,6	<b>3383</b>				<b>3333</b>	CCH 13/16			
.875	22,2	<b>3384</b>				<b>3334</b>	CCH 7/8			
1.000	25,4	<b>3390</b>				<b>3340</b>	CCH 1			
1.125	28,6	<b>3392</b>				<b>3342</b>	CCH 1-1/8			
1.187	30,1	<b>3393</b>				<b>3343</b>	CCH 1-3/16			
1.250	31,8	<b>3394</b>				<b>3344</b>	CCH 1-1/4			
1.375	34,9	<b>3396</b>				<b>3346</b>	CCH 1-3/8			
1.500	38,1	<b>3398</b>				<b>3348</b>	CCH 1-1/2			

Standard colors black and natural.

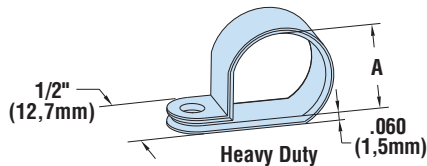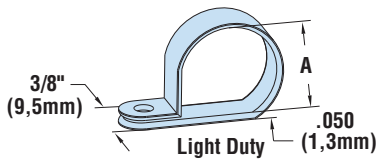

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E54523
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 221°F (105°C) - Black 32°F (0°C) to 185°F (85°C) - Natural

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Mounting & Accessories](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[582603-1](#) [009333-000](#) [727844N003](#) [747](#) [809090N001](#) [843188-000](#) [8666](#) [967279N002](#) [DB-11](#) [1300840039](#) [1300900096](#) [1301800416](#)  
[1302264450](#) [1300830184](#) [1300830729](#) [1300900039](#) [1301580036](#) [1301850553](#) [1301860939](#) [1302000074](#) [1302261315](#) [1302264431](#)  
[1337706-2](#) [APA18-AK](#) [1724](#) [1-787307-1](#) [185491N001](#) [1868](#) [HP-6N](#) [C-202-C](#) [202C221-13-0](#) [CA7308-000](#) [8S23-75FR-CS8184](#) [2684](#) [9648](#)  
[3089](#) [988382-000](#) [A72821-000](#) [AA401](#) [173506-000](#) [202C292-13-0](#) [202C302-13-0](#) [2109](#) [300625](#) [3330](#) [3412](#) [M9142](#) [M9143](#) [529732-000](#)  
[561-50D1187](#)