



Heyco® Double D Hole Plugs

For Mounting Holes with Flats


Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
C Mounting Hole Dia.		D To Prevent Rotation		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
.375	9,5	.345	8,8	2617	2618	DP 375*	.468	11,9	.406	10,3
.437	11,1	.390	9,9	2488	2489	DD 437-390	.531	13,5		
.500	12,7	.445	11,3	2491	2492	DD 500-445	.554	14,7		
.562	14,3	.530	13,5	2494	2495	DD 562-530	.656	16,7		
.625	15,9	.550	14,0	2497	2498	DD 625-550	.728	18,5		
.750	19,1	.625	15,9	2503	2504	DD 750-625	.921	23,4		
.875	22,2	.770	19,5	2509	2510	DD 875-770	1.016	25,8	.453	11,5
				2511	-	DD 875-770-9**	.938	23,8		
1.109	28,2	1.000	25,4	2717	2718	DD 1109-1000	1.218	30,9		
2.000	50,8	1.875	47,6	2959	2963	DD 2000-1875	2.170	55,1	.478	12,1

Standard colors black and white. Consult Heyco for other colors.

*On installation, DP 375 Locking Fingers must be aligned with Mounting Hole Flats.

**Smaller than standard Head Diameter, for clearance situations.

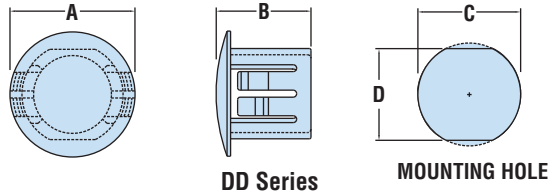


- Close unwanted Strain Relief mounting holes or other double faced or Double D holes punched or molded with two opposing flats.
- Convex, matte finish head tapers to a thin edge.
- Quick and easy installation.
- Lock firmly in panels up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.

Heyco® Rectangular Blanking Plugs

Maximum Thickness	PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS				
	C Mounting Hole Length		D Mounting Hole Width				Black	A Head Dimensions		B Overall Height	
in.	mm.	in.	mm.	in.	mm.		in.	mm.	in.	mm.	
.04	1,0	.27	6,9	.29	7,4	2512	RP 69-74*	.37 x .37	9,4 x 9,4	.330	8,4
NEW! .14	3,5	.37	9,5	.51	13,0	3388	RP 95-130	.46 x .87	11,8 x 22	.41	10,5
				1.02	26,0	3389	RP 95-260	.46 x 1.38	11,8 x 35		
.10	2,5	.45	11,5	.51	13,9	1890	RP 115-139	.58 x .58	14,7 x 14,7	.40	10,2
.16	4,0	.69	17,5	.69	17,5	1892	RP 175-175	.83 x .83	21,1 x 21,1	.47	11,9

Standard color black. Consult Heyco for other colors. *Single locking step for Panel Thickness up to .04" (1,0 mm).

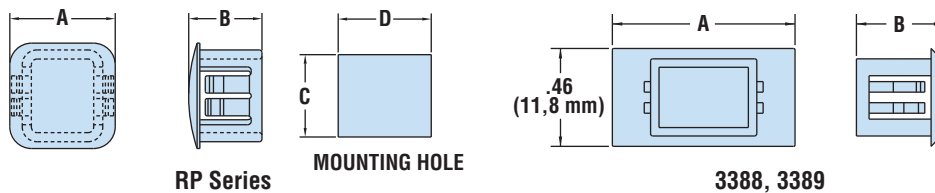

- Fill uniquely sized panel holes.
- Blank unused rectangular panel holes.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Consult Heyco for other sizes. Our Axccl Rapid Response team is ready to meet your design requirements.
- **PN 1890** - UR Recognized under the Component Program of Underwriters' Laboratories File E15331.
- **PN 1892** - UR Recognized under the Component Program of Underwriters' Laboratories File E51579 and CSA Certified by the Canadian Standards Association File 8919.



Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriter Laboratories File E51579 (DD only)
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Mounting & Accessories](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[582603-1](#) [009333-000](#) [727844N003](#) [747](#) [809090N001](#) [843188-000](#) [8666](#) [967279N002](#) [DB-11](#) [1300840039](#) [1300900096](#) [1301800416](#)
[1302264450](#) [1300830184](#) [1300830729](#) [1300900039](#) [1301580036](#) [1301850553](#) [1301860939](#) [1302000074](#) [1302261315](#) [1302264431](#)
[1337706-2](#) [APA18-AK](#) [1724](#) [1-787307-1](#) [185491N001](#) [1868](#) [HP-6N](#) [C-202-C](#) [202C221-13-0](#) [CA7308-000](#) [8S23-75FR-CS8184](#) [2684](#) [9648](#)
[3089](#) [988382-000](#) [A72821-000](#) [AA401](#) [173506-000](#) [202C292-13-0](#) [202C302-13-0](#) [2109](#) [300625](#) [3330](#) [3412](#) [M9142](#) [M9143](#) [529732-000](#)
[561-50D1187](#)