

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

Heyco® -Tite Brass Liquid Tight Cordgrips

Straight-Thru, Metric Hubs

The Ultimate in Liquid Tight Strain Relief Protection



CABLE DIA. RANGE				PART NO.	THREAD SIZE	UL or RA	PART DIMENSIONS								
Minimum		Maximum					A		B		C		D		
in.	mm.	in.	mm.				Clearance Hole Dia.	in.	mm.	Max. O.A. Length	in.	mm.	Thread Length	in.	mm.


Standard Thread																	
.079	2,0	.098	2,5	4500	M6 x 1	cULUS	.236	6,0	.79	20,0	.32	8,0	.32	8,0			
.098	2,5	.118	3,0	4501													
.118	3,0	.138	3,5	4502													
.098	2,5	.138	3,5	4503	M8 x 1,25	cULUS	.315	8,0	.94	24,0	.39	10,0	.43	11,0			
.138	3,5	.197	5,0	4504													
.118	3,0	.157	4,0	4505	M10 x 1,5	cULUS	.394	10,0	.98	25,0	.39	10,0	.51	13,0			
.157	4,0	.236	6,0	4506													
.138	3,5	.197	5,0	4507	M12 x 1,5	cULUS	.472	12,0	1.06	27,0	.39	10,0	.59	15,0			
.197	5,0	.256	6,5	4508													
.256	6,5	.315	8,0	4509													
.138	3,5	.177	4,5	4510	M16 x 1,5	cULUS	.630	16,0	1.18	30,0	.39	10,0	.71	18,0			
.177	4,5	.236	6,0	4511													
.236	6,0	.315	8,0	4512													
.315	8,0	.413	10,5	4513	M16 x 1,5	cULUS	.630	16,0	1.26	32,0							
.236	6,0	.315	8,0	4514	M20 x 1,5	cULUS	.787	20,0	1.22	31,0	.39	10,0	.94	24,0			
.315	8,0	.433	11,0	4515													
.433	11,0	.591	15,0	4516	M20 x 1,5	cULUS	.787	20,0	1.30	33,0							
.374	9,5	.492	12,5	4517	M25 x 1,5	cULUS	.984	25,0	1.42	36,0							
.492	12,5	.630	16,0	4518	M25 x 1,5	cULUS	.984	25,0	1.50	38,0	.43	11,0	1.18	30,0			
.630	16,0	.807	20,5	4519	M25 x 1,5	cULUS	.984	25,0	1.54	39,0							
.551	14,0	.669	17,0	4520	M32 x 1,5	cULUS	1.260	32,0	1.61	41,0	.51	13,0	1.42	36,0			
.669	17,0	.827	21,0	4521													
.827	21,0	1.003	25,5	4522													
.787	20,0	.945	24,0	4523	M40 x 1,5	cULUS	1.574	40,0	1.73	44,0	.51	13,0	1.81	46,0			
.945	24,0	1.122	28,5	4524													
1.122	28,5	1.299	33,0	4525													
1.142	29,0	1.299	33,0	4526	M50 x 1,5	cULUS	1.968	50,0	1.89	48,0	.55	14,0	2.17	55,0			
1.299	33,0	1.457	37,0	4527													
1.457	37,0	1.654	42,0	4528													

Standard Thread, High Temperature*																
.630	16,0	.807	20,5	4612	M25 x 1,5	cULUS	.984	25,0	1.54	39,0	.43	11,0	1.18	30,0		

Short Thread																	
.079	2,0	.098	2,5	14500	M6 x 1	cULUS	.236	6,0	.67	17,0	.20	5,0	.32	8,0			
.098	2,5	.118	3,0	14501													
.118	3,0	.138	3,5	14502													
.098	2,5	.138	3,5	14503	M8 x 1,25	cULUS	.315	8,0	.75	19,0	.20	5,0	.43	11,0			
.138	3,5	.197	5,0	14504													
.118	3,0	.157	4,0	14505	M10 x 1,5	cULUS	.394	10,0	.79	20,0	.20	5,0	.51	13,0			
.157	4,0	.236	6,0	14506													
.138	3,5	.197	5,0	14507	M12 x 1,5	cULUS	.472	12,0	.87	22,0	.20	5,0	.59	15,0			
.197	5,0	.256	6,5	14508													
.256	6,5	.315	8,0	14509													
.138	3,5	.177	4,5	14510	M16 x 1,5	cULUS	.630	16,0	.98	25,0	.20	5,0	.71	18,0			
.177	4,5	.236	6,0	14511													
.236	6,0	.315	8,0	14512													
.315	8,0	.413	10,5	14513	M16 x 1,5	cULUS	.630	16,0	1.06	27,0							
.236	6,0	.315	8,0	14514	M20 x 1,5	cULUS	.787	20,0	1.06	27,0	.24	6,0	.94	24,0			
.315	8,0	.433	11,0	14515													
.433	11,0	.591	15,0	14516	M20 x 1,5	cULUS	.787	20,0	1.14	29,0							
.374	9,5	.492	12,5	14517	M25 x 1,5	cULUS	.984	25,0	1.26	32,0							
.492	12,5	.630	16,0	14518	M25 x 1,5	cULUS	.984	25,0	1.34	34,0	.28	7,0	1.18	30,0			
.630	16,0	.807	20,5	14519	M25 x 1,5	cULUS	.984	25,0	1.38	35,0							
.551	14,0	.669	17,0	14520	M32 x 1,5	cULUS	1.260	32,0	1.42	36,0	.31	8,0	1.42	36,0			
.669	17,0	.827	21,0	14521													
.827	21,0	1.003	25,5	14522													

Short Thread, High Temperature*																
.240	6,1	.413	10,5	4696	M16 x 1,5	cULUS	.629	16,0	1.06	27,0	.20	5,0	.71	18,0		
.315	8,0	.591	15,0	4699	M20 x 1,5	cULUS	.787	20,0	1.14	29,0	.24	6,0	.94	24,0		

- Nickel plated brass construction for superior protection of flexible cables.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- IP 68 rated.
- For use in clearance or threaded holes.
- Meets the New European standard EN 50262 version A for metric cordgrips.
- Long metric threads provide additional threads for easy locknut assembly.
- Multiple sizes for flexible cord diameters ranging from .079" (2,0 mm) to 1.654" (42,0 mm).
- We recommend using the smallest cordgrip that accommodates your cable size.
- Sealing gland is molded in Thermoplastic Polymer Elastomer (TPE) Material.
- Locknuts not included. For metal locknut specifications or to order locknuts separately, see page 3-48.
- See page 3-35 for Quick Specs.
- DFARS Compliant

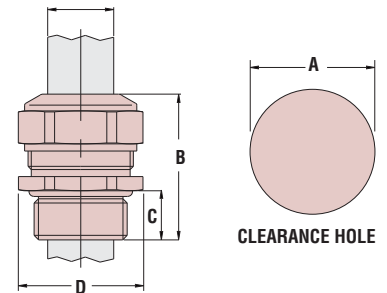

* Special sealing gland rated to 200°C (392°F). Consult Heyco for other High Temperature rated sizes.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Mounting & Accessories](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[582603-1](#) [009333-000](#) [727844N003](#) [747](#) [809090N001](#) [843188-000](#) [8666](#) [967279N002](#) [DB-11](#) [1300840039](#) [1300900096](#) [1301800416](#)
[1302264450](#) [1300830184](#) [1300830729](#) [1300900039](#) [1301580036](#) [1301850553](#) [1301860939](#) [1302000074](#) [1302261315](#) [1302264431](#)
[1337706-2](#) [APA18-AK](#) [1724](#) [1-787307-1](#) [185491N001](#) [1868](#) [HP-6N](#) [C-202-C](#) [202C221-13-0](#) [CA7308-000](#) [8S23-75FR-CS8184](#) [2684](#) [9648](#)
[3089](#) [988382-000](#) [A72821-000](#) [AA401](#) [173506-000](#) [202C292-13-0](#) [202C302-13-0](#) [2109](#) [300625](#) [3330](#) [3412](#) [M9142](#) [M9143](#) [529732-000](#)
[561-50D1187](#)