




Heyco-Flex™ Quick Twist Conduit Fittings

For use with Heyco-Flex™ II Tubing
Straight-Thru, Snap-In Hubs

- One-piece solution with smooth internal surfaces provides for easier wire routing, protection, and installation.
- Unique locking fingers accommodate various panel thicknesses.
- Snap-in Fittings are UL recognized for use with Heyco-Flex II tubing. See page 2-2.
- Easy, permanent assembly: the installer twists the tubing over the connector ferrule.
- All nylon construction is resistant to salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL certification and testing.)
- Suitable for a wide array of electrical applications:
 - Commercial and Industrial HVAC Systems
 - Motorized Equipment
 - Enclosed Power Sources
 - Garage Door Openers
 - Major Appliances
- Dry location only.
- Finishing collars available to neaten rough cut tubing ends.
- **Assembly Tool** available for assembling Quick Twist Fittings into HF1 and HF2 Conduit and Tubing. See page 2-8.

FITS TUBING TRADE SIZE	PART NO.			DESCRIPTION	PART DIMENSIONS									
	Black	Black w/ Finishing Collar*	Gray		A Mounting Hole Dia.		B Overall Length		C Body Length		D Wrenching Nut Thickness		E Wrenching Nut Flat Size	
					in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/4	8515	—	8516	HFC 1/4-S-Twist	.540	13,7	1.33	33,8	.34	8,7	.09	2,3	.75	19,1
3/8	8485	8485FC	8486	HFC 3/8-S-Twist	.875	22,2	1.38	35,0	.39	9,9	.09	2,3	1.00	25,4
1/2	8490	8490FC	8491	HFC 1/2-S-Twist										
3/4	8495	8495FC	8496	HFC 3/4-S-Twist	1.093	27,8	1.50	38,0	.39	9,9	.09	2,3	1.25	31,8

Standard colors black and gray.
*Collar not assembled.

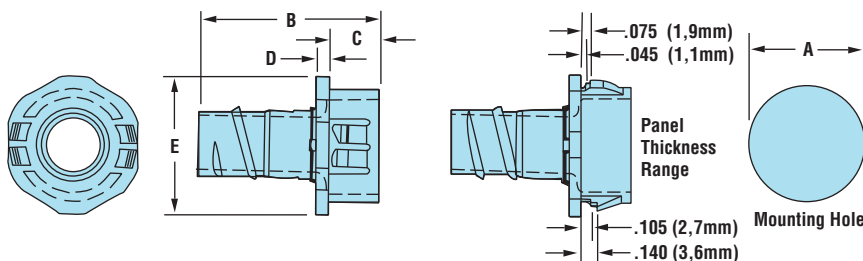

Heyco-Flex™ Quick Twist Finishing Collars

For use with Heyco-Flex™ I and II Quick Twist Conduit Fittings



FITS CONDUIT/ TRADE SIZE	PART NO.		DESCRIPTION
	Black	Gray	
3/8	8474	8482	HFC TWIST 3/8 COLLAR
1/2	8475	8483	HFC TWIST 1/2 COLLAR
3/4	8476	8484	HFC TWIST 3/4 COLLAR

Standard colors black and gray. Consult Heyco for other colors.
(Not available in 1/4”).

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E121095
Flammability Rating	94V-2
Temperature Range	-22°F (-30°C) to 221°F (105°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Conduit Fittings & Accessories](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[M3231GAB](#) [M3231GAC](#) [M3231GAE](#) [M3231GL](#) [M3231GN](#) [M3231GT](#) [VC-937-16/RED](#) [VC-562-16/RED](#) [VC-1125-16/RED](#) [DM0240-1/2A](#) [3408B](#) [G6002](#) [M4340GAE](#) [C2016-P](#) [C2012-P](#) [3407B](#) [1660-P](#) [561-87BG11BLK](#) [561-75BG11B](#) [BVNV-P428](#) [BVBV-P366](#) [2276](#) [2663-P](#) [3405B](#) [C2070-P](#) [3582V](#) [4975](#) [2644-P](#) [2955](#) [M50](#) [2404-P](#) [2291](#) [2133-P](#) [3048F](#) [VC12516](#) [RC156-0500](#) [DM0523-1/2A](#) [1035A](#) [DMS0250-1A](#) [DMS0313-1A](#) [1040A](#) [1050A](#) [R1/8A](#) [DMPC0490-1/2A](#) [DMPC0521-1/2A](#) [DMPC0552-1/2A](#) [1070A](#) [R1/2A](#) [E1-7/8B](#) [061A](#) [R3/4A](#)