

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

Heyco® -Tite Metallic Liquid Tight Cordgrips

Straight-Thru, NPT Hubs

The Ultimate in Liquid Tight Strain Relief Protection




CABLE DIA. RANGE				PART NO.	DESC.	Gland Color	NPT HUB SIZE	PART DIMENSIONS											
Minimum		Maximum						A	B	C	D	E	Clearance Hole Dia.		Sealing Nut HEX		Body Nut O.D.		Overall Length*
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
Steel																			
.150	3,8	.250	6,3	9760	CG 50A-250	Red													
.250	6,3	.350	8,9	9761	CG 50A-350	White													
.350	8,9	.450	11,4	9762	CG 50A-450	Blue	1/2	.875	22,2	1.031	26,2	.937	23,8	1.312	33,3	.812	20,6		
.450	11,4	.550	14,2	9763	CG 50A-560	Green													
.550	14,0	.650	16,5	9764	CG 50A-650	Brown													
.150	3,8	.250	6,3	9766	CG 75A-250	Red													
.250	6,3	.350	8,9	9767	CG 75A-350	White													
.350	8,9	.450	11,4	9769	CG 75A-450	Blue	3/4	1.109	28,2	1.031	26,2	1.172	29,8	1.312	33,3	.812	20,6		
.450	11,4	.550	14,2	9770	CG 75A-560	Green													
.550	14,0	.650	16,5	9771	CG 75A-650	Brown													
.650	16,5	.750	19,0	9772	CG 75B-750	Yellow	3/4	1.109	28,2	1.250	31,7	1.187	31,2	1.562	39,7	1.031	26,2		
.750	19,0	.850	21,6	9773	CG 75B-850	Purple													
Zinc Die-Cast																			
.190	4,8	.250	6,3	9776	CG 11														
.260	6,6	.375	9,5	9777	CG 12	N/A	1/2	.875	22,2	1.00	25,4	.94	23,8	1.20	30,5	.80	20,3		
.375	9,5	.450	11,4	9778	CG 13														

*May vary slightly depending on cable diameter.

Steel:

- Zinc plated steel construction for superior protection of flexible cables.
- Compact design allows fittings to be consecutively ganged—no skipping knockouts—and occupy less real estate.
- Galvanized steel pressure ring prevents distortion of the grommet when the sealing nut is tightened.
- Neoprene rubber grommet ensures a permanent rain-tight seal around the cable.
- Body and sealing nut are made of corrosion resistant machined steel. Zinc plated with special brighteners for an attractive finish.
- Color coded label system identifies the cordgrips by wire range/grommet opening.
- For use in clearance or threaded holes.
- Multiple cable sizes with 1/2" to 3/4" NPT hubs, cover a flexible cord diameter range of .150" (3,8 mm) to .850" (21,6 mm).
- Temperature Rating: 221°F (105°C).
- DFARS Compliant

Steel

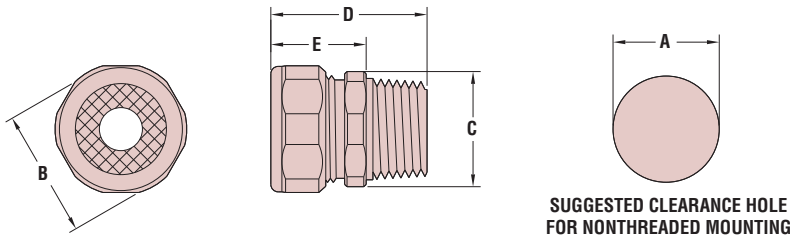

Zinc Die-Cast



Zinc Die-Cast:

- Zamac #3 construction for protection of flexible cables.
- For use in clearance or threaded holes.
- We recommend using the smallest maximum diameter range cordgrip that will fit your application.
- Temperature Rating: 140°F (60°C).
- DFARS Compliant

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[1218](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [915](#) [300623](#) [5632NM](#) [1124](#) [1151](#) [561-MP6P4WH](#) [5534M](#) [9000005073](#) [52104486](#)
[5315817](#) [N16 025 0112 1](#) [N16 020 0112 1](#) [M6106](#) [7422](#) [NG-9516 Gasket](#) [N16 016 0112 1](#) [NG-9514 Gasket](#) [52006151](#) [2704](#) [1.097.2012.50](#)
[1.152.1300.01](#) [1.152.2000.50](#) [1.152.2100.01](#) [1.152.4000.50](#) [1.209.1218.70](#) [1.209.6400.71](#) [1.609.1100.01](#) [1.609.2900.15](#) [1.609.3200.52](#)
[1.609.5000.51](#) [1.609.6300.50](#) [1.676.2500.50](#) [53112705](#) [53112715](#) [53112735](#) [53119073](#) [54115405](#) [52004120](#) [52001894](#) [53018160](#)
[APGPG36BA](#) [1300990004](#) [1.033.0913.01](#) [1.033.1116.01](#) [1.033.2936.01](#)