



Heyco® Nylon Conduit Fittings


Flexilok

For Flexible, Corrugated Nylon Conduit/Tubing



FITS CONDUIT SIZE	PART NO. Black	DESCRIPTION	THREAD SIZE	PART DIMENSIONS							
				A Thread Length in. mm.		B Max Diameter in. mm.		C Max O.A. Length in. mm.		D Clearance Hole in. mm.	
PG Hubs											
13 mm	F8772	PG9 13mm FLK13-PG9	PG9	.39	10,0	.80	20,4	1.59	40,5	.60	15,2
16 mm	F8774	PG9 16mm FLK16-PG9	PG9	.39	10,0	.90	22,9	1.65	42,0	.73	18,5
13 mm	F8776	PG11 13mm FLK13-PG11	PG11	.39	10,0	.80	20,4	1.59	40,5	.60	15,2
16 mm	F8778	PG11 16mm FLK16-PG11	PG11	.39	10,0	.90	22,9	1.65	42,0	.73	18,5
16 mm	F8780	PG13 16mm FLK16-PG13	PG13,5	.39	10,0	.90	22,9	1.65	42,0	.80	20,3
21 mm	F8782	PG13 21mm FLK21-PG13	PG13,5	.43	11,0	1.12	28,5	1.76	44,6	.89	22,6
16 mm	F8784	PG16 16mm FLK16-PG16	PG16	.39	10,0	.90	22,9	1.71	43,4	.80	20,3
21 mm	F8786	PG16 21mm FLK21-PG16	PG16	.43	11,0	1.12	28,5	1.81	46,0	.89	22,6
28 mm	F8788	PG21 28mm FLK28-PG21	PG21	.47	12,0	1.43	36,3	1.99	50,6	1.12	28,5
34 mm	F8790	PG29 34mm FLK34-PG29	PG29	.47	12,0	1.69	43,0	2.11	53,6	1.47	37,3
Metric Hubs											
13 mm	F8802	M16 13mm FLKN13-M16	M16 x 1,5	.45	11,5	.80	20,4	1.65	42,0	.63	16,0
16 mm	F8804	M16 16mm FLKN16-M16	M16 x 1,5	.45	11,5	.90	22,9	1.72	43,6	.79	20,1
13 mm	F8806	M20 13mm FLKN13-M20	M20 x 1,5	.55	14,0	.80	20,4	1.75	44,5	.63	16,0
16 mm	F8808	M20 16mm FLKN16-M20	M20 x 1,5	.55	14,0	.90	22,9	1.81	46,0	.79	20,1
21 mm	F8812	M20 21mm FLKN21-M20	M20 x 1,5	.55	14,0	1.12	28,5	1.92	48,7	.99	25,2
25 mm	F8814	M25 25mm FLKN25-M25	M25 x 1,5	.59	15,0	1.28	32,6	2.06	52,3	.99	25,2
28 mm	F8816	M25 28mm FLKN28-M25	M25 x 1,5	.59	15,0	1.43	36,3	2.12	53,8	1.26	32,0
34 mm	F8818	M32 34mm FLKN34-M32	M32 x 1,5	.63	16,0	1.69	43,0	2.26	57,5	1.26	32,0

- One piece fast fit allows for quick installation.
- Slim-line design is a space saver.
- No threading of the conduit/tubing is required to install.
- For use with Heyco Nylon Corrugated Conduit/Tubing. See pages 2-19 and 2-20.
- Low fire hazard. Halogen, sulfur, and phosphorus free.
- IP 66 rating—protection against dust and water penetration.
- Suitable for use with both coarse and/or fine pitch conduit/tubing.
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL certification or testing.)
- UV Resistant.

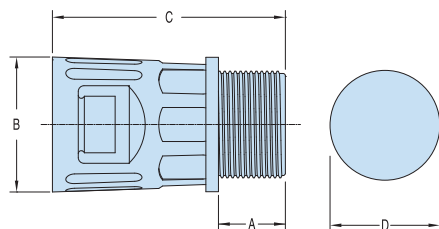

Material	Nylon 6/6
Certifications	CE Approved as per EN61386
Temperature Rating	-58°F (-50°C) to 275°F (135°C)
IP Rating	IP 66

Quick Specs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Conduit Fittings & Accessories](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[M3231GAB](#) [M3231GAC](#) [M3231GAE](#) [M3231GL](#) [M3231GT](#) [VC-937-16/RED](#) [VC-562-16/RED](#) [VC-1125-16/RED](#) [DM0240-1/2A](#) [3408B](#)
[G6002](#) [M4340GAE](#) [C2016-P](#) [C2012-P](#) [3407B](#) [1660-P](#) [561-87BG11BLK](#) [561-75BG11B](#) [1.533.1201.50](#) [1.533.1601.51](#) [1.533.4001.50](#)
[1.533.5001.50](#) [BVNV-P428](#) [BVBV-P366](#) [2276](#) [2663-P](#) [3405B](#) [C2070-P](#) [3582V](#) [4975](#) [2644-P](#) [2955](#) [M50](#) [2404-P](#) [2291](#) [2133-P](#) [3048F](#)
[VC12516](#) [RC156-0500](#) [DM0523-1/2A](#) [1035A](#) [DMS0250-1A](#) [DMS0313-1A](#) [1040A](#) [1050A](#) [R1/8A](#) [DMPC0490-1/2A](#) [DMPC0521-1/2A](#)
[DMPC0552-1/2A](#) [1070A](#) [R1/2A](#)