




- Heyco Series PST Plugs for Square Tubing **finish raw tubing ends** with a clean finish.
- Sized for different gauges, **fit flush with tubing sides.**
- **Keep dirt and moisture out** of sensitive areas.
- All PST Series Plugs are **.50" (12,7 mm) in depth.**
- **Protect against injury** from sharp tubing edges.
- See page 6-50 for HEYCaps and Plugs for Round Tubing
- See page 6-52 for Heyco Plugs for Rectangular Tubing.

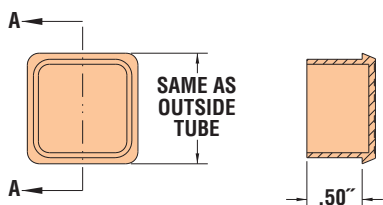

Heyco® Plugs for Square Tubing

PST Series - Clearance Fit


TUBE DIMENSIONS				Typical Gauge	PART NO. Black	DESCRIPTION
Outside Dimension		Inside Dimension				
in.	mm.	in.	mm.			
.50	12,7	.37	9,4	16	G5260	PST 50-16
.75	19,1	.62	15,7	16	G5261	PST 75-16
1.00	25,4	.76	19,3	11	G5262	PST 100-11
		.83	21,1	14	G5263	PST 100-14
		.87	22,1	16	G5264	PST 100-16
		.90	22,9	18	G5265	PST 100-18
		.93	23,6	20	G5266	PST 100-20
1.25	31,8	1.01	25,7	11	G5267	PST 125-11
		1.08	27,4	14	G5268	PST 125-14
		1.12	28,4	16	G5269	PST 125-16
1.50	38,1	1.26	32,0	11	G5270	PST 150-11
		1.33	33,9	14	G5271	PST 150-14
		1.37	34,8	16	G5272	PST 150-16
2.00	50,8	1.76	44,7	11	G5273	PST 200-11
		1.83	46,6	14	G5274	PST 200-14
		1.87	47,5	16	G5275	PST 200-16

Standard color black.

PSTR Series - Ribbed Fit

TUBE DIMENSIONS					PART NO. Black	DESCRIPTION	PART DIMENSIONS			
Inside Dimension Range		Typical Gauge	A Outside Dimension				B Depth			
Minimum	Maximum		Dimension				in. mm.			
in.	mm.		in.	mm.	in.	mm.				
.37	9,4	.40	10,2	16 - 18	G5280	PST R-50-16	.50	12,7	.44	11,2
.46	11,8	.56	14,2	14 - 20	G5281	PST R-63-14	.63	15,9	.43	10,9
.48	12,2	.58	14,8	10 - 14	G5282	PST R-75-10	.75	19,1		
.58	14,8	.68	17,3	14 - 20	G5283	PST R-75-14	.75	19,1		
.71	18,1	.81	20,6	14 - 20	G5284	PST R-88-14	.88	22,2		
.73	18,6	.83	21,2	10 - 14	G5285	PST R-100-10	1.00	25,4		
.83	21,2	.93	23,6	14 - 20	G5287	PST R-100-14	1.00	25,4	.49	12,4
.96	24,5	1.06	26,9	14 - 20	G5289	PST R-113-14	1.13	28,6		
.98	24,9	1.08	27,5	10 - 14	G5290	PST R-125-10	1.25	31,8	.52	13,2
1.08	27,5	1.18	30,0	14 - 20	G5291	PST R-125-14	1.25	31,8		
1.11	28,2	1.21	30,8	10 - 14	G5292	PST R-138-10	1.38	34,9		
1.21	30,8	1.31	33,3	14 - 20	G5293	PST R-138-14	1.38	34,9		
1.23	31,3	1.33	33,9	10 - 14	G5294	PST R-150-10	1.50	38,1		
1.33	33,9	1.43	36,3	14 - 20	G5295	PST R-150-14	1.50	38,1		
1.48	37,6	1.58	40,2	10 - 14	G5296	PST R-170-10	1.75	44,5		
1.58	40,2	1.68	42,7	14 - 20	G5297	PST R-170-14	1.75	44,5		
1.52	38,7	1.67	42,4	4 - 8	G5298	PST R-200-04	2.00	50,8		
1.73	44,0	1.83	46,6	10 - 14	G5299	PST R-200-10				
1.83	46,6	1.93	49,0	14 - 20	G5300	PST R-200-14	2.50	63,5		
1.98	50,3	2.08	52,9	10 - 14	G5301	PST R-225-10			2.25	57,2
2.09	53,2	2.23	56,7	6 - 10	G5302	PST R-250-06			2.50	63,5
2.23	56,7	2.33	59,3	10 - 14	G5303	PST R-250-10	2.50	63,5	.50	12,7
2.37	60,2	2.45	62,2	16 - 23	G5304	PST R-250-16	2.50	63,5		

Standard color black.

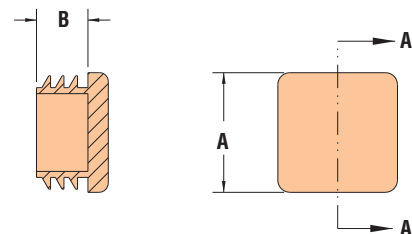

Material LDPE
 Temperature Range -94°F (-70°C) to 150°F (66°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Ducting & Raceways](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[800A-LB](#) [801I-LSP](#) [802A-ECSP](#) [802I-ICSP](#) [923223-000](#) [PRAF6WH-X](#) [A0405538](#) [1301150342](#) [1301160034](#) [1301170070](#) [1301180011](#)
[1301230083](#) [1301230153](#) [1301240273](#) [1301250006](#) [1302261238](#) [1302261321](#) [1302262552](#) [1302263103](#) [1302263178](#) [1302263259](#)
[1302263816](#) [1302263860](#) [1302264375](#) [1302264390](#) [1301150343](#) [1301160030](#) [1301170050](#) [1301170051](#) [1301170061](#) [1301180013](#)
[1301230086](#) [1301230130](#) [1301240054](#) [1302260055](#) [1302260376](#) [1302261343](#) [1302261344](#) [1302262674](#) [1302263095](#) [1302263166](#)
[1302263209](#) [1302263513](#) [1302263851](#) [1302263870](#) [1302264137](#) [1302264218](#) [DD1/J](#) [AX101472](#) [AX102007](#)