

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

**NO O-RING  
REQUIRED!**



## Heyco®-Tite Liquid Tight Cordgrips

**Pigtail™, NPT Hubs with Integral Sealing Ring**




*The Ultimate in Liquid Tight Strain Relief Protection*

- Flexible Pigtail extender prevents sharp bends and extends cable life.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .705" (17,9 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Locknuts not included.** For nylon locknut specifications or to order locknuts separately, see page 3-47.
- For Heyco Liquid Tight Threaded Plugs, see page 3-51.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO. Locknuts Not Included* Black	DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum		Maximum					A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Flat Size	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
.065	1,7	.210	5,3	<b>M4536</b>	Flex RLTCG 1/4	RA	.540	13,7	2.57	65,3	.45	11,4	.21	5,3	.63	16,0
.115	2,9	.250	6,4	<b>M4538</b>	Flex LTCG 1/4		.680	17,3	2.94	74,7	.49	12,4	.21	5,3	.82	20,8
.065	1,7	.230	5,8	<b>M3474</b>	Flex RLTCG 3/8	RA	.875	22,2	4.09	103,9	.61	15,5	.21	5,3	.98	24,9
.105	2,7	.315	8,0	<b>M3254</b>	Flex LTCG 3/8		.875	22,2	4.37	111,0	.44	11,2	.25	6,4	1.06	26,9
.095	2,4	.290	7,4	<b>M4540</b>	Flex RLTCG 1/2	UL	1.040	26,4	5.15	130,8	.62	15,7	.25	6,4	1.30	33,0
.170	4,3	.450	11,4	<b>M3251</b>	Flex LTCG 1/2		.875	22,2	4.37	111,0	.44	11,2	.25	6,4	1.06	26,9
.260	6,6	.546	13,9	<b>M3266</b>	Flex LTCG LL 1/2	UL										
.250	6,4	.490	12,4	<b>M3462</b>	Flex RLTCG 3/4											
.435	11,0	.705	17,9	<b>M3239</b>	Flex LTCG 3/4	UL										

Standard color black.

\*To order Nylon or Metal Locknuts separately, see pages 3-47 and 3-48.

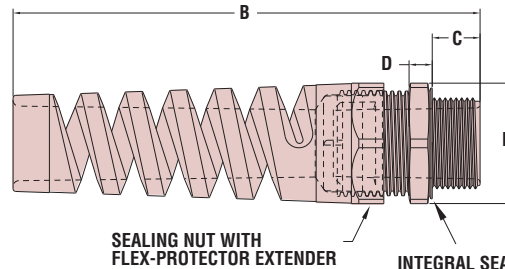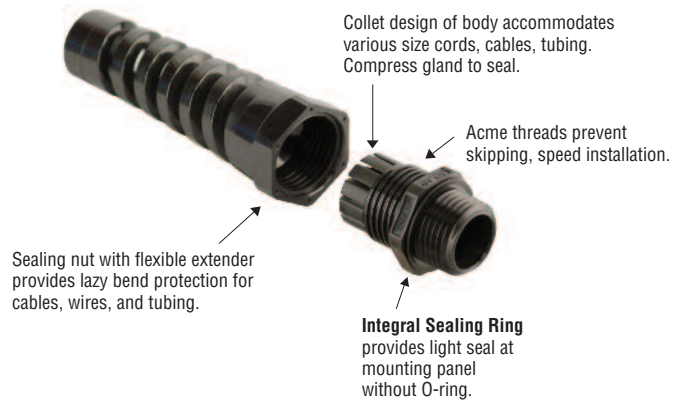

*Quick  
Specs*

Material	Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>RA Recognized under the Component Program of Underwriters' Laboratories File E51579</li> <li>SF Certified by Canadian Standard Association File 93876C</li> </ul>
Flammability Rating	94V-2
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[1218](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [915](#) [300623](#) [5632NM](#) [1124](#) [1151](#) [561-MP6P4WH](#) [5534M](#) [9000005073](#) [52104486](#)  
[5315817](#) [N16 025 0112 1](#) [N16 020 0112 1](#) [M6106](#) [7422](#) [NG-9516 Gasket](#) [N16 016 0112 1](#) [NG-9514 Gasket](#) [52006151](#) [2704](#) [BM4940L](#)  
[BM4950L](#) [1.097.2012.50](#) [1.152.1300.01](#) [1.152.2000.50](#) [1.152.2100.01](#) [1.152.2500.50](#) [1.152.4000.50](#) [1.209.1218.70](#) [1.209.2100.15](#)  
[1.209.6400.71](#) [1.609.1100.01](#) [1.609.2900.15](#) [1.609.3200.52](#) [1.609.3600.15](#) [1.609.5000.51](#) [1.609.6300.50](#) [1.676.2500.50](#) [52103150](#) [53112705](#)  
[53112715](#) [53112735](#) [53119073](#) [54115405](#) [52004120](#) [52001894](#)